XGT7530-20

外形尺寸 DIMENSIONS

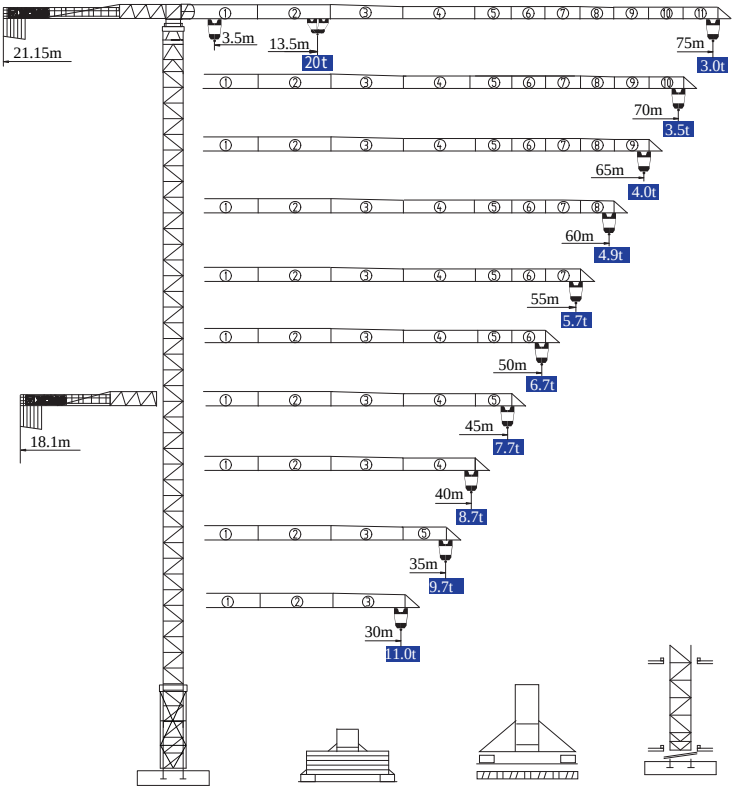

固定式
Stationary

底架压重式
Under frame loading

底架行走式
Travelling

内爬式
Inner-climbing type

★ 可变换的其它安装方式同我们协商 Mounting possibilities Consult us

平头系列 **Topless**

XGT7530-20

技术状态 STATUS

XGT7530-20

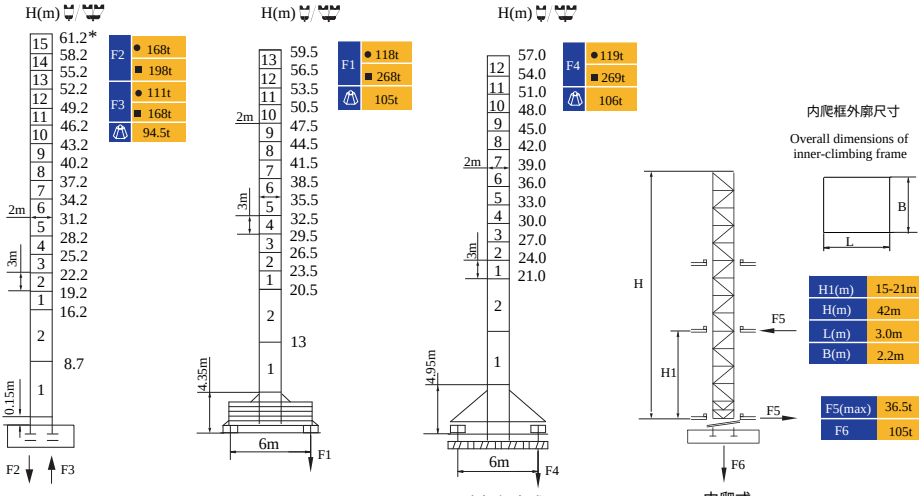

固定式
Stationary

底架压重式
Under frame loading

底架行走式
Travelling

内爬式
Inner-climbing type

H 吊钩高度 Height of the hook ● 工作状态 In service ■ 非工作状态 Out of service

不含平衡重最大臂长最大工作高度时的自重 Without load and ballast with longest jib and maximum height

* 非工作状态爬升架降至底部 Ower the climbing frame to the bottom of tower body when tower crane is out of service

附 着 ANCHORAGES

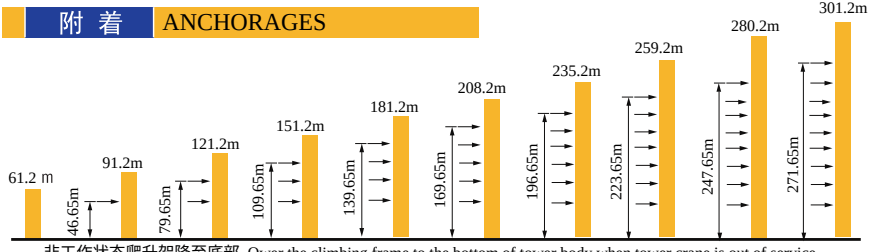

非工作状态爬升架降至底部 Ower the climbing frame to the bottom of tower body when tower crane is out of service

* 如需达到更高的高度，请与我们联系！ For greater heights,consult us!

XGT7530-20

起重特性 LOAD DIAGRAMS

起重臂(m) jib		R min	R(Cmax)	C max	幅 度(m) Range												
					15	20	25	30	35	40	45	50	55	60	65	70	75
75m		3.5	26.8	10000	10000			8861	7465	6419	5605	4953	4420	3976	3601	3279	3000
		3.5	13.5	20000	17797	12913	9982	8028	6633	5586	4772	4121	3588	3144	2768	2446	2167
70m		3.5	28.3	10000	10000			9376	7907	6805	5948	5263	4702	4234	3839	3500	
		3.5	14.2	20000	18828	13686	10601	8544	7075	5973	5116	4430	3869	3402	3006	2667	
65m		3.5	29.2	10000	10000			9725	8206	7067	6181	5472	4892	4408	4000		
		3.5	14.6	20000	19526	14209	11019	8892	7373	6234	5348	4639	4059	3576	3167		
60m		3.5	31.9	10000	10000				9048	7803	6835	6061	5427	4900			
		3.5	16	20000	20000	15682	12198	9875	8215	6971	6003	5228	4595	4067			
55m		3.5	33.3	10000	10000				9475	8177	7167	6360	5700				
		3.5	16.7	20000	20000	16430	12796	10373	8643	7345	6335	5528	4867				
50m		3.5	33.3	10000	10000				9960	8601	7545	6700					
		3.5	16.7	20000	20000	17278	13475	10939	9127	7769	6712	5867					
45m		3.5	35.5	10000	10000				10000	8775	7700						
		3.5	17.8	20000	20000	17626	13753	11171	9326	7943	6867						
40m		3.5	35.2	10000	10000					8700							
		3.5	17.6	20000	20000	17475	13631	11069	9239	7863							
35m		3.5	34	10000	10000				9700								
		3.5	17.1	20000	20000	16938	13225	10750	8982								
30m		3.5	30	10000	10000												
		3.5	17.6	20000	20000	17370	13539	11000									

★ 其他起重性能需求，请与我们联系！Anyother lifting capacity,consult us!

配重配置 BALLAST

Counter-jib ballast		3640 – 1300		
		(kg)	PZ3640	PZ1300
75m	21.15m	20800	5	2
70m	21.15m	19500	5	1
65m	21.15m	18200	5	0
60m	21.15m	17160	4	2
55m	21.15m	17160	4	2
50m	18.1m	20800	5	2
45m	18.1m	18200	5	0
40m	18.1m	15860	4	1
35m	18.1m	13520	3	2
30m	18.1m	12220	3	1

XGT7530-20

传动机构 Mechanisms

机构 Mechanisms	图例 Example	机构代号 Model	速度 (m/min) Speed		起重量 (t) Hoist Weight	容绳量 Rope Capacity	功率（kW） Power
起升 Hoisting		90JLF50Z		0-90	2.5	610m >610m*	90
				0-65	5.0		
				0-45	10.0		
				0-45	5.0		
				0-32.5	10.0		
				0-22.5	20.0		
变幅 Trolleying		11JXF10	0-65m/min				11
回转 Slewing		145HL120	0-0.7r/min				2×9
行走 Travelling		RT	0-25m/min				4×5.2
电源 Main Supply						～380V（±10％） 50Hz	
总功率(不含顶升和行走) Gross Power (Excluding climbing and travelling)						119kW	

★ 请与我们联系 Consult us, Please!

此样本所列技术参数不受法律约束，具体请详见相应产品说明书

These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.

V. 2017-11A1