




**XCMG For Your Success**

**XE215C**  
HYDRAULIC EXCAVATOR

WWW.XCMG.COM

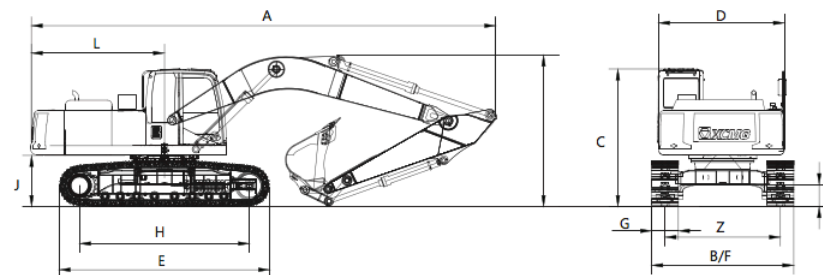

Shipping Dimensions(mm)	A	B	C	D	E	F	G	H	I	J	K	L	Total (m <sup>2</sup> )
<b>XE215C</b>	10001	3140	3150	2846	4484	3140	630	3635	2510	1103	494	2888	89

**Configuration**

Name	Model (Manufacturer)
Engine	BB-6BG1TRP, ISUZU
Radiator	Tokyo
Main valve	Kawasaki
Main pump	Kawasaki
Walking motor	KYB
Steering motor	Kawasaki
Cylinder	Hengli
Electric system	Kawasaki
Cab	Benyu
A/C	Modine
Seat	KAB
Traveling mechanism	Shantui

**Configuration**

Item	Unit	XE215C
<b>Driving characteristics</b>		
Speed	km/h	5.5/3.3
Swinging speed	r/min	13.3
Gradeability	°	≤35
Ground pressure	kPa	45.5
Bucket digging force	kN	138
Arm digging force	kN	103
Max. Traction force	kN	184
<b>Hydraulic system</b>		
Main pump flow	L/min	2×206
Main safety valve pressure	MPa	32.3/34.3
Walking system pressure	MPa	34.3
Slewing system pressure	MPa	28
Pilot system pressure	MPa	3.9
<b>Capacities</b>		
Fuel oil tank capacity	L	360
Hydraulic oil tank capacity	L	220
Engine oil tank capacity	L	25
<b>Operating range</b>		
Max. Digging reach	mm	9640
Max. Dumping reach	mm	6800
Max. Digging depth	mm	6655
8-inch horizontalplane digging depth	mm	6470
Max. Vertical digging depth	mm	5695
Max. Digging radius	mm	9925
Min. Swinging radius	mm	3530

**Technical Data**

Item	Unit	XE215C
<b>Basic parameters</b>		
Rated power(Engine)	kw	106.5
Rated speed(Engine)	r/min	1950
Operating weight	kg	21450
Bucket capacity	m <sup>3</sup>	0.8~1.0



Please contact with our district agent:

Materials and specifications are subject to change with out notice.