


XCA450 全地面起重机 / All Terrain Crane

技术规格书


Basic technical specification



450 t



80 m



130 m



目录



Contents

目录 Contents	
尺寸参数 Dimensions	3
技术规格 Technical Specifications	4-8
重量/作业速度 Weight / Working speeds	9-10
运输部件尺寸 Transportation components dimension	11-14
平衡重 Counterweight	15
臂架组合方案 Boom / Jib combinations	16-20
主臂 Boom	21-27
主臂+超起 Boom + Super lifting device	28-33
主臂+风电臂 Boom + Wind power arm	34-36
主臂+固定副臂 Boom + Fixed Jib	37-69
主臂+固定副臂+超起 Boom + Fixed Jib + Super lifting device	70-93
主臂+变幅副臂+超起 Boom + Luffing Jib + Super lifting device	94-102
符号标识 Description of symbols	103
主要技术参数表 Transportation plan	104-105
注意事项 Notes	106

尺寸参数

Dimensions

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

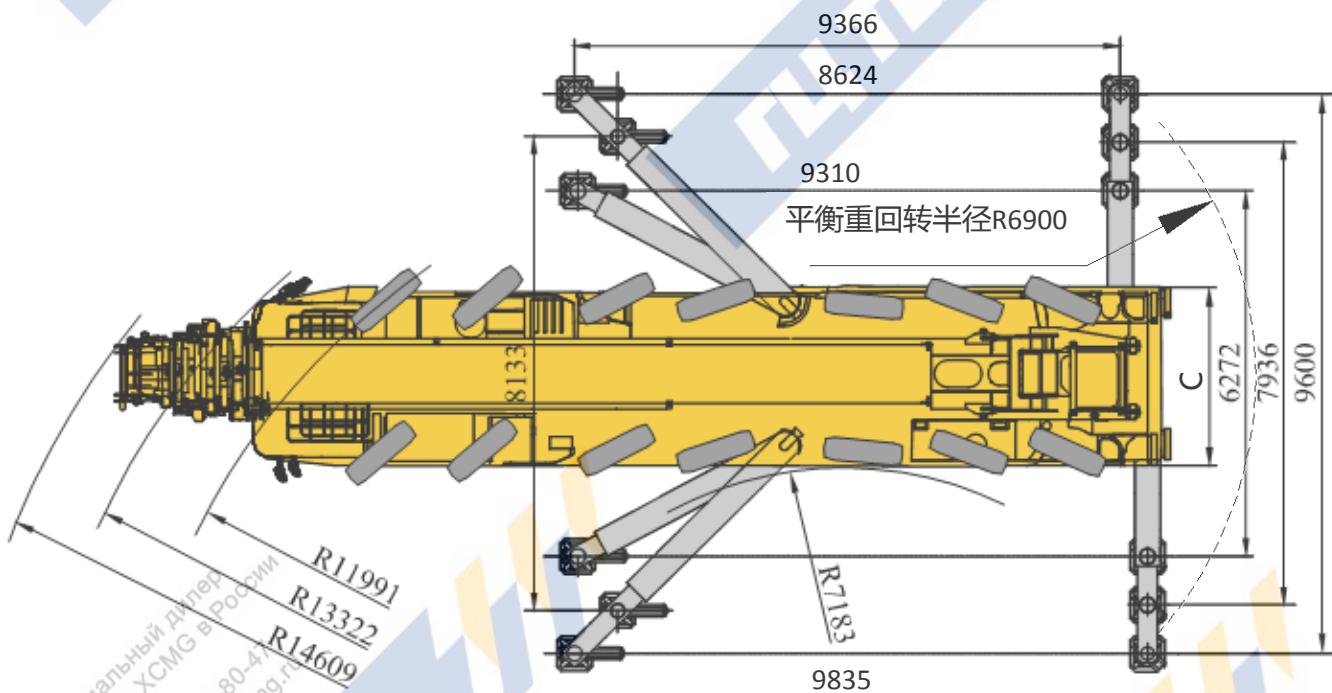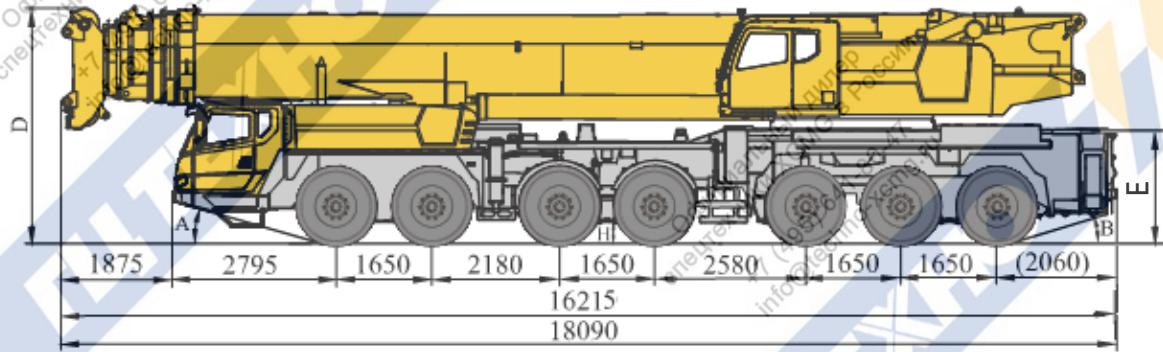

	A	B	C	D	E	H
385/95 R 25 (14.00 R 25)	16°	17°	3000mm	4000mm	1954mm	280mm
445/95 R 25 (选装) (16.00 R 25)	17°	18°	3000mm	4050mm	2004mm	330mm

技术规格

Technical specifications

	底盘 配置
车架	徐工设计、制造，倒梯形截面结构，高强度钢材制造。
支腿	4支腿，K形布置，采用双级水平支腿，侧摆、水平伸缩和垂直伸缩由液压控制。支腿油缸均设有单向阀，且垂直支腿带有双向液压锁；同时具有两个辅助支腿，可以实现前活动支腿的自拆装；底盘两侧装有电控操纵控制台，控制台板装有夜光水平仪、照明灯和增速按钮。
发动机	OM502LA.E3A/3，V形八缸水冷电控柴油发动机，戴姆勒制造，额定功率421.5kw /1800rpm，最大扭矩2700N.m /1300rpm，国三排放标准。 燃油箱容积：550L。 OM502LA.E3B/2，V形八缸水冷电控柴油发动机，戴姆勒制造，额定功率442.6kw /1800rpm，最大扭矩2800N.m /1300rpm，国五排放标准。 燃油箱容积：550L。
液压系统	变量泵通过取力器联接至发动机，用于支腿、转向、悬挂和散热。
变速箱	美国艾利逊电控变速箱，自动AT操纵、带变矩器、缓速制动，7个前进档，1个倒档。
分动箱	德国KESSLER机械式分动箱，装有应急转向油泵。
车桥	德国KESSLER高强度车桥，配备气控盘式制动器。4桥驱动：14×8×14。

	底盘 配置
悬挂	所有车桥均采用油气悬挂系统，减震效果好，具有自动调平、悬架升降、弹性刚性转换等功能。 悬架油缸行程：-100mm ~ +140mm。
轮胎	14个轮胎，每桥均装单胎，承载力大。 轮胎规格：385/95R25 (14.00R25) 14个轮胎，每桥均装单胎，承载力大。 轮胎规格：445/95R25 (16.00R25)
转向	全桥转向，1~3轴为机械加液压助力转向，4~7轴为电液控制转向，可适应多种工况的要求，实现多种转向模式。
制动	行车制动：双回路气压制动，作用于所有车轮。 驻车制动：弹簧贮能制动，作用于2-6轴车轮。 辅助制动：发动机制动，变速箱缓速制动，电涡流缓速制动。
驾驶室	新型钢结构豪华全宽驾驶室，采用悬浮式连接结构，后部装有减震器。配备电动升降器的安全玻璃、可调式座椅、电动调节后视镜、可调节高度及角度方向盘，大屏幕彩色液晶显示器等。新型组合式中控台布局安全合理，采用圆弧造型，体现人性化的设计。
电气系统	直流24伏特，4个12伏电池组串并联。

技术规格

Technical specifications

	上车	配置
结构	徐工设计、制造，高强度钢材制造。	●
液压系统	电比例变量泵用于起升、回转，开式泵用于变幅、伸缩。采用进口电液换向阀，与变量柱塞泵进行良好的匹配	●
	启停平稳，大功率风冷式液压油冷却器，有效降低系统油温。	●
操纵方式	先导电比例操纵，无级调速，由左右2个操纵手柄控制起重机的全部动作。	●
主起升机构	由液压马达驱动，内置行星齿轮速器和常闭式制动器。双折线绳槽卷筒，构	●
	进口钢丝绳，配置袋式索具。	●
回转机构	三排滚柱外齿式回转支承，双回转机构，由液压马达驱动，内置行星齿轮减速器和常闭式制动器，可连续回转360°，具有动力控制或自由回转的功能，可无级调速。	●
操纵室	带大圆弧玻璃，外开式车门，可调式座椅，装有安全玻璃和顶部保护栏，配备力矩限制器、电控箱、电动前窗刮水器、发动机动力加速踏板、发动机起动开关、前顶窗双层遮阳帘、后窗遮阳帘等。	●
	标配冷暖空调。	●
安全装置	液压平衡阀、液压溢流阀、液压双向锁、力矩限制器；操纵杆弹簧式回中系统；三圈保护器，防止钢丝绳过放臂头设置高度限位，防止钢丝绳过卷风速仪，检测高空风速。	●
组合配重	总重160t，有0t、40t、60t、80t、100t、120t、140t和160t 8种组合方式。	●

	上车	配置
力矩限制器	当实际力矩接近过载时，发出听视警报，并在过载之前自动停止危险动作。具有超载记忆功能（黑匣子）和故障自诊断功能。	●
电气系统	直流24伏特，4个12伏电池组串联。	●
吊钩	225吨吊钩 175吨吊钩 90吨吊钩 40吊钩	○ ● ● ●
变幅卷扬机构	包括变幅滑轮组，用于变幅副臂的变幅。	○
主臂	7节，“U”形截面的筒形焊接结构，单缸插销伸缩机构，1个装有安全阀的双作用的伸缩油缸，控制所有吊臂的伸缩，有46%、92%和全伸模式可供选择。 主臂长度：15.3m ~ 80m。	●
固定副臂	桁架式焊接结构，有0°、20°和40°三种安装角度。 固定副臂长度：6m ~ 42m。	○
变幅副臂	桁架式焊接结构，具有68°、75°、82°三种主臂仰角。 84m变幅副臂（含固定副臂） 54m变幅副臂（含固定副臂） 84m变幅副臂 54m变幅副臂	○ ○ ○ ○
超起	Y型，安装在基本臂端部，双倍率超起钢丝绳设计，使超起拉力成倍提升。大臂长状态下挠度减小20% ~ 30%，起重性能成倍提升。	○

技术规格

Technical specifications



上车

配置

风电 衔架式结构，有0°和13°两种安装角

臂头 度

风电臂长度：10m（含超起）

产品各部件明细如上所述，具体部件明细请
参照产品报价单

符号说明：

- —— 表示标准配置；
- —— 表示选装配置。

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

技术规格

Technical specifications



Chassis

Frame Designed and manufactured by XCMG, made of high strength steel with inverted trapezoid cross section.

Outriggers 4 outriggers with two-stage outrigger beam structure and K-shaped arrangement, hydraulically telescope into horizontal and vertical direction. Check valve is fitted at each outrigger oil cylinder and each jack is fitted with a double-way hydraulic valve. There are two auxiliary outriggers for helping self-mounting of front outrigger beams. There is an electric control panel fitted at each side of the chassis with luminous level gauge, lamp and accelerator buttons.

Engine OM502LA.E3A/3, V-type eight-cylinder water cooled, electric control diesel engine, manufactured by Daimler AG, with rated power of 421.5kw /1800rpm, and max. torque of 2700N.m /1300 rpm; compliant with China National III emission standard.

Fuel tank capacity: 550L.

OM502LA.E3B/2, V-type eight-cylinder water cooled, electric control diesel engine, manufactured by Daimler AG, with rated power of 442.6kw / 1800 rpm, and max. torque of 2800N.m /1300rpm; compliant with China V emission standard. Fuel tank capacity: approx. 550L.

Hydraulic system The variable displacement pump is connected to the engine through PTO for controlling the movements of outriggers, steering, suspension and heat dissipation.

Transmission American Allison electric control transmission with automatic operation, torque converter and retarder brake; 7 forward gears and 1 reverse gear.

Transfer case German KESSLER mechanical transfer case gear is equipped with emergency steering pump.

Axles High strength axle with reliable performance, imported originally from KESSLER Germany, equipped with pneumatically controlled disc brake. Four axles for driving: $14 \times 8 \times 14$.

Configuration



Chassis

Suspension Hydro-pneumatic suspension is adopted for all axles, providing good shock absorbing effect. Functions of automatic leveling, suspension lifting, elastic/rigid state switch-over, etc. are available. The stroke of suspension cylinder is -100mm~+140mm.

Tires 14 tires, each axle is equipped with single tire, Tire specifications: 385/95R25(14.00R25).

14 tires, each axle is equipped with single tire, with large bearing capacity. Tire specifications: 445/95R25(16.00R25)

Steering All axles steering, 1st to 3rd axles are mechanically steered plus hydraulic booster, 4th to 7th axles are electric-control hydraulic steering. It is suitable for various demands of working conditions and several steering modes can be realized.

Brakes Service brake: double-circuit air pressure brake, acting on all wheels.

Parking brake: spring-loaded brake, acting on wheels of axles 2-6.

Auxiliary brake: engine brake, transmission retarder brake and eddy current retarder brake.

Driver's cab New type steel structure full dimension cab with suspension connecting structure, and there is shock absorb fitted at the rear of the cab, equipped with adjustable seats, safety glass, electrically operated door window lifter, electric-adjustable mirrors, steering wheel adjustable in height and angle, large screen liquid crystal display, etc. Combined control panel arranged safely, reasonably and ergonomically presents humanized design concept.

Electrical System DC 24 V, with four sets of 12 V batteries in series and parallel.

技术规格

Technical specifications

	Superstructure	Configuration
Frame	Designed and manufactured by XCMG, made of high-strength steel.	●
Hydra ulic system	Electric proportional variable pump is used for lifting and slewing operations; the open pump is used for telescoping and elevating operations. Imported electro-hydraulic change valve, matching perfectly and stably with variable piston pump, contributes to smooth starting and stopping. Large power air-cooled hydraulic oil cooler, which may effectively reduce the oil temperature in the system.	●
Operat ing mode	Infinite speed regulation, electric proportional pilot control. All movements are controlled by 2 control levers.	●
Main winch	Driven by a hydraulic motor, with build-in planetary gear reducer and constant closed brake. Drum with Lebus grooves, imported wire rope and pouch socket are available.	●
Slewin g system	three row roller external tooth slewing ring and right-arranged double slewing mechanism. driven by a hydraulic motor, with a planetary gear reducer and a normally closed brake equipped, for 360° continuous rotation. Power control and free slewing function as well as stepless speed regulation are available.	●
Operat or's cab	Large arc glass, swing-out door, adjustable seat , equipped with safety glass and top protective rails, LMI, controller box, electric wind shield wipers, engine accelerator pedal, engine start switch and windshield visor, etc. are also available. heater and air conditioner are standard.	●
Safety	Hydraulic counterbalance valve, hydraulic devices relief valve, hydraulic double-way valve, LMI, joystick spring return system are available. Lowering limiter is equipped in winch to prevent rope over-releasing. Anti-two block is fitted on the boom head to prevent rope over-winding. Anemometer is equipped to check whether aerial wind velocity is in safe working range.	●
Product parts list is as mentioned above. Please refer to the product quotation for specific parts		
● — Standard		
○ — Optional		
	Superstructure	Configuration
LMI	When the actual load moment is approaching overloading value, audible warning will be sent out, and the dangerous operation will be automatically stopped ahead of overloading. Overload memory function (black box) and fault self-diagnosis function are available.	●
Combined counterwei ght	Total weight is 160t.8 counterweight combinations of 0t, 40t, 60t, 80t, 100t,120t,140tand 160t are available.	●
Electrical System	DC 24 V, with four sets of 12 V batteries in series and parallel.	●
Winch for luffing jib	It mainly consists of the elevating system for sheave block and is used for the elevating of the luffing jib.	○
Boom	7-section boom with U cross-section, welding structure. Single cylinder pinning telescoping system is adopted. One double-acting cylinder with safety valve is used for controlling the telescoping movements of all boom sections with various telescoping pattern available. Boom length: 15.3m~80m	●
Fixed jib	Lattice welding structure with 0° , 20° and 40° jib offset angles available. Fixed jib length: 6m~42m.	○
Luffing jib	Lattice type welding structure; three boom angles: 68° , 75° , 82° . Luffing jib length: 12m~84m. Luffing jib length:84m (include fixed jib) Luffing jib length:54m (include fixed jib) Luffing jib length:84m Luffing jib length:54m	○ ○ ○ ○
Super- lifting	Y-shaped, installed at top of base boom, wire rope with double parts of line contributes to twofold pulling force. With the boom extended out, the deflection could be decreased by 20% ~30%, multiplying the lifting performance.	○
Wind power arm	Lattice welding structure with 0° and 13° jib offset angles available. Wind power arm head length: 10m.	○
head		

重量 Weight



车桥 Axe	1	2	3	4	5	6	7	总重量 Total weight
t	12	12	12	12	12	12	12	84 ¹⁾
t	13.16	13.16	13.16	12.57	12.57	12.57	12.57	90 ²⁾
t	17.46	17.46	17.46	13	13	13	13	104.3 ³⁾
t	8.6	8.6	8.6	29.64	29.64	29.64	29.64	144.3 ⁴⁾

1) 上车不带平衡重、超起、臂端单滑轮、起重吊钩、副臂；下车不带前支腿、备胎、支脚盘；

驱动行驶 : 14×10 ; 轮胎规格385/95R25

1) For the superstructure, counterweight, super lifting device, single top, hook block and jib are excluded. For the chassis, front outriggers, spare tire and outrigger floats are excluded.

Driving type: 14×10; tire specification: 385/95R25

2) 上车不带平衡重、超起、臂端单滑轮、起重吊钩、副臂；

驱动行驶 : 14×10 ; 轮胎规格385/95R25

2) For the superstructure, counterweight, super lifting device, single top, hook block and jib are excluded.

Driving type: 14×10; tire specification: 385/95R25

3) 上车不带平衡重、臂端单滑轮、起重吊钩、副臂；

驱动行驶 : 14×10 ; 轮胎规格385/95R25

3) For the superstructure, counterweight, single top, hook block and jib are excluded.

Driving type: 14×10; tire specification: 385/95R25

4) 上车带40t平衡重，不带臂端单滑轮、起重吊钩、副臂；

驱动行驶 : 14×10 ; 轮胎规格385/95R25

表中正常重量及桥荷为装配385/95R25轮胎时的值；

选装445/95R25轮胎时，整机增加812kg，各轴轴荷增加116kg。

4) For the superstructure, counterweight slabs of 40t are included, while single top, hook block and jib are excluded.

Driving type: 14×10; tire specification: 385/95R25

The normal weight and axle load listed in the table are values when 385/95R25 tires are equipped.

When equipped with optional tires 445/95R25, the GVW is increased by 812kg and the axle load for each axle is added by 116 kg



吊钩 Hook block	倍率 Parts of line	吊钩重量 Weight (kg)	吊钩尺寸 Dimensions (mm)	备注 Remarks
225t	20	4000	2509×1362×900	双钩 Double hook , 选配Optional
175 t	15	3000	2216.5×1155×835	双钩 Double hook , 标配Standard
90 t	7	1900	2157×1000×780	双钩 Double hook , 标配Standard
40 t	3	1300	2004×700×573	单钩 Single hook , 标配Standard

作业速度

Working speeds



385/95 R 25 (14.00 R 25)
445/95 R 25 (选装) (16.00 R 25)

2 ~ 76
2.2~82

42%
42%



作业机构 Drive



0-135 m/min , 单绳 , 第5层 , 空载
m/min, single line, 5th layer, no load

最大单绳拉力 Max. single line pull

13.5 t

钢丝绳直径/长度 Rope diameter/ length

24 mm/490 mm



0-1.2 r/min



从-0.5°抬起至82°约90s
Approx. 90s for boom elevation from -0.5° to 82°



从15.3m伸出至80mt约900s
Approx. 900s for boom extension from 15.3m to 80m

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru







运输部件尺寸

Transportation components dimension

名称 Part Name	图示 Structure Drawing	单重 Weight (kg)	数量 Quantity	尺寸 Dimensions (mm)
连接架总成		1500	1	2400×2100×1500
翼式连接架		2820	1	3680×2963×2060
安装组件		10000	1	13206×2230×3131
加长节I		1100	2	6140×2030×1610
加长节II		1000	2	6140×1830×1310
加长节III		2000	2	12140×2030×1610
加长节IV		1900	2	12140×1830×1310

运输部件尺寸

Transportation components dimension

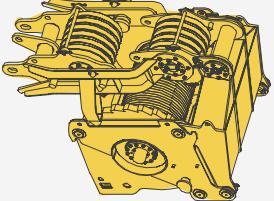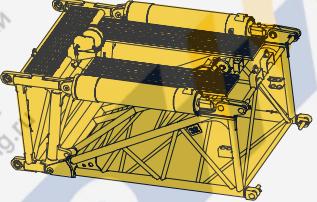名称 Part Name	图示 Structure Drawing	单重 Weight (kg)	数量 Quantity	尺寸 Dimensions (mm)
过渡节		400	1	1640×2030×1618
臂头总成		1000	1	1930×1830×2065
变幅起升机构		3800	1	2290×1500×1450
连接架		1200	1	2265×2080×1857
旋转架		3100	1	3678×2290×2016
臂头小车		980	1	2500×2100×1600
超起装置		15000	1	10524×1738×1749



运输部件尺寸

Transportation components dimension

名称 Part Name	图示 Structure Drawing	单重 Weight (kg)	数量 Quantity	尺寸 Dimensions (mm)
备胎 备胎支架		210 65	1 1	1360×1360×390 2710×350×304
配重支架		1890	1	2840×2034×758
超级支架		150	1	236×300×317+ 265×300×780
前活动支腿		2826	2	4493×1931×642
前支脚盘		60	2	1145×600×171
后支脚盘		53	2	681×600×171



运输部件尺寸

Transportation components dimension

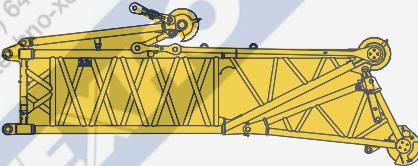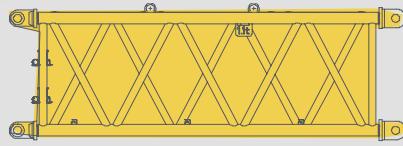名称 Part Name	图示 Structure Drawing	单重 Weight (kg)	数量 Quantity	尺寸 Dimensions (mm)
独立臂头 +7 (495) 641-80-47 info@techno-xcmg.ru		3100	1	6000×800×2300
4m加长节总成 +7 (495) 641-80-47 info@techno-xcmg.ru		1000	1	4000×800×1200

平衡重

Counterweight

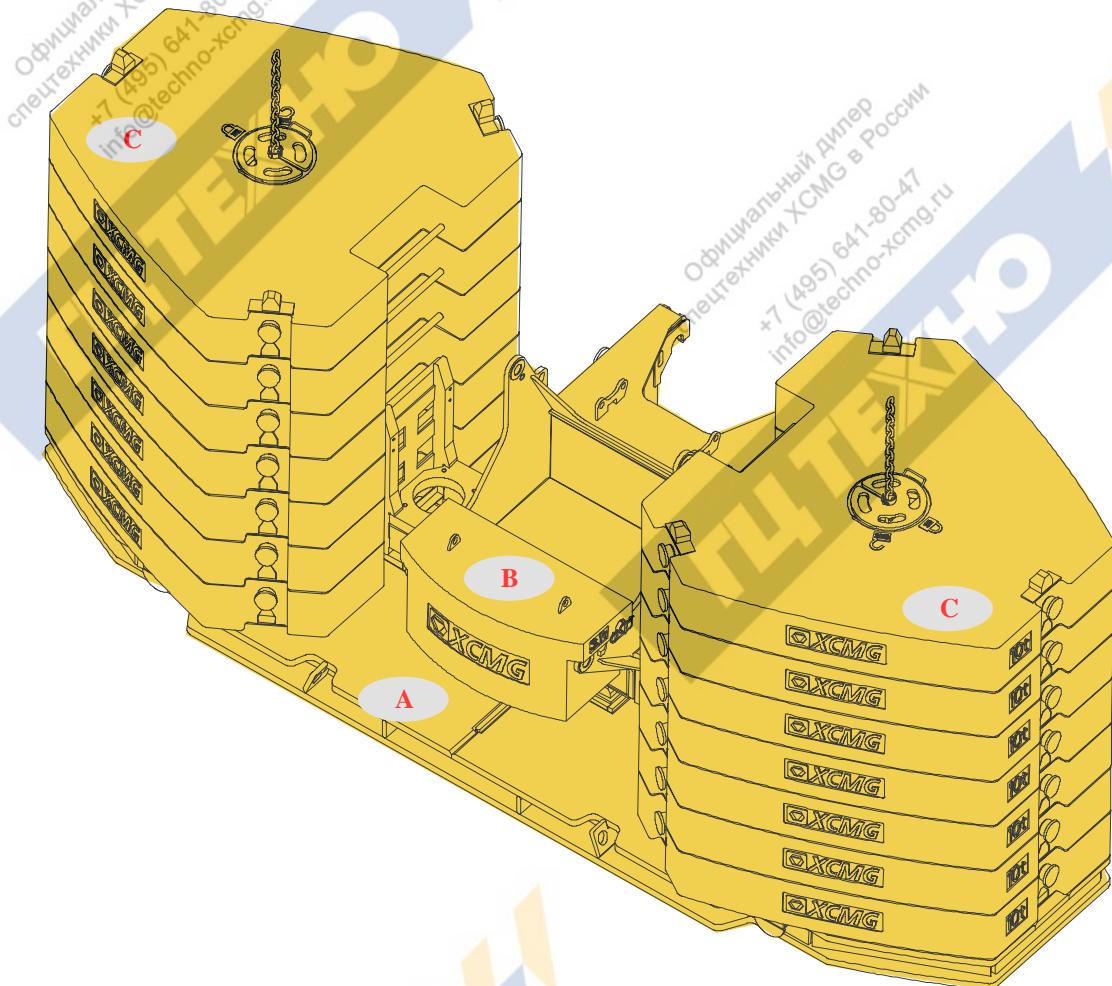

平衡重
Counterweight

	A	B	C
尺寸 (长×宽×高) mm Size (L×W×H) mm	6988×2790×2025	1400×835×623	2552×2350×515
重量 t Weight (t)	18	10	

工况模式 Working mode	160t	140t	120 t	100 t	80 t	60 t	40 t
组合形式 Combinations	A+B+C×14	A+B+C×12	A+B+C×10	A+B+C×8	A+B+C×6	A+B+C×4	A+B+C×2

臂架组合方案

Boom / Jib combinations


风电臂-10m
JFWTA-10m



固定副臂 - 6m
Fixed jib - 6m



固定副臂 - 12m
Fixed jib - 12m




固定副臂 - 18m
Fixed jib - 18m




固定副臂 - 24m
Fixed jib - 24m



固定副臂 - 30m
Fixed jib - 30m



固定副臂 - 36m
Fixed jib - 36m



固定副臂 - 42m
Fixed jib - 42m



Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru


臂架组合方案

Boom / Jib combinations


变幅副臂 - 12m
Luffing jib - 12m




变幅副臂 - 18m
Luffing jib - 18m




变幅副臂 - 24m
Luffing jib - 24m




变幅副臂 - 30m
Luffing jib - 30m



变幅副臂 - 36m
Luffing jib - 36m




变幅副臂 - 42m
Luffing jib - 42m




变幅副臂 - 48m
Luffing jib - 48m




变幅副臂 - 54m
Luffing jib - 54m



变幅副臂 - 60m
Luffing jib - 60m




变幅副臂 - 66m
Luffing jib - 66m



变幅副臂 - 72m
Luffing jib - 72m



变幅副臂 - 78m
Luffing jib - 78m




变幅副臂 - 84m
Luffing jib - 84m



臂架组合方案

Boom / Jib combinations

部件 Component	结构形式 Structure	尺寸(长×宽×高) m Size (L×W×H) m	重量 kg Weight kg
连接架 I Connecting bracket I		2.2×2.0×1.6	1200
翼型连接架 Wing-type connecting bracket		3.7×2.8×1.9	2930
旋转架 Rotating bracket		3.7×2.0×1.6	3140
连接架II Connecting bracket II		2.4×2.4×2.1	1600
安装组件 Installation assembly		13.4×2.1×3.1	10000
副臂加长节 I Jib insert I		6.2×2.1×1.6	1100
副臂加长节 II Jib insert II		6.2×1.9×1.3	1000
副臂加长节 III Jib insert III		12.5×2.1×1.6	2000
副臂加长节 IV Jib insert IV		12.5×1.9×1.3	1900
4m加长节总成 Jib insert of 4m		4.0×0.83×1.2	1020
过渡节 Transition section		1.7×2.1×1.6	400
臂头 Head section		2.0×2.0×1.9	1000

臂架组合方案

Boom / Jib combinations

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru



主臂
Telescopic boom

T : 15.3~80 m

超起主臂 (选装)
Super lifting device + telescopic boom
(optional)

T : 15.3~80 m

固定副臂
Fixed jib


T:15.3~69.9 m+2.5 m
F:6~42 m

臂架组合方案



Boom / Jib combinations

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

ГУТЕХНО

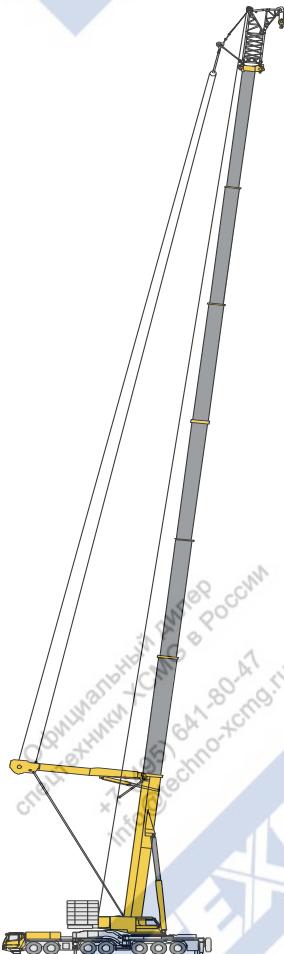

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

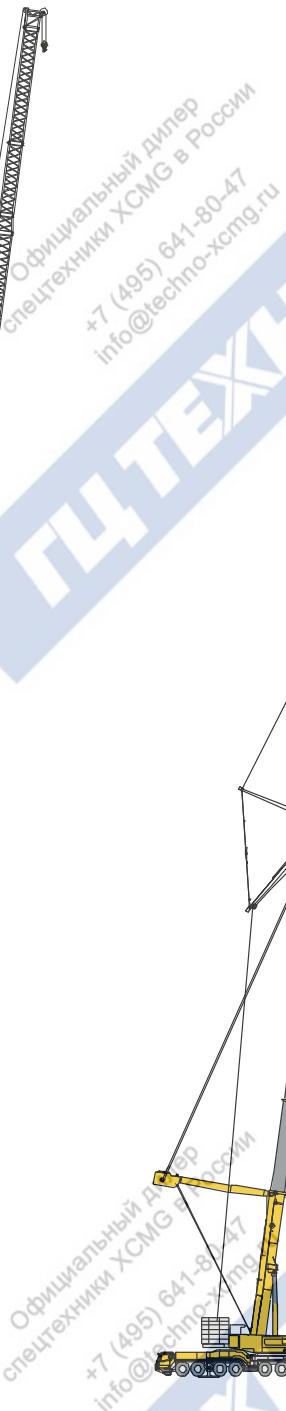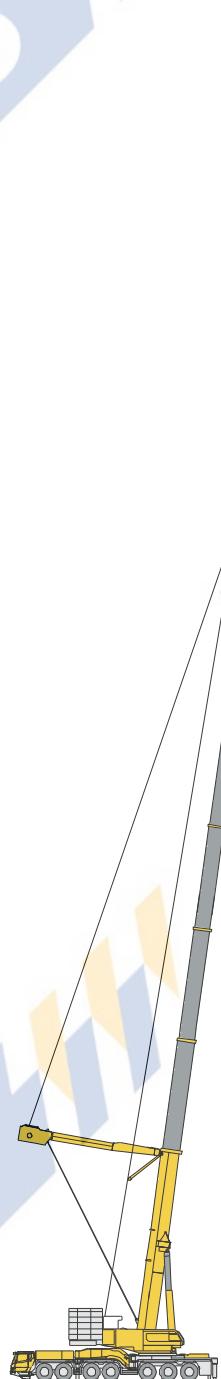

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

超起风电臂 (选装)

Super lifting + wind power arm
(optional)

T : 64.9~76.5m
W : 10m

超起固定副臂 (选装)

Super lifting + device fixed Jib
(optional)

T : 50~69.9 m+ 6 m
F : 6~42 m

超起变幅副臂 (选装)


Super lifting + luffing Jib (optional)

T : 24.5~44.3 m+ 7.5 m
L : 12~84 m

起升高度曲线图

Lifting height chart


主臂
Boom

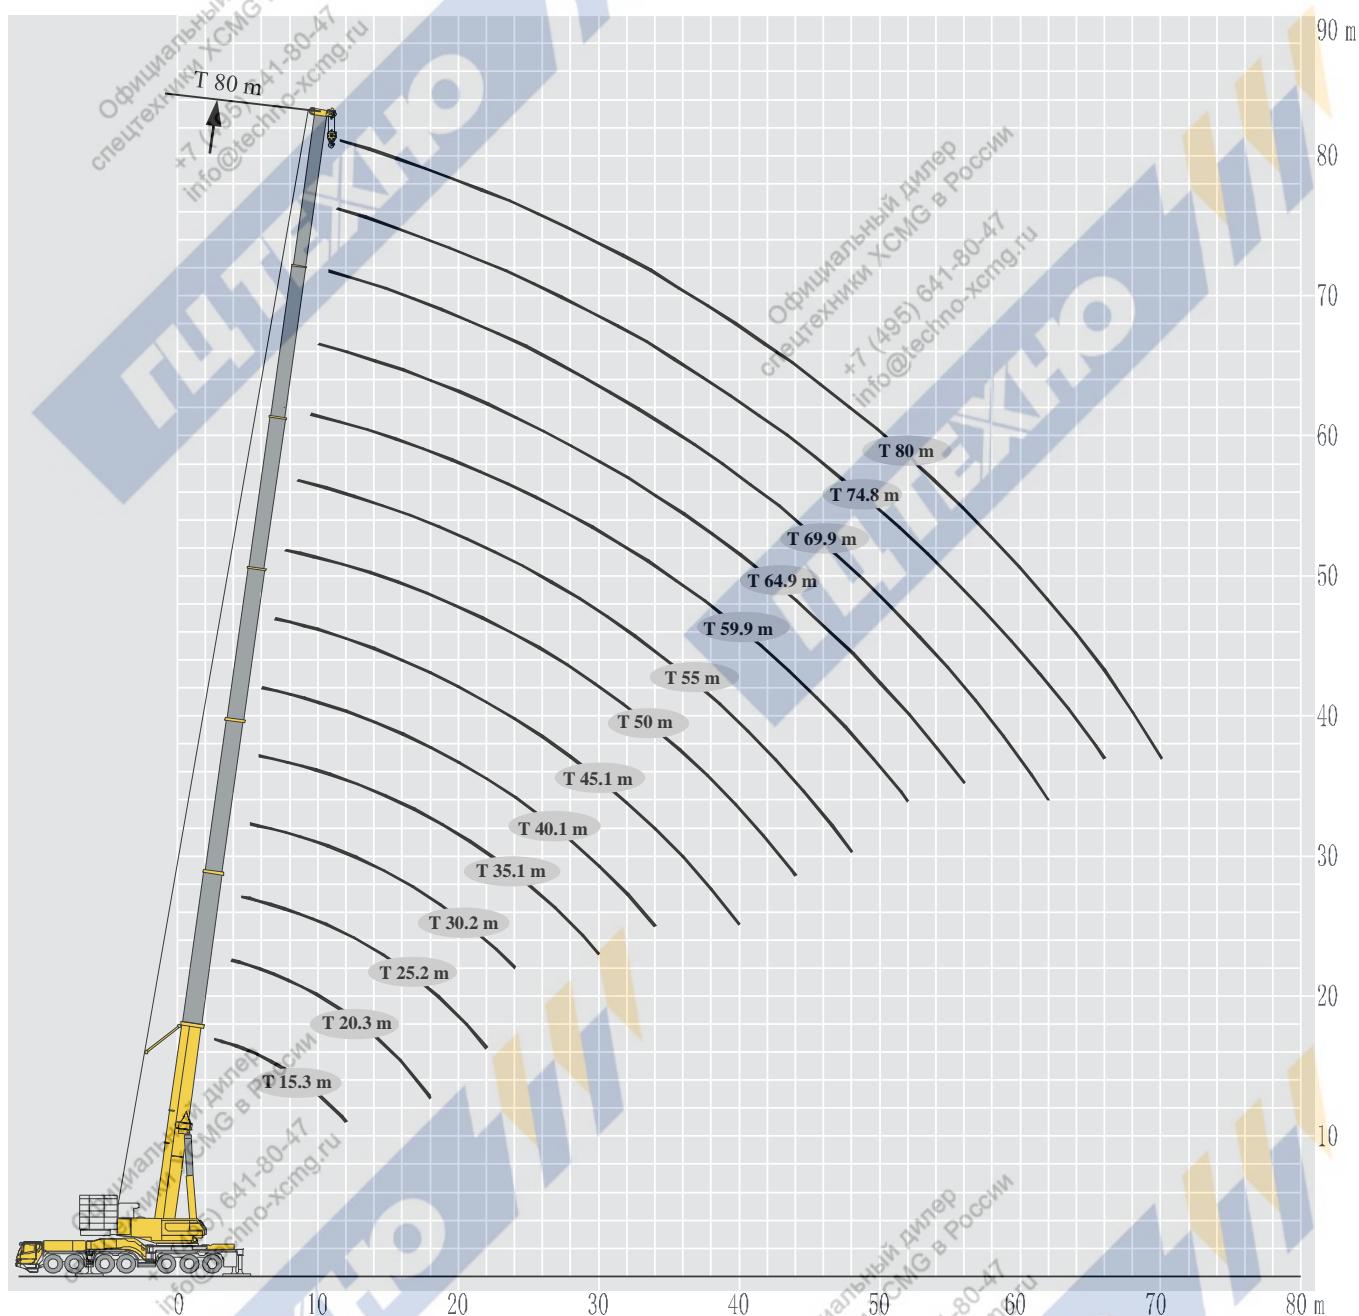

起重性能表


Lifting capacities

T 15.3~50m



	15.3 m	20.3 m	20.3 m	20.3 m	25.2 m	25.2 m	25.2 m	30.2 m	30.2 m	30.2 m	
3	450*										3
3	225.0	225.0	225.0	225.0							3.5
3.5	225.0	225.0	225.0	225.0							4
4	225.0	225.0	225.0	225.0	220.0	220.0	219.0				4.5
4.5	225.0	220.0	220.0	220.0	215.0	215.0	214.0				5
5	220.0	210.0	209.0	209.0	204.0	204.0	203.0	172.3	179.7	196.0	5
6	194.0	192.0	192.0	191.0	184.0	184.0	183.0	153.5	161.2	179.0	6
7	172.0	171.0	170.0	170.0	167.0	167.0	166.0	136.6	145.3	163.0	7
8	154.0	152.0	151.0	150.0	152.0	153.0	152.0	123.4	133.0	149.0	8
9	145.0	141.0	140.0	139.0	138.0	140.0	138.0	112.0	121.7	137.0	9
10	135.0	130.0	129.0	128.0	127.0	130.0	128.0	102.6	112.3	127.0	10
12	106.0	110.0	110.0	110.0	109.0	111.0	109.0	88.3	98.0	110.0	12
14		92.0	91.0	93.0	92.0	93.0	92.0	76.4	86.1	93.0	14
16		80.0	79.0	78.0	85.0	84.0	83.0	66.9	76.5	82.0	16
18		41.7	41.4	40.2	76.0	74.0	73.0	59.3	68.9	64.0	18
20					66.0	64.0	63.0	53.1	62.7	57.0	20
22					48.0	46.0	45.0	47.8	56.0	57.0	22
24								43.5	48.6	49.0	24
26								39.7	40.6	41.5	26
组合code	000000	001000	010000	100000	001100	011000	110000	210000	120000	111000	组合code
倍率	20	20	20	20	20	20	20	16	16	17	倍率
吊钩重量											吊钩重量

4 *表示加特殊装置性能。力限器和显示器统一不做加*性能。




	35.1 m	35.1 m	35.1 m	40.1 m	40.1 m	40.1 m	45.1 m	45.1 m	45.1 m	50 m	
6	160.0	140.0	175.0								6
7	146.0	127.0	160.0	107.9	140.0	110.5					7
8	134.0	115.0	147.0	100.1	125.0	100.8	100.2	92.5	78.6		8
9	123.0	105.0	135.0	92.5	115.0	91.9	92.6	90.0	72.9	81.2	9
10	114.0	96.0	126.0	86.3	105.0	84.8	86.0	83.3	67.5	75.2	10
12	100.0	82.0	109.0	76.0	94.0	73.2	75.4	72.1	58.0	65.2	12
14	89.0	70.0	94.0	68.0	82.0	63.2	67.1	63.5	51.0	57.7	14
16	81.0	62.0	82.0	61.4	74.5	55.5	60.6	56.0	45.5	51.4	16
18	72.0	55.0	72.0	56.1	69.5	49.3	55.1	50.3	40.6	46.5	18
20	65.0	50.0	64.0	51.7	62.5	44.2	50.4	45.3	36.5	42.4	20
22	60.0	44.0	58.0	48.0	53.0	39.7	47.0	40.8	33.1	38.8	22
24	53.0	40.0	51.0	44.9	50.5	36.0	43.5	36.4	30.4	35.2	24
26	47.0	36.0	44.0	42.2	15.2	32.6	40.6	33.3	27.9	32.3	26
28	42.0	33.0	39.5	39.8	40.2	29.9	38.3	30.4	25.8	29.7	28
30	38.0	30.0	35.0	37.4	35.6	27.5	36.3	28.0	23.9	27.4	30
32				33.9	32.5	25.2	32.8	25.8	22.1	25.4	32
34				30.9	28.5	23.2	29.8	23.9	20.6	23.5	34
36							27.1	22.2	19.3	21.8	36
38							24.8	20.5	18.1	20.2	38
40							22.7	19.1	17.1	18.9	40
42										17.7	42
44										16.5	44
组合code	011110	211000	111100	011111	111110	211100	111111	211110	021111	211111	组合code
倍率	16	16	16	12	12	12	9	9	9	7	倍率
吊钩重量										1.9	吊钩重量

起重性能表


Lifting capacities

T 50~80m

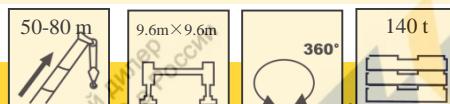

	50 m	50 m	55 m	55 m	55 m	55 m	59.9 m	59.9 m	59.9 m	
	50-80 m	9.6m x 9.6m	360°	140 t						9
9	65.4	65.7								10
10	61.4	62.0	61.8	49.1	55.7	51.0	45.6	47.2	44.4	12
12	54.8	55.8	53.8	44.7	48.3	45.9	40.0	41.7	40.3	14
14	49.4	50.9	47.4	40.6	43.1	41.6	37.2	35.6	36.2	16
16	44.9	46.7	42.0	36.6	38.6	34.0	31.8	33.4	32.6	18
18	41.0	43.0	37.7	33.8	35.0	34.0	31.4	28.8	30.0	20
20	37.6	39.9	34.3	31.5	31.8	29.3	26.2	27.8	27.6	22
22	34.6	37.2	31.3	29.3	29.1	29.3	23.9	25.7	25.5	24
24	32.2	34.6	28.7	27.5	27.0	27.2	22.0	23.7	23.7	26
26	30.1	32.5	26.6	25.7	25.0	25.4	20.2	22.2	22.1	28
28	28.2	30.8	24.6	24.1	23.3	23.6	17.8	14.3	16.0	38
30	26.6	29.2	22.9	22.9	21.8	22.3	18.7	20.6	20.6	30
32	25.0	27.7	21.3	21.7	20.4	21.0	17.5	19.2	19.4	32
34	23.7	26.4	20.0	20.5	19.3	19.8	16.3	18.0	18.4	34
36	22.4	25.2	18.8	19.4	18.3	18.8	15.3	17.0	17.3	36
38	21.1	24.2	17.8	18.5	17.3	17.8	14.3	16.0	16.4	38
40	20.2	23.2	16.9	17.6	16.4	17.0	13.5	15.1	15.6	40
42	19.2	22.2	15.9	16.8	15.7	16.1	12.7	14.3	14.9	42
44	18.2	21.4	15.1	16.1	14.9	15.4	12.0	13.6	14.1	44
46			14.2	15.4	14.2	14.8	11.3	13.0	13.5	46
48			13.2	14.9	13.6	14.2	10.7	12.3	12.8	48
50							10.1	11.8	12.3	50
52							9.6	11.3	11.9	52
组合code	111211	111112	221111	111122	112211	111221	222111	221112	211122	组合code
倍率	7	7	5	5	5	4	4	4	4	倍率
吊钩重量										吊钩重量

1.9

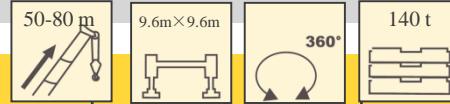

	59.9 m	64.9 m	64.9 m	64.9 m	64.9 m	69.9 m	69.9 m	74.8 m	80 m	
	50-80 m	9.6m x 9.6m	360°	140 t						12
12	37.7									14
14	35.0	34.9	31.6	33.9	32.8					16
16	32.3	31.0	28.5	30.0	29.3	26.1	27.8	23.3	18.6	18
18	29.5	27.8	25.8	26.9	26.2	23.5	24.9	22.6	18.7	20
20	27.1	25.0	23.4	24.1	23.7	21.3	22.4	20.4	18.0	22
22	24.9	22.7	21.5	21.8	21.7	19.5	20.3	18.6	16.7	24
24	23.1	20.8	19.9	20.0	19.9	17.9	18.6	17.1	15.3	26
26	21.5	19.0	18.4	18.3	18.3	16.5	17.1	15.6	14.0	28
28	20.1	17.5	17.1	16.7	17.0	15.3	15.7	14.4	12.8	30
30	18.9	16.2	16.0	15.5	15.8	14.2	14.5	13.4	11.7	32
32	17.8	15.0	14.9	14.4	14.7	13.2	13.5	12.3	10.8	34
34	16.8	14.0	14.2	13.3	13.8	12.3	12.5	11.4	10.1	36
36	16.0	13.1	13.2	12.4	12.9	11.5	11.6	10.7	9.3	38
38	15.2	12.2	12.5	11.4	12.1	10.8	10.8	10.0	8.7	40
40	14.5	11.4	11.8	10.8	11.3	10.2	10.1	9.3	8.2	42
42	13.8	10.6	11.2	10.0	10.7	9.7	9.5	8.8	7.6	44
44	13.2	10.0	10.6	9.4	10.1	9.1	8.9	8.2	7.1	46
46	12.5	9.4	10.1	8.8	9.6	8.6	8.4	7.8	6.6	48
48	12.0	8.9	9.6	8.3	9.1	8.1	7.9	7.3	6.1	50
50	11.5	8.3	9.2	7.8	8.6	7.8	7.4	6.8	5.8	52
52	11.1	7.8	8.8	7.3	8.1	7.3	6.9	6.4	5.5	54
54		7.4	8.4	6.9	7.7	7.0	6.6	6.1	5.0	56
56		7.0	8.1	6.5	7.4	6.6	6.1	5.8	4.8	58
58						6.4	5.8	5.5	4.5	58
60						6.1	5.6	5.1	4.2	60
62						5.8	5.2	4.9	3.9	62
64								4.6	3.7	64
66								4.4	3.5	66
68								3.2	3.0	68
70								3.0	2.0	70
组合code	111222	222211	112222	222220	122221	122222	222221	222222	333333	组合code
倍率	4	3	3	3	3	3	3	3	2	倍率
吊钩重量										吊钩重量

1.3

起重性能表


Lifting capacities

T 15.3~50m



	15.3 m	20.3 m	20.3 m	20.3 m	25.2 m	25.2 m	25.2 m	30.2 m	30.2 m	30.2 m	
3	225.0	225.0	225.0	225.0							3
3.5	225.0	225.0	225.0	225.0							3.5
4	219.6	214.2	214.2	213.3	209.7	208.8	207.9				4
4.5	207.0	202.5	201.6	200.7	198.0	197.1	196.2				4.5
5	195.3	190.8	190.8	189.9	187.2	186.3	185.4	163.2	170.2	181.8	5
6	175.5	171.9	171.9	171.0	169.2	168.3	167.4	145.4	152.7	163.8	6
7	158.4	154.8	154.8	153.9	152.1	151.2	150.3	129.4	137.6	146.7	7
8	141.3	137.7	136.8	135.9	135.0	134.1	133.2	116.9	126.0	130.5	8
9	125.1	123.3	122.4	121.5	121.5	119.7	118.8	106.1	115.3	117.0	9
10	111.6	111.6	110.7	109.8	109.8	108.9	107.1	97.2	105.3	105.3	10
12	89.1	90.0	89.1	88.2	90.9	89.1	88.2	83.7	87.3	88.2	12
14		70.7	69.5	68.0	72.5	70.5	68.3	67.3	68.5	69.4	14
16		56.5	55.4	53.9	58.2	56.3	54.2	53.3	54.4	55.2	16
18		41.7	41.4	40.2	48.0	46.2	44.1	43.2	44.3	45.1	18
20					40.3	38.5	36.5	35.7	36.7	37.5	20
22					34.4	32.6	30.6	29.8	30.8	31.6	22
24								25.0	26.1	26.8	24
26								21.1	22.2	22.9	26
组合code	000000	001000	010000	100000	001100	011000	110000	210000	120000	111000	组合code
倍率	20	20	20	20	20	20	20	15	15	16	倍率
吊钩重量											吊钩重量

4

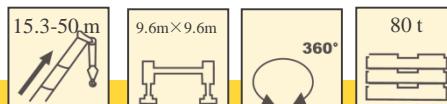

	35.1 m	35.1 m	35.1 m	40.1 m	40.1 m	40.1 m	45.1 m	45.1 m	45.1 m	50 m	
6	152.4	132.9	161.1								6
7	138.9	120.3	144.0	107.9	134.0	110.5					7
8	127.2	108.8	127.8	100.1	122.1	100.8	100.2	92.5	74.5		8
9	116.9	99.0	115.2	92.5	112.5	91.9	92.6	85.2	69.1	77.0	9
10	105.3	90.5	104.4	86.3	102.6	84.8	86.0	78.9	63.9	71.3	10
12	89.1	77.6	87.3	76.0	86.4	73.2	75.4	68.3	55.0	61.8	12
14	73.6	66.8	70.8	68.0	72.4	63.2	67.1	60.1	48.3	54.6	14
16	59.3	54.3	56.6	60.9	58.1	55.5	59.7	53.1	43.1	48.7	16
18	49.1	44.2	46.5	50.6	47.9	45.5	49.4	46.9	38.5	44.1	18
20	41.4	36.6	38.8	42.9	40.2	37.9	41.7	39.2	34.6	40.2	20
22	35.4	30.7	32.9	36.9	34.3	31.9	35.7	33.3	31.4	34.7	22
24	30.6	25.9	28.1	32.0	29.5	27.2	30.9	28.5	28.8	29.9	24
26	26.7	22.1	24.2	28.1	25.6	23.3	26.9	24.6	26.5	25.9	26
28	23.4	18.8	20.9	24.8	22.3	20.0	23.7	21.3	24.1	22.7	28
30	20.6	16.1	18.2	22.0	19.5	17.3	20.9	18.6	21.3	19.9	30
32				19.6	17.1	14.9	18.5	16.2	18.9	17.5	32
34				17.5	15.1	12.9	16.4	14.1	16.9	15.5	34
36							14.6	12.4	15.0	13.6	36
38							13.0	10.8	13.4	12.1	38
40							11.6	9.3	12.0	10.6	40
42										9.4	42
44										8.2	44
组合code	011110	211000	111100	011111	111110	211100	111111	211110	021111	211111	组合code
倍率	13	12	14	9	12	10	9	9	7	7	倍率
吊钩重量				4						1.9	吊钩重量

3

起重性能表

Lifting capacities

T 50~80m

	50-80 m	9.6m×9.6m	360°	80 t						
9	61.9	62.2								9
10	58.2	58.7	58.5	46.5	52.7	48.3				10
12	51.9	52.9	50.9	42.4	45.8	43.5	43.2	44.7	42.0	12
14	46.8	48.2	44.9	38.5	40.8	39.4	37.9	39.5	38.2	14
16	42.5	44.2	39.8	34.7	36.6	35.2	33.7	35.3	34.3	16
18	38.9	40.7	35.7	32.0	33.1	32.2	30.1	31.7	30.9	18
20	35.6	37.8	32.5	29.8	30.1	29.7	27.3	28.9	28.4	20
22	32.7	35.2	29.7	27.8	27.6	27.7	24.8	26.3	26.2	22
24	30.5	32.0	27.2	26.1	25.6	25.8	22.7	24.4	24.2	24
26	27.4	28.1	25.2	24.4	23.7	24.0	20.8	22.4	22.5	26
28	24.1	24.8	22.4	22.9	22.1	22.4	19.1	21.0	20.9	28
30	21.3	22.0	19.6	21.7	20.7	21.1	17.7	19.6	19.5	30
32	19.0	19.6	17.3	20.2	18.9	19.6	16.6	18.2	18.4	32
34	16.9	17.5	15.2	18.1	16.9	17.5	15.3	16.2	17.2	34
36	15.1	15.7	13.4	16.3	15.1	15.7	13.5	14.4	15.3	36
38	13.5	14.1	11.8	14.7	13.5	14.1	11.9	12.8	13.7	38
40	12.0	12.7	10.4	13.3	12.0	12.7	10.5	11.4	12.3	40
42	10.8	11.4	9.1	12.0	10.8	11.4	9.2	10.1	11.0	42
44	9.6	10.2	8.0	10.8	9.6	10.3	8.1	8.9	9.9	44
46			6.9	9.8	8.6	9.2	7.1	7.9	8.9	46
48			6.0	8.8	7.6	8.3	6.1	7.0	7.9	48
50							5.3	6.1	7.1	50
52							4.5	5.3	6.3	52
组合code	111211	111112	221111	111122	112211	111221	222111	221112	211122	组合code
倍率	5	5	5	5	5	4	4	4	4	倍率
吊钩重量					1.9					吊钩重量

	50-80 m	9.6m×9.6m	360°	80 t						
12	35.7									12
14	33.1	33.1	30.0	32.1	31.0					14
16	30.6	29.3	27.0	28.5	27.7	24.7	26.3	22.1	17.6	16
18	27.9	26.3	24.4	25.5	24.8	22.2	23.6	21.4	17.7	18
20	25.7	23.7	22.2	22.8	22.5	20.2	21.2	19.3	17.1	20
22	23.6	21.6	20.3	20.7	20.6	18.5	19.2	17.6	15.8	22
24	21.9	19.7	18.9	18.9	18.8	16.9	17.6	16.2	14.5	24
26	20.4	18.0	17.4	17.3	17.3	15.7	16.2	14.8	13.3	26
28	19.1	16.6	16.2	15.8	16.1	14.5	14.9	13.7	12.1	28
30	17.9	15.4	15.2	14.6	15.0	13.5	13.7	12.7	11.1	30
32	16.8	14.2	14.2	13.6	13.9	12.5	12.8	11.7	10.2	32
34	16.0	13.3	13.4	12.6	13.1	11.6	11.8	10.8	9.5	34
36	15.1	12.4	12.5	11.7	12.2	10.9	11.0	10.1	8.8	36
38	14.4	11.5	11.8	10.8	11.4	10.2	10.2	9.5	8.3	38
40	13.5	10.8	11.2	10.2	10.7	9.7	9.6	8.8	7.8	40
42	12.2	9.7	10.6	9.5	10.1	9.2	9.0	8.4	7.2	42
44	11.1	8.5	10.0	8.3	9.5	8.6	8.4	7.8	6.7	44
46	10.0	7.5	9.6	7.3	8.8	8.1	7.9	7.4	6.2	46
48	9.1	6.6	8.9	6.3	7.9	7.7	7.1	6.9	5.8	48
50	8.2	5.7	8.1	5.5	7.0	7.4	6.3	6.5	5.5	50
52	7.4	4.9	7.3	4.7	6.2	6.9	5.5	6.1	5.2	52
54		4.2	6.6	4.0	5.5	6.2	4.8	5.5	4.8	54
56		3.5	5.9	3.3	4.8	5.5	4.1	4.8	4.6	56
58						4.9	3.5	4.2	4.2	58
60						4.3	2.9	3.6	3.6	60
62						3.8	2.4	3.0	3.1	62
64								2.5	2.6	64
66								2.1	2.1	66
68								1.7	1.7	68
组合code	111222	222211	112222	222220	122221	122222	222221	222222	333333	组合code
倍率	3	3	3	3	3	2	2	2	2	倍率
吊钩重量	1.9				1.3					吊钩重量

起重性能表

Lifting capacities

T 15.3~80m

	15.3-50.m 3	20.3 m 3.5	20.3 m 4	20.3 m 4.5	25.2 m 5	25.2 m 6	25.2 m 7	30.2 m 8	30.2 m 9	30.2 m 10	
	15.3 m 199.8	20.3 m 225.0	20.3 m 174.6	20.3 m 180.9	25.2 m 164.7	25.2 m 134.1	25.2 m 90.6	30.2 m 48.9	30.2 m 34.0	30.2 m 18.2	
3	225.0	225.0	225.0	225.0							
3.5											
4	199.8	192.6	191.7	190.8	187.2	186.3	184.5				
4.5	180.9	174.6	174.6	173.7	170.1	169.2	168.3				
5	164.7	160.2	159.3	158.4	155.7	154.8	153.9	148.5	149.4	149.4	
6	134.1	134.1	133.2	132.3	131.4	129.6	128.7	124.2	124.2	125.1	
7	90.6	91.7	89.8	87.5	94.5	91.4	87.9	86.3	88.2	89.5	
8	64.7	65.7	64.0	62.0	68.1	65.4	62.4	61.0	62.6	63.8	
9	48.9	49.9	48.2	45.4	52.0	49.6	45.9	44.0	46.2	47.8	
10	34.0	35.2	33.3	30.9	38.0	34.8	31.3	29.7	31.6	32.9	
12	18.2	19.2	17.6	15.7	21.5	18.9	16.0	14.7	16.3	17.4	
14		10.9	9.5	7.7	13.0	10.7	8.1	6.9	8.3	9.3	
16		5.9	4.5	2.9	7.8	5.7	3.2	2.1	3.5	4.4	
18		2.4			4.3	2.3					
20					1.8						
组合code	000000	001000	010000	100000	001100	011000	110000	210000	120000	111000	组合code
倍率	20	20	20	20	20	20	20	16	16	17	倍率
吊钩重量											吊钩重量

	15.3-50.m 6	35.1 m 7	35.1 m 8	40.1 m 9	40.1 m 10	40.1 m 12	45.1 m 14	45.1 m 16	45.1 m 18	50 m 20	
	124.2	120.6	122.4	98.9	94.3	90.1					
6	124.2	120.6	122.4								6
7	96.3	87.9	91.8	98.9	94.3	90.1					7
8	69.7	62.3	65.7	71.9	67.9	64.3	70.1	66.4	70.8		8
9	53.5	45.9	49.9	55.5	51.9	48.5	53.9	50.5	54.5	52.4	9
10	39.8	31.3	35.2	42.5	37.8	33.5	40.4	36.0	41.2	38.5	10
12	23.1	16.0	19.3	25.3	21.4	17.9	23.5	19.9	24.2	22.0	12
14	14.4	8.1	11.0	16.3	12.9	9.8	14.8	11.6	15.4	13.4	14
16	9.1	3.3	6.0	10.9	7.7	4.8	9.5	6.5	10.0	8.2	16
18	5.5		2.6	7.2	4.2	1.4	5.9	3.0	6.4	4.6	18
20	2.9			4.6	1.7		3.3		3.8	2.1	20
22				2.6					1.8		22
组合code	011110	211000	111100	011111	111110	211100	111111	211110	021111	211111	组合code
倍率	14	10	10	8	8	8	6	6	6	5	倍率
吊钩重量											吊钩重量

起重性能表

Lifting capacities

T 15.3~80m


	15.3-50 m	9.6m×9.6m	360°	0t						
	50 m	50 m	55 m	55 m	55 m	59.9 m	59.9 m	59.9 m	59.9 m	
9	54.6	55.5								9
10	41.2	42.4	38.0	43.6	41.2	42.5				10
12	24.2	25.2	21.5	26.2	24.2	25.3	21.7	23.1	24.7	12
14	15.4	16.3	13.0	17.2	15.4	16.4	13.2	14.5	15.8	14
16	10.1	10.9	7.8	11.7	10.0	10.9	8.0	9.1	10.4	16
18	6.4	7.2	4.3	8.0	6.4	7.3	4.5	5.6	6.8	18
20	3.8	4.6	1.8	5.3	3.8	4.6	2.0	3.0	4.2	20
22	1.9	2.6		3.3	1.8	2.6			2.2	22
24				1.7						24
组合code	111211	111112	221111	111122	112211	111221	222111	221112	211122	组合code
倍率	5	5	5	5	5	5	4	4	4	倍率
吊钩重量					1.9					吊钩重量

	15.3-50 m	9.6m×9.6m	360°	0t						
	59.9 m	64.9 m	64.9 m	64.9 m	64.9 m	69.9 m	69.9 m	74.8 m	80 m	
12	26.6									12
14	17.5	13.8	17.4	13.5	15.8					14
16	12.0	8.6	11.8	8.3	10.4	11.3	9.4	10.3	10.4	16
18	8.3	5.0	8.1	4.7	6.7	7.6	5.8	6.7	6.8	18
20	5.6	2.5	5.4	2.2	4.1	5.0	3.2	4.1	4.1	20
22	3.6		3.4		2.1	2.9		2.1	2.2	22
24	2.0		1.8			1.4				24
组合code	111222	222211	112222	222220	122221	122222	222221	222222	333333	组合code
倍率	4	4	4	4	4	2	2	2	2	倍率
吊钩重量			1.9					1.3		吊钩重量

起升高度曲线图

Lifting height chart

主臂+超起
Boom+ Super lifting device

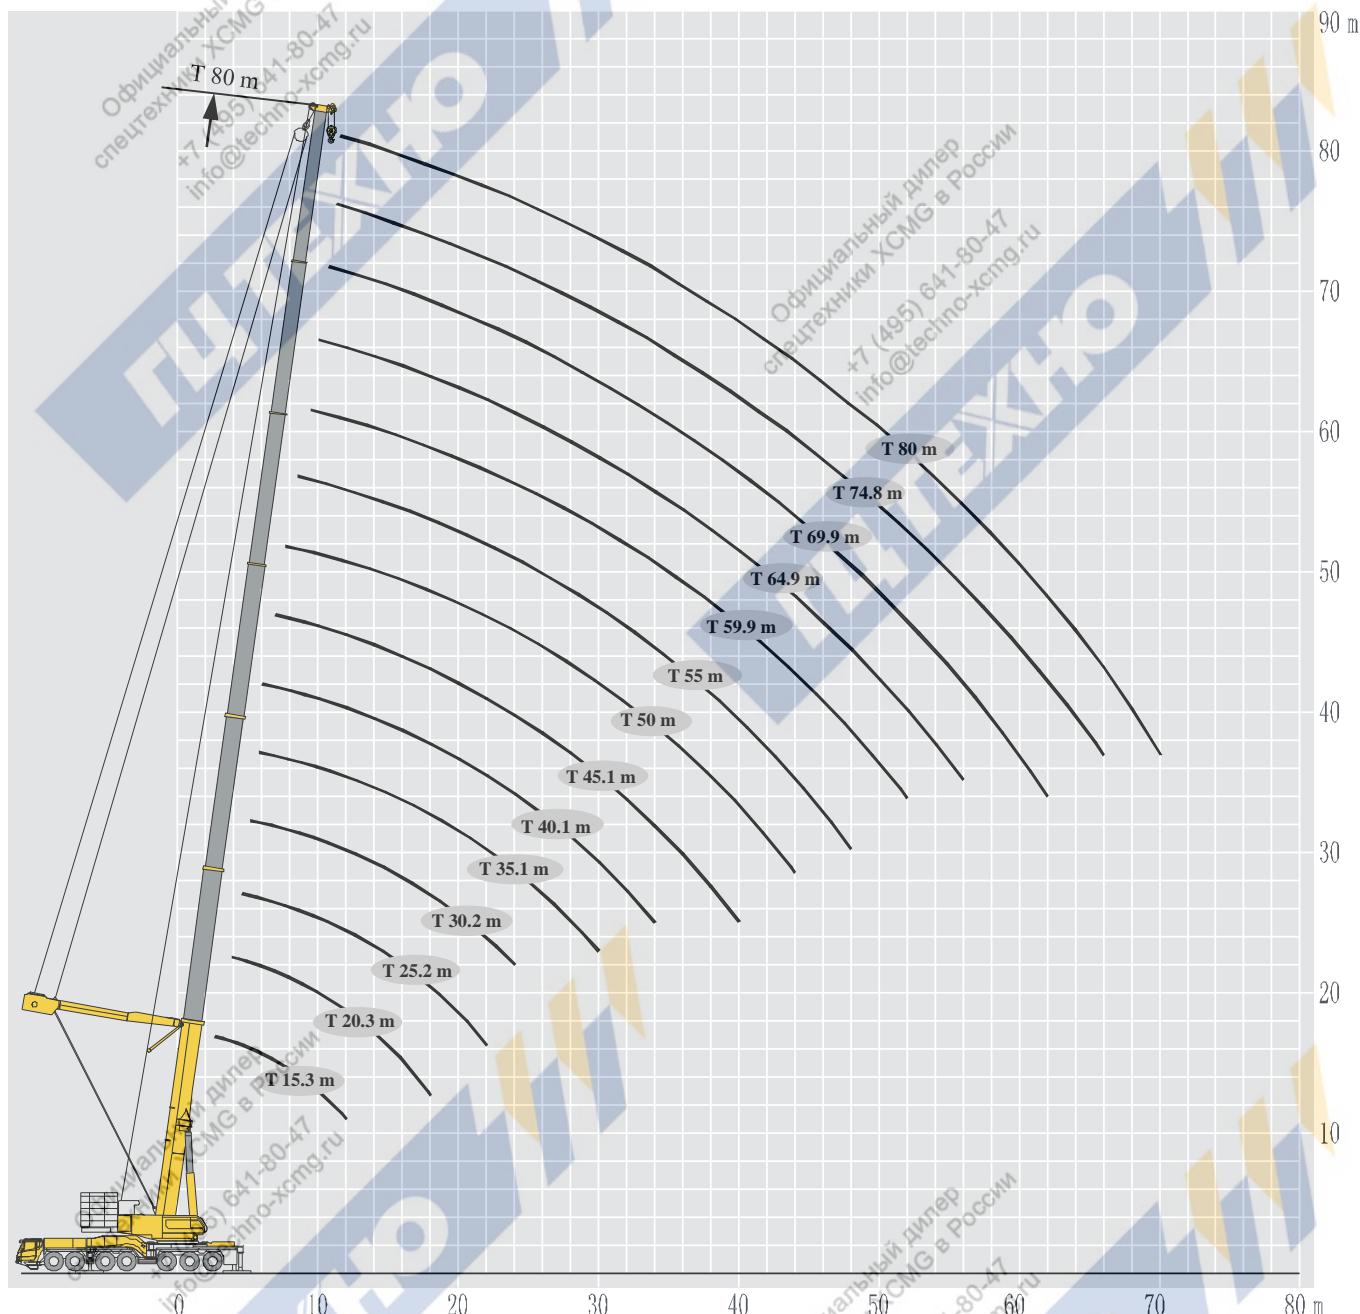

起重性能表

Lifting capacities

T 35.1~55m



	35.1 m	35.1 m	40.1 m	40.1 m	40.1 m	45.1 m	45.1 m	45.1 m	50 m	50 m	50 m	55 m	55 m	55 m				
5	176.0	175.1													5			
6	159.0	158.1	156.4	155.6	153.9										6			
7	144.5	143.7	142.0	141.1	140.3	139.4	139.4	138.6							7			
8	131.8	130.9	130.9	129.2	128.4	128.4	127.5	126.7	107.7	105.5	106.3				8			
9	121.6	120.7	120.7	119.0	118.2	118.2	118.2	116.5	99.5	98.2	99.0	91.9	88.6	89.2	9			
10	112.2	111.4	111.4	110.5	108.8	109.7	109.7	108.0	92.9	92.3	93.1	86.0	83.5	84.2	10			
12	97.8	96.1	96.9	95.2	94.4	95.2	95.2	93.5	82.1	81.4	82.7	75.7	74.4	74.4	12			
14	85.0	83.3	84.2	83.3	81.6	83.3	82.5	81.6	72.8	72.6	74.1	67.3	67.0	66.6	14			
16	74.8	73.1	74.8	73.1	72.3	73.1	73.1	71.4	65.4	65.7	67.1	60.7	60.7	59.9	16			
18	66.3	64.6	66.3	65.5	63.8	65.5	65.5	63.8	59.2	59.6	61.1	55.1	55.6	54.4	18			
20	59.5	57.8	60.4	58.7	57.0	58.7	58.7	57.0	54.0	54.5	56.0	50.2	51.1	49.8	20			
22	53.6	51.9	54.4	52.7	51.0	53.6	52.7	51.9	49.6	50.1	51.8	45.9	47.0	45.7	22			
24	48.5	46.8	49.3	47.6	45.9	48.5	48.5	46.8	45.7	46.3	47.9	42.2	43.6	42.2	24			
26	43.7	42.0	45.1	43.4	41.7	44.2	44.2	42.5	42.3	43.0	44.2	38.9	40.6	39.2	26			
28	37.2	35.5	40.8	39.1	37.4	40.0	40.0	38.3	39.1	40.0	40.0	36.0	37.9	36.3	28			
30	33.0	32.4	37.4	35.7	34.0	36.6	36.6	34.0	35.7	36.6	37.4	33.0	35.6	33.4	30			
32				32.6	27.7	23.6	33.2	31.5	32.3	33.2	33.2	30.1	32.9	30.8	32			
34					30.2	28.7	27.2	30.6	28.9	29.8	30.6	30.6	28.1	30.6	29.0	34		
36							27.3	25.7	27.8	27.2	28.1	28.9	26.4	28.9	27.2	36		
38								24.3	22.6	24.9	25.0	26.3	26.4	24.7	26.4	25.5	38	
40									19.2	17.5	19.3	22.6	23.9	25.8	22.7	24.7	23.8	40
42											20.7	21.9	22.3	20.5	23.0	22.1	42	
44												16.6	17.8	19.3	18.6	21.3	20.1	44
46														16.8	20.2	19.3	46	
48															14.6	17.0	16.1	48
组合 code	011110	111100	011111	111110	211100	111111	211110	021111	211111	111211	111112	221111	111122	112211	组合 code			
倍率	17	17	15	15	15	12	12	12	10	10	10	8	8	8	倍率			
吊钩重量															吊钩重量			

3

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

起重性能表

Lifting capacities

T 55~80m

	55-80m	9.6m×9.6m	360°	160 t	SL								
9	88.4												9
10	83.4	79.4	80.4	78.4	76.3								10
12	74.1	70.1	71.2	70.2	68.4	65.1	63.8	64.6	64.7				12
14	66.4	62.8	63.9	63.1	61.7	58.5	57.7	58.0	58.2	54.0	54.4	50.8	14
16	60.0	56.5	57.6	57.2	56.1	53.1	52.3	52.1	52.8	49.0	49.3	46.4	42.1
18	54.6	51.5	52.7	52.2	51.2	48.1	47.8	47.5	48.3	45.2	45.1	42.5	39.3
20	50.1	46.8	48.2	47.8	46.9	44.3	44.0	43.7	44.1	41.4	41.6	39.2	35.6
22	46.2	43.0	44.2	44.1	43.5	40.5	40.7	39.9	40.7	38.3	38.2	36.4	31.4
24	42.8	39.3	40.8	40.8	40.2	37.5	37.7	36.8	37.6	35.6	35.2	32.5	29.4
26	39.7	36.4	37.9	37.9	37.3	34.5	35.0	32.5	34.8	31.4	31.3	29.6	27.6
28	37.1	33.6	35.0	35.1	34.5	30.6	31.3	30.1	31.0	29.4	29.0	29.6	25.9
30	34.1	30.2	31.5	31.9	31.5	28.5	29.4	28.0	29.1	27.7	27.3	27.8	24.3
32	31.5	28.1	29.5	29.9	29.6	26.8	27.7	26.3	27.4	26.0	25.5	26.1	22.9
34	29.7	26.4	27.8	28.3	28.0	25.1	26.1	24.6	25.7	24.5	23.8	24.5	21.6
36	28.0	24.7	26.2	26.7	26.5	23.6	24.8	23.1	24.2	23.2	22.5	23.2	20.4
38	26.4	23.3	24.8	25.3	25.1	22.3	23.5	21.8	22.9	21.9	21.2	21.9	19.3
40	24.7	22.0	23.4	23.8	23.8	21.0	22.2	20.5	21.6	20.8	20.1	20.7	18.3
42	22.7	20.8	21.7	22.1	22.6	19.9	21.1	19.4	20.6	19.7	19.0	19.7	17.4
44	20.8	18.9	19.7	20.6	21.7	18.8	20.1	18.3	19.5	18.8	17.9	18.6	16.6
46	19.8	17.2	18.0	18.9	20.0	17.8	19.2	17.3	18.4	17.8	17.1	17.7	15.7
48	16.6	15.6	16.4	17.3	18.4	16.2	18.3	16.0	17.4	16.9	16.2	16.8	14.9
50		14.1	14.9	15.8	16.9	14.7	17.0	14.5	16.0	16.2	15.3	15.9	14.2
52		13.1	13.8	14.6	15.5	13.4	15.6	13.2	14.6	15.4	14.1	15.2	13.5
54						12.1	14.4	11.9	13.4	14.2	12.8	14.4	12.8
56						11.0	13.9	10.8	12.2	13.0	11.7	13.6	12.3
58										12.0	10.6	12.4	11.5
60										11.0	9.6	11.4	10.5
62										10.3	9.0	10.4	9.6
64											9.5	8.8	6.4
66											8.6	8.0	6.6
68											7.8	7.2	6.8
70												6.5	7.0
组合 code	111221	222111	221112	211122	111222	222211	112222	222220	122221	122222	222221	222222	333333
倍率	8	7	7	7	7	6	6	6	6	5	5	4	2
吊钩重量	3												1.3

起重性能表

Lifting capacities

T 35.1~55m

	35.1~55 m	35.1 m	35.1 m	40.1 m	40.1 m	40.1 m	45.1 m	45.1 m	45.1 m	50 m	50 m	50 m	55 m	55 m	55 m	55 m	
5	167.5	166.6															5
6	150.5	148.8	147.9	147.1	145.4												6
7	135.2	133.5	133.5	131.8	130.9	127.0	128.0	126.0									7
8	122.4	120.7	120.7	119.9	118.2	116.0	118.2	115.6	106.3	105.5	107.7						8
9	111.4	110.5	110.5	108.8	108.0	107.8	108.0	106.8	99.0	98.2	99.5	88.6	88.4	89.2			9
10	101.2	99.5	100.3	98.6	97.8	98.6	97.8	96.9	93.1	92.3	92.9	83.5	83.4	84.2			10
12	84.2	82.5	84.2	82.5	80.8	82.5	81.6	80.8	81.6	80.8	79.9	74.4	74.1	74.4			12
14	70.6	68.9	70.6	68.9	67.2	69.7	68.9	67.2	68.9	68.0	67.2	67.0	66.4	66.6			14
16	60.3	57.8	60.4	58.7	57.0	59.5	59.5	57.8	58.7	58.7	57.8	58.7	58.7	57.8			16
18	49.2	46.7	51.3	48.8	46.4	51.1	50.6	48.3	51.0	51.0	50.0	51.0	51.0	50.2			18
20	40.7	38.3	42.9	40.4	38.1	42.7	42.2	39.9	43.7	43.0	41.6	44.5	44.0	43.3			20
22	34.2	31.8	36.3	33.8	31.6	36.1	35.7	33.4	37.1	36.5	35.0	38.0	37.4	36.7			22
24	28.9	26.5	31.0	28.6	26.4	30.8	30.4	28.2	31.8	31.2	29.8	32.7	32.1	31.4			24
26	24.5	22.2	26.6	24.2	22.1	26.5	26.1	23.9	27.5	26.9	25.5	28.4	27.8	27.1			26
28	20.8	18.5	23.0	20.6	18.5	22.9	22.5	20.3	23.9	23.3	21.9	24.7	24.2	23.5			28
30	17.7	15.4	19.9	17.5	15.4	19.8	19.4	17.2	20.8	20.2	18.9	21.7	21.1	20.5			30
32			17.2	14.9	12.8	17.2	16.8	14.6	18.2	17.6	16.2	19.0	18.5	17.9			32
34			14.8	12.5	10.4	14.9	14.5	12.3	15.9	15.3	13.9	16.7	16.2	15.6			34
36						12.8	12.4	10.3	13.9	13.3	11.9	14.7	14.2	13.6			36
38						11.0	10.6	8.5	12.1	11.5	10.2	13.0	12.4	11.8			38
40						9.4	9.0	6.8	10.5	9.9	8.6	11.4	10.9	10.2			40
42										9.0	8.5	7.1	9.9	9.4			42
44										7.7	7.1	5.8	8.7	8.1			44
46													7.5	7.0			46
48													6.4	5.9			48
组合 code	011110	111100	011111	111110	211100	021111	111111	211110	111112	111211	211111	111122	111221	112211			组合 code
倍率 吊钩 重量	15	15	13	13	13	10	10	10	8	8	8	7	7	7			倍率 吊钩 重量
						3									1.9		

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

起重性能表

Lifting capacities

T 55~80m

	55-80 m	9.6m × 9.6m	360°	80 t	SL								
	55 m	59.9 m	59.9 m	59.9 m	59.9 m	64.9 m	64.9 m	64.9 m	64.9 m	69.9 m	69.9 m	74.8 m	80 m
9	91.9												9
10	86.0	76.3	78.4	80.4	79.4								10
12	75.7	68.4	70.2	71.2	70.1	63.8	64.7	65.1	64.6				12
14	66.3	61.7	63.1	63.9	62.8	57.7	58.2	58.5	58.0	54.0	54.4	50.8	44.8
16	57.0	56.1	57.0	56.1	56.1	52.3	52.8	53.1	52.1	49.0	49.3	46.4	42.1
18	49.3	51.0	50.2	49.3	48.5	47.8	48.3	48.1	47.5	45.2	45.1	42.5	39.3
20	41.5	44.9	43.7	42.7	41.8	44.0	43.4	42.4	42.2	41.4	41.6	39.2	35.6
22	35.0	38.4	37.2	36.2	35.3	38.3	37.2	35.9	35.6	38.0	36.5	36.4	31.4
24	29.8	33.1	31.9	30.9	30.1	33.1	32.0	30.6	30.4	32.7	31.3	32.0	29.4
26	25.5	28.8	27.6	26.6	25.8	28.8	27.7	26.3	26.1	28.4	27.0	27.7	27.6
28	21.9	25.1	24.0	23.1	22.2	25.1	24.1	22.8	22.5	24.8	23.4	24.2	24.2
30	18.9	22.1	20.9	20.0	19.2	22.1	21.0	19.7	19.5	21.8	20.4	21.1	21.2
32	16.3	19.5	18.3	17.4	16.6	19.5	18.4	17.1	16.9	19.2	17.8	18.5	18.6
34	14.0	17.2	16.0	15.1	14.3	17.2	16.1	14.9	14.6	16.9	15.5	16.2	16.3
36	12.0	15.2	14.1	13.1	12.3	15.2	14.1	12.9	12.7	14.9	13.5	14.3	14.4
38	10.2	13.4	12.3	11.4	10.6	13.4	12.4	11.1	10.9	13.1	11.8	12.5	12.6
40	8.7	11.8	10.7	9.8	9.0	11.9	10.8	9.6	9.4	11.6	10.2	11.0	11.0
42	7.2	10.4	9.3	8.4	7.6	10.4	9.4	8.2	8.0	10.2	8.8	9.6	9.7
44	6.0	9.1	8.0	7.1	6.3	9.2	8.1	6.9	6.7	8.9	7.6	8.3	8.4
46	4.8	8.0	6.9	6.0	5.2	8.0	7.0	5.8	5.5	7.8	6.4	7.2	7.3
48	3.7	6.9	5.8	4.9	4.1	7.0	5.9	4.7	4.5	6.7	5.4	6.1	6.2
50		5.9	4.8	3.9	3.2	6.0	5.0	3.7	3.5	5.8	4.4	5.2	5.3
52		5.0	3.9	3.0	2.3	5.1	4.1	2.9	2.7	4.9	3.6	4.3	4.4
54						4.3	3.3	2.0	1.8	4.1	2.7	3.5	3.6
56						3.5	2.5	1.3	1.1	3.3	2.0	2.7	2.9
58										2.6	1.3	2.0	2.2
60										2.0		1.4	1.5
62										1.3			62
组合 code	221111	111222	211122	221112	222111	112222	122221	222211	222220	122222	222221	222222	333333
倍率	7	6	6	6	6	5	5	5	5	4	4	4	倍率
吊钩重量													吊钩重量

1.9

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

起重性能表

Lifting capacities

T 35.1~80m

	35.1~55 m	9.6m×9.6m	360°	0t	SL					
	35.1 m	35.1 m	40.1 m	40.1 m	40.1 m	45.1 m	45.1 m	45.1 m	50 m	
5	146.2	144.5								5
6	121.6	119.9	119.9	118.2	116.5					6
7	103.7	102.0	102.0	100.3	98.6	99.5	98.6	97.8		7
8	89.3	86.0	88.4	86.7	85.0	85.9	85.9	84.2		8
9	68.7	65.3	71.4	67.9	64.8	71.0	70.4	67.1		9
10	54.5	51.1	57.1	53.9	50.5	56.7	56.1	53.1		10
12	32.2	28.6	35.2	31.5	28.2	34.8	34.1	30.7		12
14	20.1	16.9	22.8	19.5	16.6	22.5	21.9	18.8		14
16	12.7	9.7	15.2	12.2	9.4	14.9	14.4	11.5		16
18	7.6	4.8	10.0	7.2	4.6	9.8	9.3	6.6		18
20	4.0	1.3	6.3	3.6	1.1	6.1	5.6	3.0		20
22	1.2	0.0	3.5			3.3	2.8			22
24			1.3			1.1				24
组合 code	011110	111100	011111	111110	211100	021111	111111	211110	111112	组合 code
倍率	13	13	10	10	10	9	9	9	7	倍率
吊钩重量									1.9	吊钩重量

3

	35.1~55 m	9.6m×9.6m	360°	0t	SL					
	50 m	50 m	55 m	55 m	55 m	55 m	59.9 m	59.9 m	59.9 m	
8	84.2	83.3								8
9	71.3	69.3	73.3	72.5	71.5	69.2				9
10	57.1	55.2	58.9	58.2	57.3	55.0	59.4	57.8	56.5	10
12	35.2	33.1	37.3	36.5	35.5	32.9	37.9	36.1	34.6	12
14	22.9	21.0	24.8	24.1	23.1	20.9	25.3	23.7	22.4	14
16	15.3	13.5	17.1	16.4	15.6	13.5	17.6	16.1	14.9	16
18	10.2	8.5	11.9	11.3	10.5	8.5	12.4	11.0	9.8	18
20	6.5	4.9	8.2	7.5	6.8	4.9	8.6	7.3	6.2	20
22	3.7	2.1	5.3	4.7	4.0	2.1	5.8	4.5	3.4	22
24	1.5		3.1	2.5	1.8		3.5	2.3	1.2	24
26			1.3			1.7				26
组合 code	111211	211111	111122	111221	112211	221111	111222	211122	221112	组合 code
倍率	7	7	6	6	6	6	5	5	5	倍率
吊钩重量										吊钩重量

3


	35.1~55 m	9.6m×9.6m	360°	0t	SL					
	59.9 m	64.9 m	64.9 m	64.9 m	64.9 m	69.9 m	69.9 m	74.8 m	80 m	
10	55.3									10
12	33.3	37.8	36.1	34.0	33.7					12
14	21.2	25.2	23.7	21.9	21.6	24.7	22.8	23.7	23.8	14
16	13.8	17.5	16.1	14.5	14.2	17.1	15.3	16.2	16.2	16
18	8.8	12.3	11.0	9.4	9.2	11.9	10.2	11.1	11.1	18
20	5.2	8.6	7.3	5.8	5.5	8.2	6.5	7.4	7.4	20
22	2.4	5.7	4.5	3.0	2.8	5.4	3.8	4.6	4.7	22
24		3.5	2.3	0.9		3.2	1.6	2.4	2.5	24
26		1.7			1.4					26
组合 code	222111	112222	122221	222211	222220	122222	222221	222222	333333	组合 code
倍率	5	3	3	3	3	2	2	2	2	倍率
吊钩重量		1.9								吊钩重量

1.3

起升高度曲线图

Lifting height chart

主臂+风电臂
Boom + Wind power arm

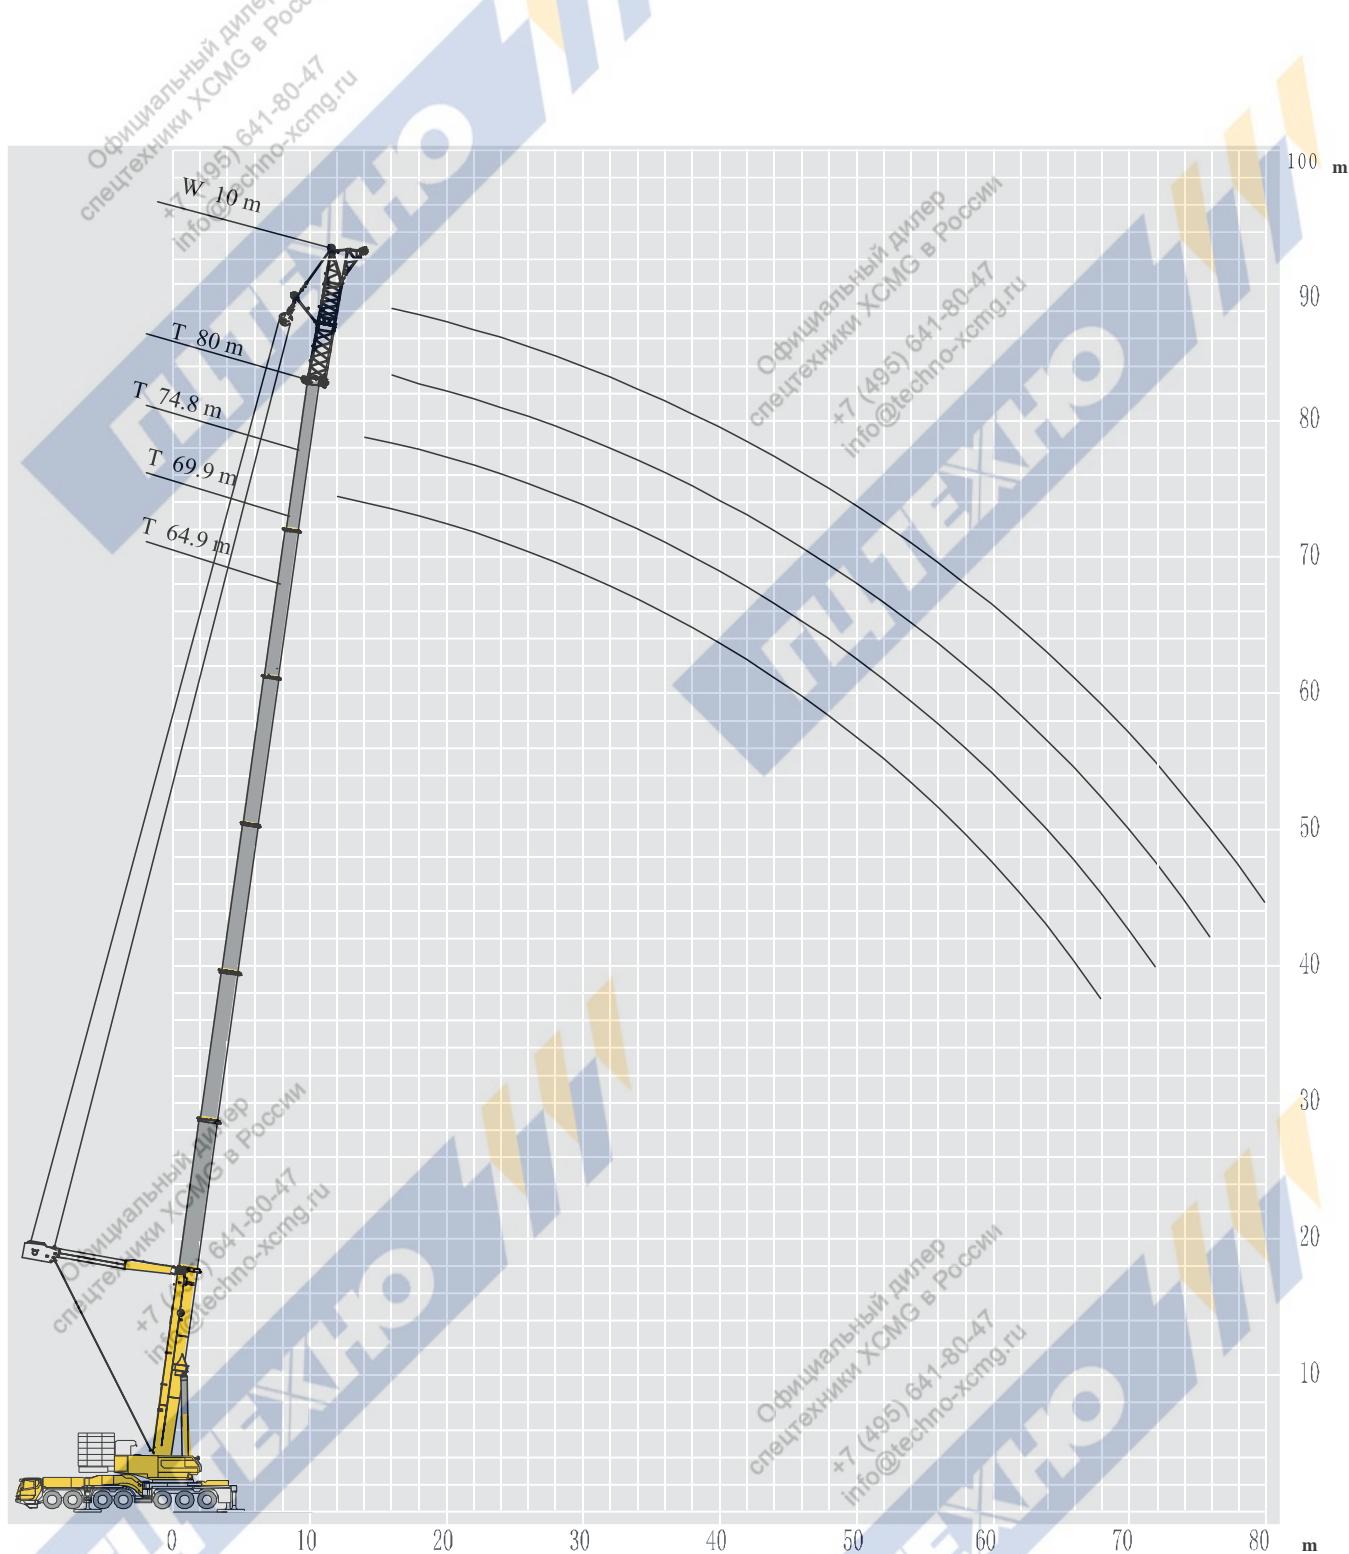

起重性能表

Lifting capacities

T 64.9~76.5m

	64.9m	69.9m	74.8m	76.5m	64.9m	69.9m	74.8m	76.5m	10
10					50.0				
12	60.0				48.0	45.0			12
14	56.0	51.8			45.0	42.0	40.0		14
16	52.0	48.4	44.2	43.0	42.0	40.0	38.0	36.5	16
18	47.0	45.0	41.7	40.0	39.4	38.5	33.0	32.0	18
20	41.5	40.5	39.6	35.0	33.3	30.4	28.5	26.6	20
22	35.0	32.0	30.0	28.0	26.9	26.8	25.7	24.5	22
24	28.6	28.2	27.0	25.8	23.4	23.0	23.3	22.8	24
26	24.6	24.0	24.5	22.1	20.7	20.2	20.7	20.7	26
28	21.6	21.1	21.6	19.3	18.2	17.8	18.1	18.0	28
30	19.1	18.6	18.9	16.8	16.2	15.8	15.8	15.4	30
32	16.9	16.5	16.5	14.5	14.4	14.0	13.9	12.9	32
34	15.0	14.6	14.3	12.8	12.8	12.4	11.8	10.7	34
36	13.4	13.0	12.3	11.1	11.4	11.0	10.3	9.0	36
38	11.9	11.2	10.8	9.4	10.1	9.8	9.0	7.8	38
40	10.6	10.2	9.4	8.1	9.0	8.7	8.2	7.3	40
42	9.4	9.1	8.5	7.7	8.0	7.7	7.4	6.7	42
44	8.4	8.1	7.7	7.0	7.1	6.8	6.6	6.0	44
46	7.4	7.1	6.9	6.2	7.1	6.8	6.6	6.0	46
48	6.6	6.3	6.0	5.6	6.3	6.0	5.8	5.4	48
50	5.8	5.5	5.5	5.1	5.5	5.3	5.3	4.9	50
52	5.0	4.8	4.9	4.8	4.8	4.6	4.7	4.6	52
54	4.4	4.1	4.2	4.1	4.2	4.0	4.0	3.9	54
56	3.7	3.5	3.5	3.4	3.6	3.4	3.4	3.3	56
58	3.1	3.0	2.9	2.8	3.0	2.9	2.8	2.7	58
60	2.6	2.5	2.5	2.4	2.5	2.4	2.3	2.2	60
组合 code	222211	222221	222222	332222	222211	222221	222222	332222	组合 code
倍率	5	5	4	4	5	4	4	4	倍率
吊钩重量				1.9					吊钩重量

起重性能表

Lifting capacities


T 64.9~76.5m

	64.9m	69.9m	74.8m	76.5m	64.9m	69.9m	74.8m	76.5m	
10									10
12									12
14	55.0				46.0				14
16	51.0	50.0	38.0	33.0	43.0	40.0	35.0	31.0	16
18	47.0	45.0	34.0	28.0	42.5	39.0	32.0	27.0	18
20	41.5	40.0	30.0	26.0	39.0	35.0	28.5	24.0	20
22	34.0	32.0	26.0	25.0	32.0	30.4	24.7	22.0	22
24	29.3	26.5	24.2	23.8	27.0	25.2	23.0	22.6	24
26	25.2	24.4	22.9	22.6	23.4	23.4	21.2	21.6	26
28	22.2	21.5	21.6	19.6	20.6	19.8	18.6	20.1	28
30	19.6	19.0	18.8	16.8	18.0	17.5	16.1	18.0	30
32	17.4	16.9	16.7	15.0	15.5	15.1	14.2	15.0	32
34	15.6	15.0	14.9	13.6	14.3	13.5	12.9	12.0	34
36	13.9	13.4	13.0	12.4	12.5	12.0	11.8	10.3	36
38	12.4	11.9	11.3	11.0	11.5	11.0	10.7	8.7	38
40	11.1	10.7	10.6	10.0	10.0	9.5	10.1	7.6	40
42	10.0	9.5	9.3	9.1	9.0	8.5	8.0	7.1	42
44	8.9	8.5	8.4	8.1	8.0	7.5	7.2	6.6	44
46	8.0	7.5	7.5	6.8	7.0	6.5	6.5	5.9	46
48	7.1	6.7	6.4	5.4	6.0	6.0	5.5	5.2	48
50	6.3	5.9	5.6	4.5	6.0	5.0	5.3	4.3	50
52	5.6	5.2	4.9	4.2	4.5	4.5	4.7	4.0	52
54	4.9	4.5	4.3	3.8	4.0	3.5	4.1	3.6	54
56	4.3	3.9	3.8	3.4	3.5	3.1	3.7	3.3	56
58	3.7	3.4	3.3	3.0	3.0	2.9	3.2	2.5	58
60	3.1	2.9	2.8	2.6	2.8	2.5	2.8	2.2	60
62					2.4	2.2	2.2	2.1	62
组合 code	222211	222221	222222	332222	222211	222221	222222	332222	组合 code
倍率	5	4	3	3	4	4	3	3	倍率
吊钩重量				1.9					吊钩重量

起升高度曲线图

Lifting height chart

固定副臂
Fixed Jib

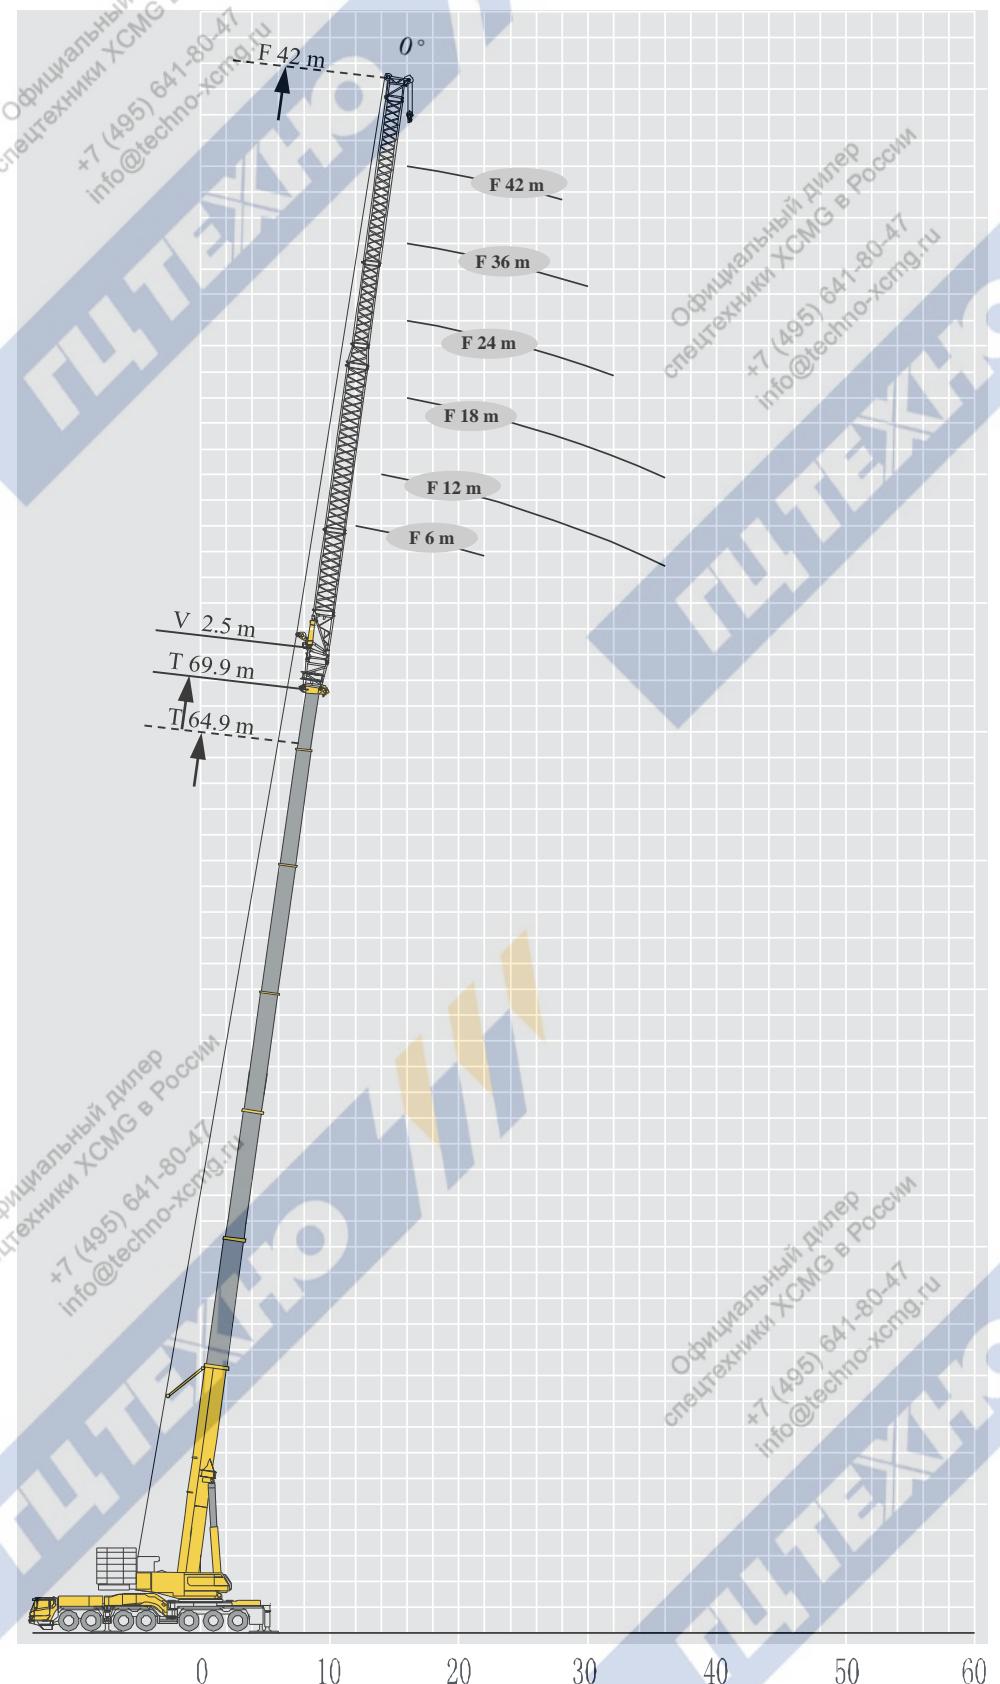

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m 9.6m×9.6m 360° 140t 6m 0°	15.3+2.5 m 6 m	50+2.5 m 6 m	55+2.5 m 6 m	59.9+2.5 m 6 m	64.9+2.5 m 6 m	69.9+2.5 m 6 m	
3								3
3.5	74.9							3.5
4	73.9							4
4.5	71.3							4.5
5	67.1							5
6	60.0							6
7	53.5							7
8	48.7							8
9	44.5							9
10	40.6	21.6						10
11	37.9	19.9	17.2					11
12	35.2	18.9	15.5	12.4				12
13	32.7	17.3	14.1	11.1	9.7			13
14	30.7	15.9	12.8	10.3	8.6	6.4		14
16	27.7	13.4	10.8	9.1	6.7	4.7		16
18	24.7	11.6	10.0	7.5	5.2	3.6		18
20	22.2	10.1	8.5	6.1	4.1	2.6		20
22		9.6	7.1	4.9	3.1	1.7		22
24		8.5	6.0	3.9	2.3			24
26		7.3	5.1	3.1	1.6			26
28		6.3	4.2	2.4				28
30		5.5	3.5	1.8				30
32		4.9	2.9					32
34		4.2	2.4					34
36		3.6	1.9					36
38		3.2	1.5					38
40		2.7						40
42		2.3						42
44		2.0						44
46		1.6						46
组合 code	000000	211111	221111	222111	222211	222221		组合 code
倍率	6	2	2	2	1	1		倍率
吊钩重量	1.9			1.3				吊钩重量

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m	9.6m×9.6m	360°	140t	12m	0°	
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m	
4	12 m						4
4.5	64.6						4.5
5	61.8						5
6	56.8						6
7	52.4						7
8	49.0						8
9	45.7						9
10	42.4						10
11	39.6						11
12	37.5	27.6					12
13	35.2	26.4					13
14	33.0	25.3	24.4				14
16	29.7	23.4	21.3	17.9			16
18	26.8	21.8	18.6	15.5	13.2	11.6	18
20	24.2	20.1	16.4	13.5	11.4	9.8	20
22	22.2	17.9	14.3	11.7	9.8	8.4	22
24	20.5	16.0	12.6	10.2	8.5	7.2	24
26	19.2	14.5	11.2	9.0	7.4	6.2	26
28		12.9	10.1	7.8	6.3	5.3	28
30		11.7	9.0	6.9	5.5	4.5	30
32		10.5	8.0	6.0	4.6	3.8	32
34		9.6	7.0	5.2	3.9	3.1	34
36		8.7	6.1	4.4	3.3	2.5	36
38		7.9	5.4	3.7	2.6	1.9	38
40		7.1	4.8	3.1	2.1		40
42		6.4	4.2	2.6	1.7		42
44		5.8	3.6	2.1			44
46		5.2	3.1	1.7			46
48		4.7	2.6	1.1			48
50		4.2	2.1				50
52		3.7	1.7				52
54		3.3	1.3				54
56		2.9	1.0				56
组合 code	000000	211111	221111	222111	222211	222221	组合 code
倍率	6	3	2	2	2	2	倍率
吊钩重量	1.9			1.3			吊钩重量

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m 9.6m×9.6m	360°	140t	18m	0°	
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m
5	18 m	18 m	18 m	18 m	18 m	18 m
6	45.5					
7	42.0					
8	39.0					
9	35.9					
10	33.0					
11	30.6					
12	29.1					
13	27.2	21.6				
14	25.6	20.8				
16	22.8	19.3	18.9			
18	20.7	18.0	17.5	14.6	12.4	
20	19.1	16.7	15.4	12.6	10.7	9.1
22	17.4	15.5	13.5	10.9	9.2	7.9
24	16.0	14.5	11.9	9.6	7.9	6.7
26	14.8	13.3	10.5	8.4	6.8	5.6
28	13.7	12.0	9.3	7.3	5.8	4.8
30	12.9	10.9	8.2	6.3	4.9	4.0
32	12.1	9.9	7.3	5.5	4.2	3.3
34		8.9	6.4	4.6	3.5	2.7
36		8.1	5.7	4.0	2.9	2.1
38		7.3	5.0	3.4	2.3	
40		6.6	4.3	2.8	1.9	
42		6.0	3.8	2.3		
44		5.3	3.2	1.8		
46		4.7	2.7			
48		4.2	2.2			
50		3.7	1.8			
52		3.3				
54		2.9				
56		2.5				
58		2.1				
60		1.8				
62		1.5				
组合 code	000000	211111	221111	222111	222211	222221
倍率	4	2	2	2	2	1
吊钩重量	1.9			1.3		

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m 9.6m×9.6m	360°	140t	24m	0°	
	15.3+2.5 m 24 m	50+2.5 m 24 m	55+2.5 m 24 m	59.9+2.5 m 24 m	64.9+2.5 m 24 m	69.9+2.5 m 24 m
6						6
7	35.6					7
8	33.1					8
9	30.5					9
10	27.7					10
11	25.9					11
12	24.5					12
13	23.1					13
14	21.9					14
16	19.9	16.4				16
18	18.1	15.2	14.8			18
20	16.6	14.2	14.0	11.8	10.0	20
22	15.3	13.1	12.6	10.4	8.5	22
24	14.2	12.2	11.1	9.0	7.3	24
26	13.1	11.4	9.8	7.7	6.2	26
28	12.1	10.6	8.7	6.7	5.3	28
30	11.3	10.0	7.7	5.7	4.5	30
32	10.6	9.0	6.7	4.9	3.6	32
34	10.1	8.2	5.9	4.2	3.0	34
36	9.7	7.3	5.2	3.6	2.4	36
38		6.6	4.4	3.0		38
40		6.0	3.8	2.4		40
42		5.4	3.3	1.9		42
44		4.7	2.7			44
46		4.2	2.3			46
48		3.7	1.8			48
50		3.3	1.5			50
52		2.8				52
54		2.5				54
56		2.0				56
58		1.8				58
组合 code	000000	211111	221111	222111	222211	222221
倍率	3	2	2	2	2	1
吊钩重量				1.3		

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m 9.6m×9.6m	360°	140t	30m	0°	
	15.3+2.5 m 30 m	50+2.5 m 30 m	55+2.5 m 30 m	59.9+2.5 m 30 m	64.9+2.5 m 30 m	69.9+2.5 m 30 m
6						6
7						7
8	27.5					8
9	25.7					9
10	24.0					10
11	22.5					11
12	21.2					12
13	20.1					13
14	19.1					14
16	17.2	14.4				16
18	15.7	13.2	12.8			18
20	14.3	12.1	12.0	11.1		20
22	13.0	11.4	11.2	9.8	7.9	22
24	11.8	10.5	10.5	8.5	6.8	24
26	11.0	9.9	9.3	7.2	5.7	26
28	10.2	9.2	8.1	6.2	4.8	28
30	9.7	8.6	7.1	5.3	4.0	30
32	9.0	8.1	6.2	4.4	3.2	32
34	8.4	7.5	5.5	3.8	2.6	34
36	7.9	6.8	4.7	3.1		36
38	7.4	6.0	4.0	2.5		38
40	7.0	5.4	3.4	2.0		40
42	6.5	4.8	2.9			42
44		4.2	2.4			44
46		3.7	2.0			46
48		3.3	1.6			48
50		2.9				50
52		2.4				52
54		2.0				54
56		1.7				56
组合 code	000000	211111	221111	222111	222211	222221
倍率	3	2	2	1.3	1	1
吊钩重量						吊钩重量

起重性能表

Lifting capacities

T 15.3~64.9m

吊钩重量 组合 code 倍率	15.3-69.9m	9.6m×9.6m	360°	140t	36m	0°	59.9+2.5 m	64.9+2.5 m	7 8 9 10 11 12 13 14 16 18 20 22 24 26 28 30 32 34 36 38 40 42 44 46 48 50 52 54 组合 code 倍率
	15.3+2.5 m	50+2.5 m	55+2.5 m	36 m	36 m	36 m			
7	36 m	36 m	36 m	36 m	36 m	36 m	36 m	36 m	7
8									8
9	22.3								9
10	21.1								10
11	20.0								11
12	18.9								12
13	17.9								13
14	16.9								14
16	15.2								16
18	13.8	11.2		10.7					18
20	12.6	10.6		10.1		9.5			20
22	11.5	9.9		9.5		9.0			22
24	10.6	9.2		8.9		8.0		6.3	24
26	9.9	8.5		8.4		6.7		5.1	26
28	9.2	7.9		7.5		5.6		4.2	28
30	8.6	7.3		6.6		4.8		3.5	30
32	7.9	6.9		5.7		4.0			32
34	7.5	6.4		4.9		3.3			34
36	7.0	5.9		4.3		2.6			36
38	6.6	5.5		3.5					38
40	6.1	4.9		2.9					40
42	5.7	4.2		2.4					42
44	5.3	3.7		2.0					44
46	5.1	3.3							46
48	4.8	2.8							48
50		2.4							50
52		1.9							52
54		1.5							54
组合 code 倍率	000000	211111		221111		222111		222211	组合 code 倍率
吊钩重量	2	1		1		1		1	吊钩重量

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m 9.6m×9.6m	360° 140t	42m 55+2.5 m	0°	59.9+2.5 m	64.9+2.5 m	
8	42 m						8
9							9
10							10
11	17.8						11
12	16.8						12
13	15.8						13
14	15.0						14
16	13.5						16
18	12.3						18
20	11.2	9.2	8.8				20
22	10.2	8.6	8.3	8.1			22
24	9.5	8.0	7.8	7.5			24
26	8.8	7.5	7.2	6.3	4.7		26
28	8.1	6.9	6.8	5.3	3.9		28
30	7.5	6.4	6.2	4.4			30
32	6.9	5.8	5.3	3.6			32
34	6.4	5.5	4.5	2.9			34
36	5.9	5.0	3.8				36
38	5.5	4.7	3.2				38
40	5.1	4.3	2.6				40
42	4.7	3.8					42
44	4.4	3.3					44
46	4.2	2.7					46
48	3.8	2.3					48
50	3.6	1.9					50
52	3.4						52
组合 code	000000	211111	221111	222111	222211		组合 code
倍率	2	1	1	1	1		倍率
吊钩重量			1.3				吊钩重量

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m 9.6m×9.6m	360°	80t	6m	0°		
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m	
3	6 m	6 m	6 m	6 m	6 m	6 m	3
3.5	74.9						3.5
4	73.9						4
4.5	71.3						4.5
5	67.1						5
6	60.0						6
7	53.5						7
8	48.7						8
9	44.5						9
10	40.6	21.6					10
11	37.9	19.9	17.2				11
12	35.2	18.9	15.5	12.4			12
13	32.7	17.3	14.1	11.1	9.7		13
14	30.7	15.9	12.8	10.3	8.6	6.4	14
16	27.7	13.4	10.8	9.1	6.7	4.7	16
18	24.7	11.6	10.0	7.5	5.2	3.6	18
20	22.2	10.1	8.5	6.1	4.1	2.6	20
22		9.6	7.1	4.9	3.1	1.7	22
24		8.5	6.0	3.9	2.3		24
26		7.3	5.1	3.1	1.6		26
28		6.3	4.2	2.4			28
30		5.5	3.5	1.8			30
32		4.9	2.9				32
34		4.2	2.4				34
36		3.6	1.9				36
38		3.2	1.5				38
40		2.7					40
42		2.3					42
44		2.0					44
46		1.6					46
组合 code	000000	211111	221111	222111	222211	222221	组合 code
倍率	6	2	2	2	1	1	倍率
吊钩重量	1.9			1.3			吊钩重量

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m 9.6m×9.6m	360°	80t	12m	0°	
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m
4						
4.5	64.6					
5	61.8					
6	56.8					
7	52.4					
8	49.0					
9	45.7					
10	42.4					
11	39.6					
12	37.5	27.6				
13	35.2	26.4				
14	33.0	25.3	24.4			
16	29.7	23.4	21.3	17.9		
18	26.8	21.8	18.6	15.5	13.2	11.6
20	24.2	20.1	16.4	13.5	11.4	9.8
22	22.2	17.9	14.3	11.7	9.8	8.4
24	20.5	16.0	12.6	10.2	8.5	7.2
26	19.2	14.5	11.2	9.0	7.4	6.2
28		12.9	10.1	7.8	6.3	5.3
30		11.7	9.0	6.9	5.5	4.5
32		10.5	8.0	6.0	4.6	3.8
34		9.6	7.0	5.2	3.9	3.1
36		8.7	6.1	4.4	3.3	2.5
38		7.9	5.4	3.7	2.6	1.9
40		7.1	4.8	3.1	2.1	
42		6.4	4.2	2.6	1.7	
44		5.8	3.6	2.1		
46		4.9	3.1	1.7		
48		4.1	2.6			
50		3.3	2.1			
52		2.6	1.7			
54		2.0				
组合 code	000000	211111	221111	222111	222211	222221
倍率	5	3	2	2	2	2
吊钩重量	1.9					

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m 9.6m×9.6m	360°	80t	18m	0°	
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m
5						5
6	45.5					6
7	42.0					7
8	39.0					8
9	35.9					9
10	33.0					10
11	30.6					11
12	29.1					12
13	27.2	21.6				13
14	25.6	20.8				14
16	22.8	19.3	18.9			16
18	20.7	18.0	17.5	14.6	12.4	18
20	19.1	16.7	15.4	12.6	10.7	20
22	17.4	15.5	13.5	10.9	9.2	22
24	16.0	14.5	11.9	9.6	7.9	24
26	14.8	13.3	10.5	8.4	6.8	26
28	13.7	12.0	9.3	7.3	5.8	28
30	12.9	10.9	8.2	6.3	4.9	30
32	12.1	9.9	7.3	5.5	4.2	32
34		8.9	6.4	4.6	3.5	34
36		8.1	5.7	4.0	2.9	36
38		7.3	5.0	3.4	2.3	38
40		6.6	4.3	2.8	1.9	40
42		6.0	3.8	2.3		42
44		5.3	3.2	1.8		44
46		4.7	2.7			46
48		4.2	2.2			48
50		3.7	1.8			50
52		3.0	1.4			52
54		2.3				54
56		1.7				56
组合 code	000000	211111	221111	222111	222211	222221
倍率	3	2	2	2	2	1
吊钩重量				1.3		

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m 9.6m×9.6m	360°	80t	24m	0°	
	15.3+2.5 m 24 m	50+2.5 m 24 m	55+2.5 m 24 m	59.9+2.5 m 24 m	64.9+2.5 m 24 m	69.9+2.5 m 24 m
6						6
7	35.6					7
8	33.1					8
9	30.5					9
10	27.7					10
11	25.9					11
12	24.5					12
13	23.1					13
14	21.9					14
16	19.9	16.4				16
18	18.1	15.2	14.8			18
20	16.6	14.2	14.0	11.8	10.0	20
22	15.3	13.1	12.6	10.4	8.5	22
24	14.2	12.2	11.1	9.0	7.3	24
26	13.1	11.4	9.8	7.7	6.2	26
28	12.1	10.6	8.7	6.7	5.3	28
30	11.3	10.0	7.7	5.7	4.5	30
32	10.6	9.0	6.7	4.9	3.6	32
34	10.1	8.2	5.9	4.2	3.0	34
36	9.7	7.3	5.2	3.6	2.4	36
38		6.6	4.4	3.0		38
40		6.0	3.8	2.4		40
42		5.4	3.3	1.9		42
44		4.7	2.7			44
46		4.2	2.3			46
48		3.7	1.8			48
50		3.3	1.5			50
52		2.8				52
54		2.5				54
56		1.9				56
组合 code	000000	211111	221111	222111	222211	222221
倍率	3	2	2	2	2	1
吊钩重量				1.3		

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m 9.6m×9.6m	360°	80t	30m	0°		
	15.3+2.5 m 30 m	50+2.5 m 30 m	55+2.5 m 30 m	59.9+2.5 m 30 m	64.9+2.5 m 30 m	69.9+2.5 m 30 m	
6							6
7							7
8	27.5						8
9	25.7						9
10	24.0						10
11	22.5						11
12	21.2						12
13	20.1						13
14	19.1						14
16	17.2	14.4					16
18	15.7	13.2	12.8				18
20	14.3	12.1	12.0	11.1			20
22	13.0	11.4	11.2	9.8	7.9		22
24	11.8	10.5	10.5	8.5	6.8	5.6	24
26	11.0	9.9	9.3	7.2	5.7	4.6	26
28	10.2	9.2	8.1	6.2	4.8	3.7	28
30	9.7	8.6	7.1	5.3	4.0	3.0	30
32	9.0	8.1	6.2	4.4	3.2		32
34	8.4	7.5	5.5	3.8	2.6		34
36	7.9	6.8	4.7	3.1			36
38	7.4	6.0	4.0	2.5			38
40	7.0	5.4	3.4	2.0			40
42	6.5	4.8	2.9				42
44		4.2	2.4				44
46		3.7	2.0				46
48		3.3	1.6				48
50		2.9					50
52		2.4					52
54		2.0					54
56		1.7					56
组合 code	000000	211111	221111	222111	222211	222221	组合 code
倍率	3	2	2	1.3	1	1	倍率
吊钩重量							吊钩重量

起重性能表

Lifting capacities

T 15.3~64.9m

	15.3-69.9m 9.6m×9.6m	360° 80t	36m 0°	59.9+2.5 m	64.9+2.5 m	
15.3+2.5 m	36 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	
7						7
8						8
9	22.3					9
10	21.1					10
11	20.0					11
12	18.9					12
13	17.9					13
14	16.9					14
16	15.2					16
18	13.8	11.2	10.7			18
20	12.6	10.6	10.1	9.5		20
22	11.5	9.9	9.5	9.0		22
24	10.6	9.2	8.9	8.0	6.3	24
26	9.9	8.5	8.4	6.7	5.1	26
28	9.2	7.9	7.5	5.6	4.2	28
30	8.6	7.3	6.6	4.8	3.5	30
32	7.9	6.9	5.7	4.0		32
34	7.5	6.4	4.9	3.3		34
36	7.0	5.9	4.3	2.6		36
38	6.6	5.5	3.5			38
40	6.1	4.9	2.9			40
42	5.7	4.2	2.4			42
44	5.3	3.7	2.0			44
46	5.1	3.3				46
48	4.8	2.8				48
50		2.4				50
52		1.9				52
组合 code	000000	211111	221111	222111	222211	组合 code
倍率	2	1	1	1	1	倍率
吊钩重量			1.3			吊钩重量

起重性能表

Lifting capacities


T 15.3~64.9m

	15.3-69.9m 9.6m×9.6m	360° 80t	42m 0°	59.9+2.5 m	64.9+2.5 m	
8	42 m					8
9						9
10						10
11	17.8					11
12	16.8					12
13	15.8					13
14	15.0					14
16	13.5					16
18	12.3					18
20	11.2	9.2	8.8			20
22	10.2	8.6	8.3	8.1		22
24	9.5	8.0	7.8	7.5		24
26	8.8	7.5	7.2	6.3	4.7	26
28	8.1	6.9	6.8	5.3	3.9	28
30	7.5	6.4	6.2	4.4		30
32	6.9	5.8	5.3	3.6		32
34	6.4	5.5	4.5	2.9		34
36	5.9	5.0	3.8			36
38	5.5	4.7	3.2			38
40	5.1	4.3	2.6			40
42	4.7	3.8				42
44	4.4	3.3				44
46	4.2	2.7				46
48	3.8	2.3				48
50	3.6	1.9				50
52	3.4					52
组合 code	000000	211111	221111	222111	222211	组合 code
倍率	2	1	1	1	1	倍率
吊钩重量			1.3			吊钩重量

起升高度曲线图

Lifting height chart

固定副臂
Fixed Jib

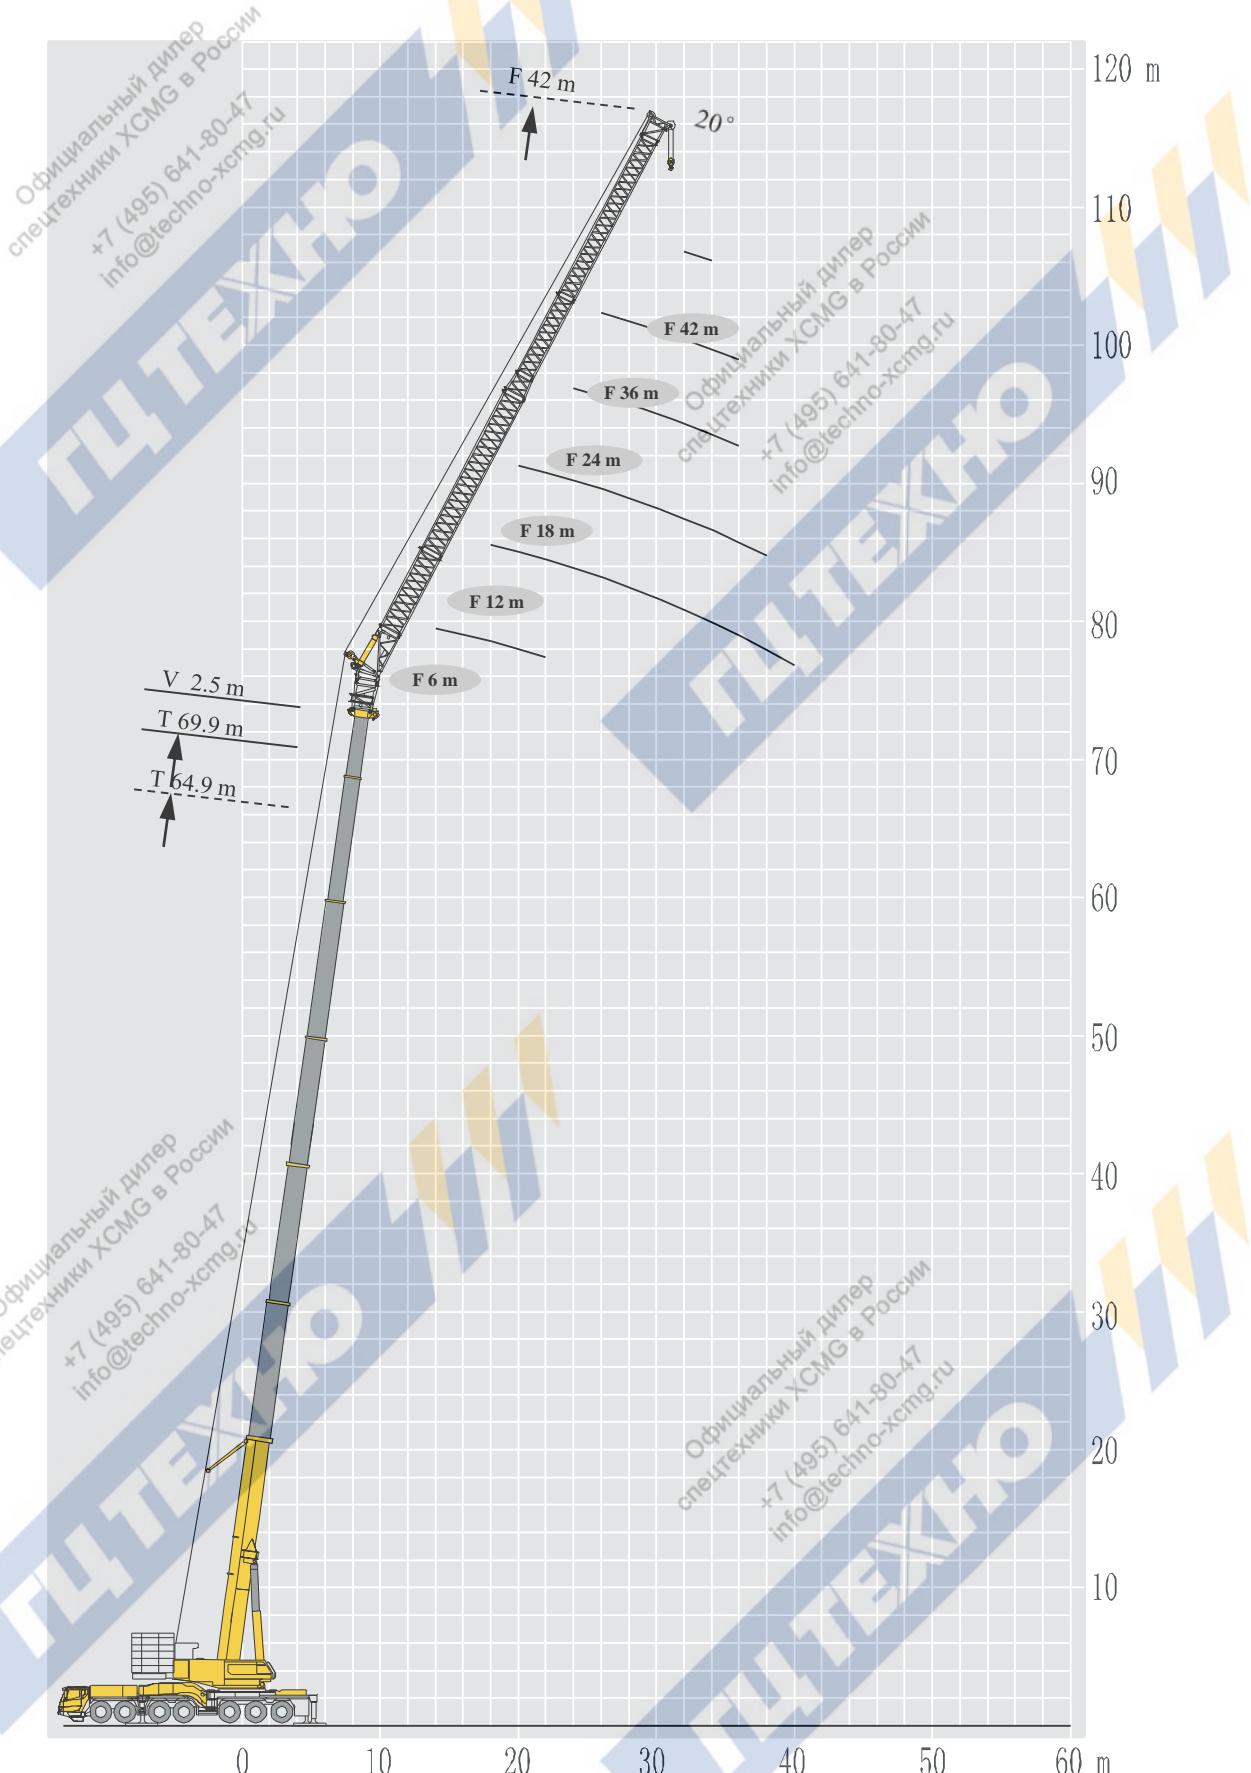

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m 9.6m×9.6m 360° 140t 6m 20°	15.3+2.5 m 6 m	50+2.5 m 6 m	55+2.5 m 6 m	59.9+2.5 m 6 m	64.9+2.5 m 6 m	69.9+2.5 m 6 m	
5	41.9							5
6	39.7							6
7	37.1							7
8	34.6							8
9	32.4							9
10	30.5							10
11	29.5	15.3						11
12	28.3	14.4	12.1					12
13	26.9	13.4	11.2	10.1				13
14	25.6	12.6	10.4	9.3				14
16	23.5	11.2	10.0	7.8	5.9		4.2	16
18	21.8	10.2	8.7	6.6	4.8		3.4	18
20	20.5	9.6	7.5	5.5	3.9		2.6	20
22	20.5	8.5	6.4	4.7	3.1		1.8	22
24		7.5	5.6	3.8	2.4			24
26		6.7	4.8	3.1	1.7			26
28		6.0	4.2	2.5				28
30		5.3	3.6	2.0				30
32		4.7	3.0					32
34		4.2	2.5					34
36		3.6	2.1					36
38		3.3	1.7					38
40		2.9						40
42		2.5						42
44		2.1						44
46		1.8						46
48		1.6						48
组合 code	000000	211111	221111	222111	222211	222221		组合 code
倍率	3	2	1	1.3	1	1	1	倍率
吊钩重量								吊钩重量

起重性能表

Lifting capacities

T 15.3~69.9m

组合 code	吊钩重量 倍率	起重性能表						组合 code
		15.3-69.9m	9.6m×9.6m	360°	140t	12m	20°	
8		15.3+2.5 m	12 m					8
9			50+2.5 m	12 m				9
10				55+2.5 m	12 m			10
11					59.9+2.5 m	12 m		11
12						64.9+2.5 m	12 m	12
13							69.9+2.5 m	13
14								14
16		23.3		18.0				16
18		21.6		16.9				18
20		20.4		15.9				20
22		19.6		15.1				22
24		18.6		14.3				24
26		17.9		13.6				26
28		17.8		12.5				28
30				11.4				30
32				10.4				32
34				9.6				34
36				8.7				36
38				7.9				38
40				7.2				40
42				6.5				42
44				5.9				44
46				5.3				46
48				4.7				48
50				4.3				50
52				3.8				52
54				3.4				54
56				2.9				56
58				2.5				58
组合 code	000000	211111		221111		222111	222211	222221
倍率	3	2		2		2	2	1
吊钩重量					1.3			

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m 9.6m×9.6m	360°	140t	18m	20°		
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9 +2.5m	69.9+2.5 m	
12	21.0						12
13	20.0						13
14	19.1						14
16	17.6						16
18	16.3						18
20	15.2	12.5					20
22	14.2	11.8	11.8				22
24	13.4	11.2	11.3	9.7	8.1		24
26	12.7	10.6	10.4	8.6	7.1	5.9	26
28	12.2	10.1	9.4	7.6	6.2	5.1	28
30	11.7	9.6	8.4	6.6	5.3	4.4	30
32	11.4	9.2	7.5	5.8	4.6	3.7	32
34	11.4	8.8	6.6	5.1	4.0	3.1	34
36		8.0	5.9	4.3	3.3	2.6	36
38		7.2	5.2	3.8	2.8	2.1	38
40		6.6	4.7	3.2	2.2		40
42		6.0	4.1	2.7	1.8		42
44		5.5	3.6	2.2			44
46		4.9	3.0	1.8			46
48		4.3	2.6				48
50		3.9	2.1				50
52		3.4	1.7				52
54		3.0					54
56		2.7					56
58		2.3					58
60		2.0					60
62		1.6					62
组合 code	000000	211111	221111	222111	222211	222221	组合 code
倍率	2	1	1	1	1	1	倍率
吊钩重量				1.3			吊钩重量

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m	9.6m×9.6m	360°	140t	24m	20°	
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m	
14	24 m						14
16	15.4						16
18	14.2						18
20	13.2						20
22	12.3						22
24	11.6	9.1					24
26	10.8	8.7	8.7				26
28	10.3	8.2	8.2	7.1			28
30	10.0	7.7	7.8	6.2	5.7		30
32	9.7	7.4	6.9	5.4	4.3	4.0	32
34	9.2	7.1	6.2	4.7	3.6	3.4	34
36	8.9	6.7	5.6	4.0	3.0	2.8	36
38	8.7	6.3	4.9	3.4	2.4		38
40	8.7	6.0	4.3	2.8	2.0		40
42		5.5	3.7	2.4			42
44		4.9	3.2	1.9			44
46		4.4	2.7	1.5			46
48		4.0	2.3				48
50		3.5	1.8				50
52		3.1	1.5				52
54		2.7					54
56		2.3					56
58		1.9					58
60		1.5					60
组合 code	000000	211111	221111	222111	222211	222221	组合 code
倍率	2	1	1	1	1	1	倍率
吊钩重量			1.3				吊钩重量

	15.3-69.9m	9.6m×9.6m	360°	140t	30m	20°	
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m	
16	30 m						16
18	11.8						18
20	10.9						20
22	10.1						22
24	9.8						24
26	9.2	7.3					26
28	8.6	6.8	6.5				28
30	8.1	6.4	6.3	5.9			30
32	7.7	6.1	6.1	5.2	4.0		32
34	7.2	5.7	5.8	4.5	3.3		34
36	6.8	5.4	5.2	3.9	2.8		36
38	6.5	5.2	4.5	3.2	2.2		38
40	6.3	4.9	4.0	2.7			40
42	6.0	4.6	3.5	2.2			42
44	5.8	4.5	2.9	1.8			44
46	5.8	4.1	2.5				46
48		3.6	2.1				48
50		3.2	1.6				50
52		2.7					52
54		2.3					54
56		2.0					56
58		1.6					58
组合 code	000000	211111	221111	222111	222211	222221	组合 code
倍率	1	1	1	1	1	1	倍率
吊钩重量			1.3				吊钩重量

起重性能表

Lifting capacities

	15.3-69.9m 9.6m×9.6m	36 m	50+2.5 m	36 m	55+2.5 m	36 m	59.9+2.5 m	36 m	64.9+2.5 m	
20										20
22		9.4								22
24		8.8								24
26		8.1								26
28		7.7								28
30		7.1		5.3						30
32		6.7		5.0		5.1				32
34		6.3		4.6		4.7		4.1		34
36		6.0		4.4		4.4		3.5		36
38		5.6		4.1		4.2		3.0		38
40		5.3		3.9		3.6		2.4		40
42		5.0		3.6		3.2				42
44		4.8		3.5		2.6				44
46		4.6		3.3		2.2				46
48		4.4		3.1		1.7				48
50		4.2		2.8						50
52		4.2		2.4						52
54				2.0						54
56				1.6						56
组合 code	000000		211111		221111		222111		222211	组合 code
倍率	1		1		1		1		1	倍率
吊钩重量					1.3					吊钩重量

	15.3-69.9m 9.6m×9.6m	42 m	50+2.5 m	42 m	55+2.5 m	42 m	59.9+2.5 m	42 m	64.9+2.5 m	
22										22
24		7.5								24
26		6.9								26
28		6.4								28
30		6.0								30
32		5.5								32
34		5.1		3.9						34
36		4.7		3.6		3.8				36
38		4.5		3.3		3.4				38
40		4.3		3.1		3.1				40
42		4.0		2.9		2.8				42
44		3.8		2.7		2.3				44
46		3.5		2.5						46
48		3.3		2.3						48
50		3.2		2.2						50
52		3.0		2.0						52
54		2.9		1.7						54
组合 code	000000		211111		221111		222111		222211	组合 code
倍率	1		1		1		1		1	倍率
吊钩重量					1.3					吊钩重量

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m 吊臂仰角 吊钩重量	9.6m×9.6m 幅度 360°	80t 起重量	6m 起升高度	20° 仰角	15.3+2.5 m 6 m	50+2.5 m 6 m	55+2.5 m 6 m	59.9+2.5 m 6 m	64.9+2.5 m 6 m	69.9+2.5 m 6 m	
5	41.9											5
6	39.7											6
7	37.1											7
8	34.6											8
9	32.4											9
10	30.5											10
11	29.5		15.3									11
12	28.3		14.4	12.1								12
13	26.9		13.4	11.2	10.1							13
14	25.6		12.6	10.4	9.3							14
16	23.5		11.2	10.0	7.8				5.9		4.2	16
18	21.8		10.2	8.7	6.6				4.8		3.4	18
20	20.5		9.6	7.5	5.5				3.9		2.6	20
22	20.5		8.5	6.4	4.7				3.1		1.8	22
24			7.5	5.6	3.8				2.4			24
26			6.7	4.8	3.1				1.7			26
28			6.0	4.2	2.5							28
30			5.3	3.6	2.0							30
32			4.7	3.0								32
34			4.2	2.5								34
36			3.6	2.1								36
38			3.3	1.7								38
40			2.9									40
42			2.5									42
44			2.1									44
46			1.8									46
48			1.6									48
组合 code	000000	211111	221111	222111	222211	222221						组合 code
倍率	4	2	1	1.3	1	1						倍率
吊钩重量												吊钩重量

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m 15.3+2.5 m 12 m	9.6m×9.6m 50+2.5 m 12 m	360° 80t 55+2.5 m 12 m	12m 59.9+2.5 m 12 m	20° 64.9+2.5 m 12 m	69.9+2.5 m 12 m	
8							8
9	31.9						9
10	30.4						10
11	29.2						11
12	27.7						12
13	26.5						13
14	25.4						14
16	23.3	18.0					16
18	21.6	16.9	17.0				18
20	20.4	15.9	15.7	13.1	11.2		20
22	19.6	15.1	13.9	11.6	9.8	8.4	22
24	18.6	14.3	12.3	10.2	8.5	7.3	24
26	17.9	13.6	11.0	9.0	7.5	6.4	26
28	17.8	12.5	10.0	8.0	6.6	5.5	28
30		11.4	8.9	7.0	5.7	4.7	30
32		10.4	8.0	6.0	4.8	4.0	32
34		9.6	7.2	5.3	4.1	3.4	34
36		8.7	6.3	4.6	3.5	2.8	36
38		7.9	5.6	4.0	3.0	2.3	38
40		7.2	4.9	3.4	2.4	1.8	40
42		6.5	4.3	2.8	2.0		42
44		5.9	3.7	2.4			44
46		5.3	3.2	1.9			46
48		4.7	2.8				48
50		3.8	2.3				50
52		3.1	1.9				52
54		2.3					54
56		1.6					56
组合 code	000000	211111	221111	222111	222211	222221	组合 code
倍率	3	2	2	2	2	1	倍率
吊钩重量				1.3			吊钩重量

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m	9.6m×9.6m	360°	800t	18m	20°	
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m	
12	21.0						12
13	20.0						13
14	19.1						14
16	17.6						16
18	16.3						18
20	15.2	12.5					20
22	14.2	11.8	11.8				22
24	13.4	11.2	11.3	9.7	8.1		24
26	12.7	10.6	10.4	8.6	7.1	5.9	26
28	12.2	10.1	9.4	7.6	6.2	5.1	28
30	11.7	9.6	8.4	6.6	5.3	4.4	30
32	11.4	9.2	7.5	5.8	4.6	3.7	32
34	11.4	8.8	6.6	5.1	4.0	3.1	34
36		8.0	5.9	4.3	3.3	2.6	36
38		7.2	5.2	3.8	2.8	2.1	38
40		6.6	4.7	3.2	2.2		40
42		6.0	4.1	2.7	1.8		42
44		5.5	3.6	2.2			44
46		4.9	3.0	1.8			46
48		4.3	2.6				48
50		3.9	2.1				50
52		3.4	1.7				52
54		3.0					54
56		2.4					56
58		1.7					58
组合 code	000000	211111	221111	222111	222211	222221	组合 code
倍率	2	1	1	1	1	1	倍率
吊钩重量				1.3			吊钩重量

T 15.3~69.9m

起重性能表 Lifting capacities



	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m
14	24 m	24 m				
16	15.4					
18	14.2					
20	13.2					
22	12.3					
24	11.6	9.1				
26	10.8	8.7	8.7	7.9		
28	10.3	8.2	8.2	7.1	5.7	
30	10.0	7.7	7.8	6.2	5.0	4.0
32	9.7	7.4	6.9	5.4	4.3	3.4
34	9.2	7.1	6.2	4.7	3.6	2.8
36	8.9	6.7	5.6	4.0	3.0	2.3
38	8.7	6.3	4.9	3.4	2.4	
40	8.7	6.0	4.3	2.8	2.0	
42		5.5	3.7	2.4		
44		4.9	3.2	1.9		
46		4.4	2.7			
48		4.0	2.3			
50		3.5	1.8			
52		3.1				
54		2.7				
56		2.3				
58		1.9				
组合 code	000000	211111	221111	222111	222211	222221
倍率	2	1	1	1	1	1
吊钩重量			1.3			



	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m
	30 m	30 m	30 m	30 m	30 m	30 m
16						
18	11.8					
20	10.9					
22	10.4					
24	9.8					
26	9.2	7.3				
28	8.6	6.8	6.5			
30	8.1	6.4	6.3	5.9		
32	7.7	6.1	6.1	5.2	4.0	
34	7.2	5.7	5.8	4.5	3.3	
36	6.8	5.4	5.2	3.9	2.8	
38	6.5	5.2	4.5	3.2	2.2	
40	6.3	4.9	4.0	2.7		
42	6.0	4.6	3.5	2.2		
44	5.8	4.5	2.9	1.8		
46	5.8	4.1	2.5			
48		3.6	2.1			
50		3.2	1.6			
52		2.7				
54		2.3				
56		2.0				
58		1.6				
组合 code	000000	211111	221111	222111	222211	222221
倍率	1	1	1	1	1	1
吊钩重量			1.3			

起重性能表

Lifting capacities

T 15.3~64.9m


		15.3-69.9m 9.6m×9.6m	360°	80t	36m	20°	
		15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	
		36 m	36 m	36 m	36 m	36 m	
20							20
22		9.4					22
24		8.8					24
26		8.1					26
28		7.7					28
30		7.1	5.3				30
32		6.7	5.0	5.1			32
34		6.3	4.6	4.7	4.1		34
36		6.0	4.4	4.4	3.5		36
38		5.6	4.1	4.2	3.0		38
40		5.3	3.9	3.6	2.4		40
42		5.0	3.6	3.2			42
44		4.8	3.5	2.6			44
46		4.6	3.3	2.2			46
48		4.4	3.1	1.7			48
50		4.2	2.8				50
52		4.2	2.4				52
54			2.0				54
56			1.6				56
组合 code	000000	211111	221111	222111	222211		组合 code
倍率	1	1	1	1	1		倍率
吊钩重量			1.3				吊钩重量

		15.3-69.9m 9.6m×9.6m	360°	80t	42m	20°	
		15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	
		42 m	42 m	42 m	42 m	42 m	
22							22
24		7.5					24
26		6.9					26
28		6.4					28
30		6.0					30
32		5.5					32
34		5.1	3.9	4.1			34
36		4.7	3.6	3.8			36
38		4.5	3.3	3.4			38
40		4.3	3.1	3.1			40
42		4.0	2.9	2.8			42
44		3.8	2.7	2.3			44
46		3.5	2.5				46
48		3.3	2.3				48
50		3.2	2.2				50
52		3.0	2.0				52
54		2.9	1.7				54
组合 code	000000	211111	221111	222111	222211		组合 code
倍率	1	1	1	1	1		倍率
吊钩重量			1.3				吊钩重量

起升高度曲线图

Lifting height chart

固定副臂
Fixed Jib

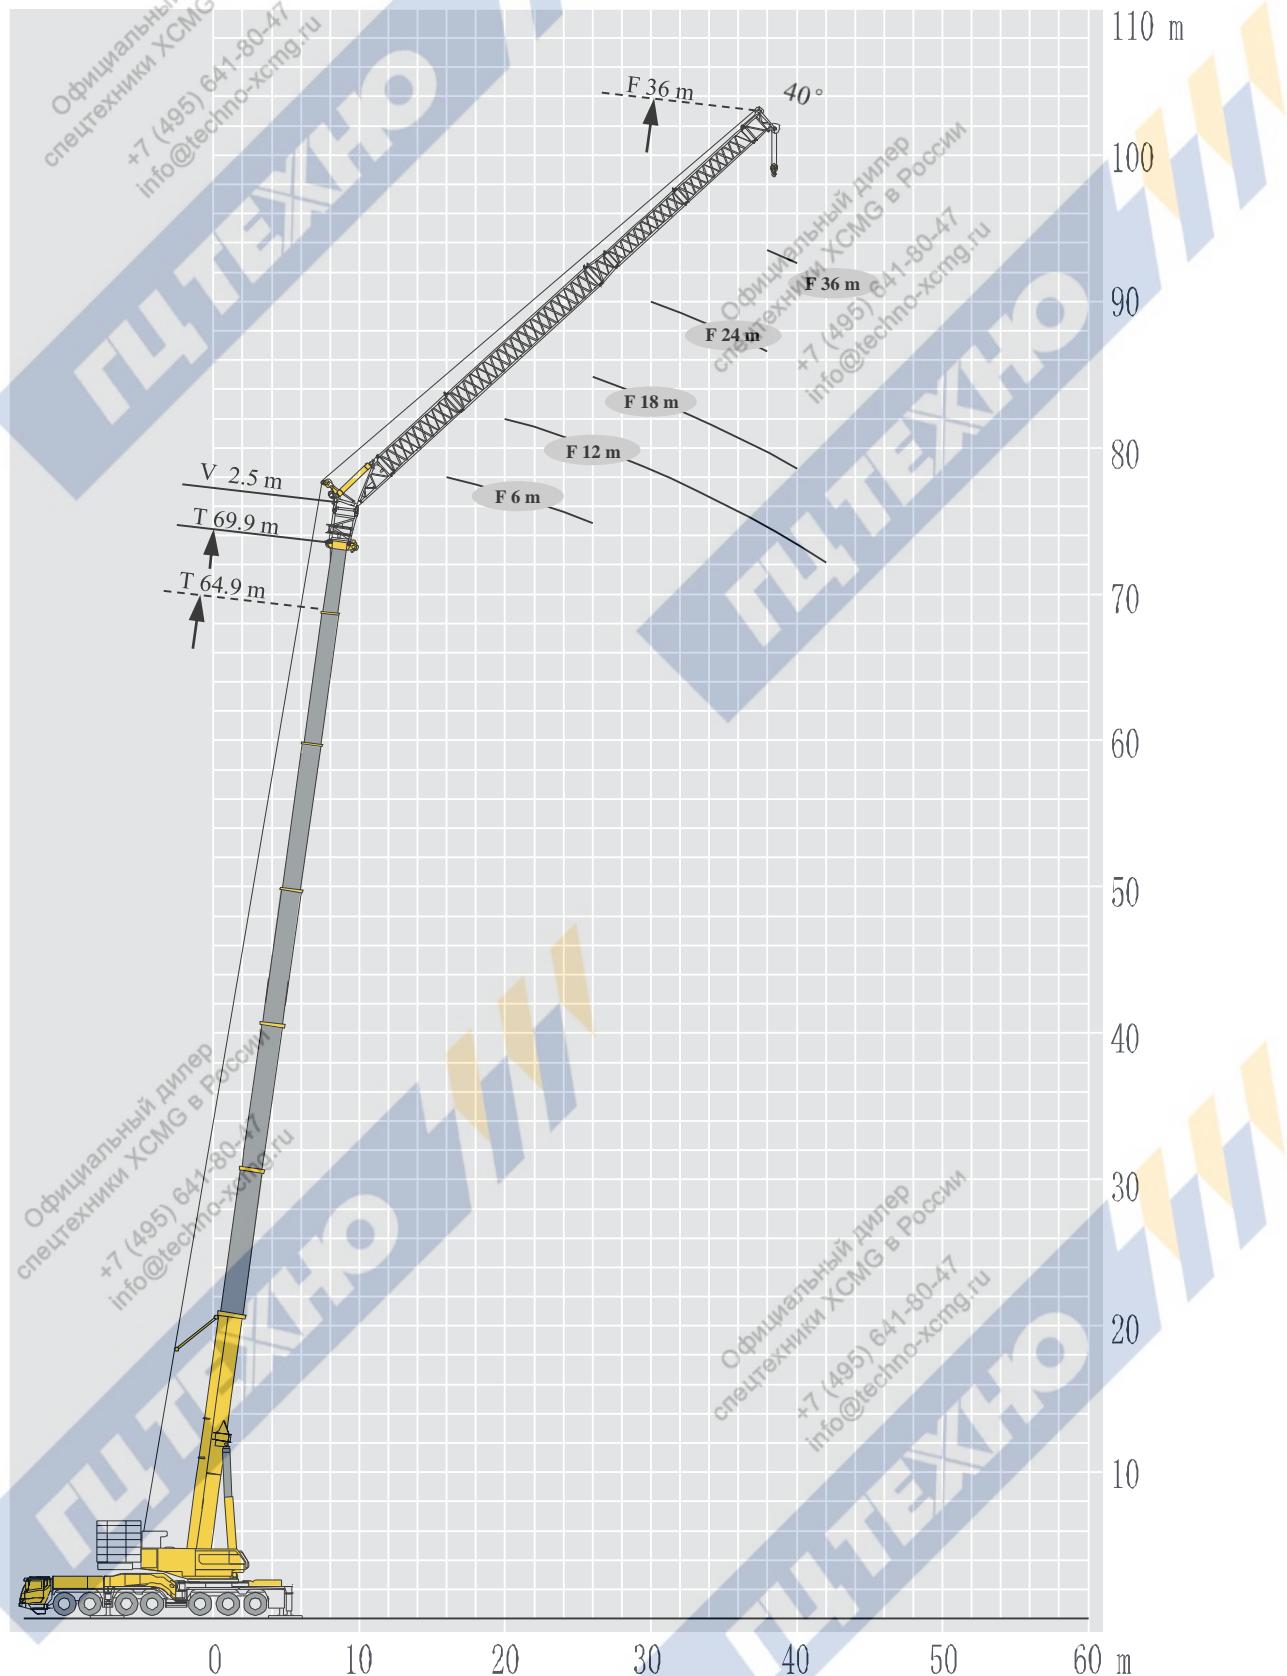

T 15.3~69.9m

起重性能表

Lifting capacities

	15.3-69.9m	9.6m×9.6m	360°	140t	6m	40°	
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m	
7	27.6						7
8	26.4						8
9	25.2						9
10	24.2						10
11	23.5						11
12	22.6						12
13	21.8		12.4				13
14	21.3		11.7	10.3			14
16	20.4		10.7	9.9	8.1		16
18	20.2		10.2	8.9	7.1	6.3	18
20			9.8	8.0	6.2	5.5	20
22			8.9	7.1	5.5	4.7	22
24			8.1	6.4	4.8	4.0	24
26			7.4	5.7	4.2	3.4	26
28			6.8	5.1	3.6	2.8	28
30			6.2	4.5	3.0	2.3	30
32			5.6	4.0	2.6		32
34			5.2	3.6	2.2		34
36			4.8	3.2	1.8		36
38			4.3	2.8			38
40			4.0	2.4			40
42			3.6	2.0			42
44			3.2	1.6			44
组合 code	000000	211111	221111	222111	222211	222221	组合 code
倍率	2	1	1	1	1	1	倍率
吊钩重量			1.3				吊钩重量

	15.3-69.9m	9.6m×9.6m	360°	140t	12m	40°	
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9 +2.5m	69.9+2.5 m	
12	20.2						12
13	20.1						13
14	19.8						14
16	18.7						16
18	17.8						18
20	17.1	13.5					20
22	16.6	13.0	13.0	11.2			22
24		12.4	12.2	10.1	8.5		24
26		11.8	10.9	9.0	7.6	6.5	26
28		11.5	9.9	8.0	6.6	5.6	28
30		11.0	8.9	7.1	5.8	4.8	30
32		10.4	8.1	6.2	5.1	4.2	32
34		9.5	7.2	5.5	4.4	3.6	34
36		8.7	6.4	4.8	3.7	3.0	36
38		7.9	5.7	4.2	3.1	2.5	38
40		7.2	5.0	3.5	2.6	2.0	40
42		6.5	4.4	3.0	2.1	1.6	42
44		5.9	3.9	2.5	1.7		44
46		5.2	3.3	2.1			46
48		4.7	2.8	1.6			48
50		4.2	2.4	1.2			50
52			1.9				52
组合 code	000000	211111	221111	222111	222211	222221	组合 code
倍率	2	1	1	1	1	1	倍率
吊钩重量			1.3				吊钩重量

起重性能表

Lifting capacities

	15.3-69.9m	9.6m×9.6m	360°	140t	18m	40°	
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m	
16	13.0						16
18	12.4						18
20	11.8						20
22	11.2						22
24	10.8	9.3					24
26	10.6	9.0	9.0				26
28	10.3	8.6	8.6	7.6	6.3		28
30		8.3	8.3	6.8	5.6	4.7	30
32		7.9	7.5	6.0	4.8	4.1	32
34		7.7	6.7	5.3	4.2	3.5	34
36		7.3	6.1	4.7	3.6	2.9	36
38		7.2	5.5	4.1	3.1	2.4	38
40		6.7	4.8	3.4	2.6	2.0	40
42		6.1	4.2	2.9	2.0		42
44		5.5	3.7	2.5	1.6		44
46		5.0	3.2	2.0			46
48		4.4	2.7	1.6			48
50		3.9	2.3				50
52		3.5	1.9				52
54		3.0	1.5				54
56		2.6					56
组合 code	000000	211111	221111	222111	222211	222221	组合 code
倍率	2	1	1	1	1	1	倍率
吊钩重量			1.3				吊钩重量

	15.3-69.9m	9.6m×9.6m	360°	140t	24m	40°	
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5m	69.9+2.5 m	
20							20
22	9.9						22
24	9.5						24
26	9.1						26
28	8.7						28
30	8.3	6.4	6.4				30
32	8.1	6.1	6.2	5.8			32
34	8.0	5.9	6.0	5.1	4.0		34
36		5.6	5.7	4.5	3.4		36
38		5.5	5.1	3.8	2.9		38
40		5.2	4.5	3.2	2.4		40
42		5.0	4.0	2.8	2.0		42
44		4.9	3.5	2.3			44
46		4.5	3.0	1.9			46
48		4.1	2.5	1.5			48
50		3.6	2.2				50
52		3.2	1.7				52
54		2.8	1.4				54
56		2.4					56
58		1.9					58
60		1.6					60
组合 code	000000	211111	221111	222111	222211	222221	组合 code
倍率	1	1	1	1	1	1	倍率
吊钩重量			1.3				吊钩重量

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m 9.6m×9.6m	360° 140t	30m 40°	59.9+2.5 m	64.9+2.5 m
	15.3+2.5 m	50+2.5 m	55+2.5 m	30 m	30 m
26	7.2				
28	6.8				
30	6.4				
32	6.1				
34	5.9	4.6			
36	5.7	4.5	4.4		
38	5.6	4.3	4.3	3.7	
40	5.4	4.1	4.1	3.2	
42		3.9	3.8	2.7	
44		3.7	3.3	2.2	
46		3.6	2.8	1.8	
48		3.5	2.4		
50		3.3	2.0		
52		3.0	1.6		
54		2.5	1.2		
56		2.2			
58		1.9			
60		1.5			
组合 code	000000	211111	221111	222111	222211
倍率	1	1	1	1	1
吊钩重量			1.3		

	15.3-69.9m 9.6m×9.6m	360° 140t	30m 40°	59.9+2.5 m	64.9+2.5 m
	15.3+2.5 m	50+2.5 m	55+2.5 m	36 m	36 m
30	5.3				
32	4.9				
34	4.7				
36	4.6				
40	4.4	3.2	3.0		
42	4.2	2.9	2.9		
44	4.1	2.8	2.8		
46	4.0	2.7	2.6		
48		2.5	2.2		
50		2.3	1.8		
52		2.2	1.4		
54		2.0			
56		1.9			
58		1.6			
组合 code	000000	211111	221111	222111	222211
倍率	1	1	1	1	1
吊钩重量			1.3		

T 15.3~69.9m

起重性能表

Lifting capacities



	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m
7	27.6					
8	26.4					
9	25.2					
10	24.2					
11	23.5					
12	22.6					
13	21.8	12.4				
14	21.3	11.7	10.3			
16	20.4	10.7	9.9	8.1	6.3	
18	20.2	10.2	8.9	7.1	5.5	4.1
20		9.8	8.0	6.2	4.7	3.4
22		8.9	7.1	5.5	4.0	2.8
24		8.1	6.4	4.8	3.4	2.2
26		7.4	5.7	4.2	2.8	1.7
28		6.8	5.1	3.6	2.3	
30		6.2	4.5	3.0	1.9	
32		5.6	4.0	2.6		
34		5.2	3.6	2.2		
36		4.8	3.2	1.8		
38		4.3	2.8			
40		4.0	2.4			
42		3.6	2.0			
44		3.2	1.6			
组合 code	000000	211111	221111	222111	222211	222221
倍率	2	1	1	1	1	1
吊钩重量			1.3			



	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m
12	20.2					
13	20.1					
14	19.8					
16	18.7					
18	17.8					
20	17.1	13.5				
22	16.6	13.0	13.0	11.2		
24		12.4	12.2	10.1	8.5	
26		11.8	10.9	9.0	7.6	6.5
28		11.5	9.9	8.0	6.6	5.6
30		11.0	8.9	7.1	5.8	4.8
32		10.4	8.1	6.2	5.1	4.2
34		9.5	7.2	5.5	4.4	3.6
36		8.7	6.4	4.8	3.7	3.0
38		7.9	5.7	4.2	3.1	2.5
40		7.2	5.0	3.5	2.6	2.0
42		6.5	4.4	3.0	2.1	1.6
44		5.9	3.9	2.5	1.7	
46		5.2	3.3	2.1		
48		4.7	2.8	1.6		
50		4.0	2.4			
52			1.9			
组合 code	000000	211111	221111	222111	222211	222221
倍率	2	1	1	1	1	1
吊钩重量			1.3			

起重性能表

Lifting capacities

T 15.3~69.9m

	15.3-69.9m	9.6m×9.6m	360°	80t	18m	40°			
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m			
16	13.0								
18	12.4								
20	11.8								
22	11.2								
24	10.8	9.3							
26	10.6	9.0	9.0						
28	10.3	8.6	8.6	7.6					
30		8.3	8.3	6.8	6.3				
32		7.9	7.5	6.0	5.6	4.7			
34		7.7	6.7	5.3	4.8	4.1			
36		7.3	6.1	4.7	4.2	3.5			
38		7.2	5.5	4.1	3.6	2.9			
40		6.7	4.8	3.4	2.6	2.0			
42		6.1	4.2	2.9	2.0				
44		5.5	3.7	2.5	1.6				
46		5.0	3.2						
48		4.4	2.7						
50		3.9	2.3						
52		3.5	1.9						
54		3.0							
56		2.6							
组合 code	000000	211111	221111	222111	222211	222221			
倍率	1	1	1	1	1	1			
吊钩重量			1.3						

	15.3-69.9m	9.6m×9.6m	360°	80t	24m	40°			
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m			
20									
22	9.9								
24	9.5								
26	9.1								
28	8.7								
30	8.3	6.4	6.4						
32	8.1	6.1	6.2	5.8					
34	8.0	5.9	6.0	5.1	4.0				
36		5.6	5.7	4.5	3.4				
38		5.5	5.1	3.8	2.9				
40		5.2	4.5	3.2	2.4				
42		5.0	4.0	2.8	2.0				
44		4.9	3.5	2.3					
46		4.5	3.0	1.9					
48		4.1	2.5						
50		3.6	2.2						
52		3.2	1.7						
54		2.8							
56		2.4							
58		1.9							
60		1.6							
组合 code	000000	211111	221111	222111	222211	222221			
倍率	1	1	1	1	1	1			
吊钩重量			1.3						

起重性能表

Lifting capacities

T 15.3~69.9m


	15.3-69.9m	9.6m×9.6m	360°	80t	30m	40°	
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m	69.9+2.5 m	
26	30 m 7.2						26
28		30 m 6.8					28
30			30 m 6.4				30
32				30 m 4.7			32
34					30 m 4.6		34
36						30 m 4.4	36
38							38
40						30 m 3.7	40
42							42
44							44
46							46
48							48
50							50
52							52
54							54
56							56
58							58
60							60
组合 code	000000	211111	221111	222111	222211	222221	组合 code
倍率	1	1	1	1	1	1	倍率
吊钩重量				1.3			吊钩重量

	15.3-69.9m	9.6m×9.6m	360°	80t	30m	40°	
	15.3+2.5 m	50+2.5 m	55+2.5 m	59.9+2.5 m	64.9+2.5 m		
30	36 m 36 m						30
32		36 m 5.3					32
34			36 m 4.9				34
36				36 m 4.7			36
38					36 m 4.6		38
40						36 m 4.4	40
42							42
44							44
46							46
48							48
50							50
52							52
54							54
56							56
58							58
组合 code	000000	211111	221111	222111	222211	222221	组合 code
倍率	1	1	1	1	1	1	倍率
吊钩重量				1.3			吊钩重量

起升高度曲线图

Lifting height chart

固定副臂+超起
Fixed Jib + Super lifting device

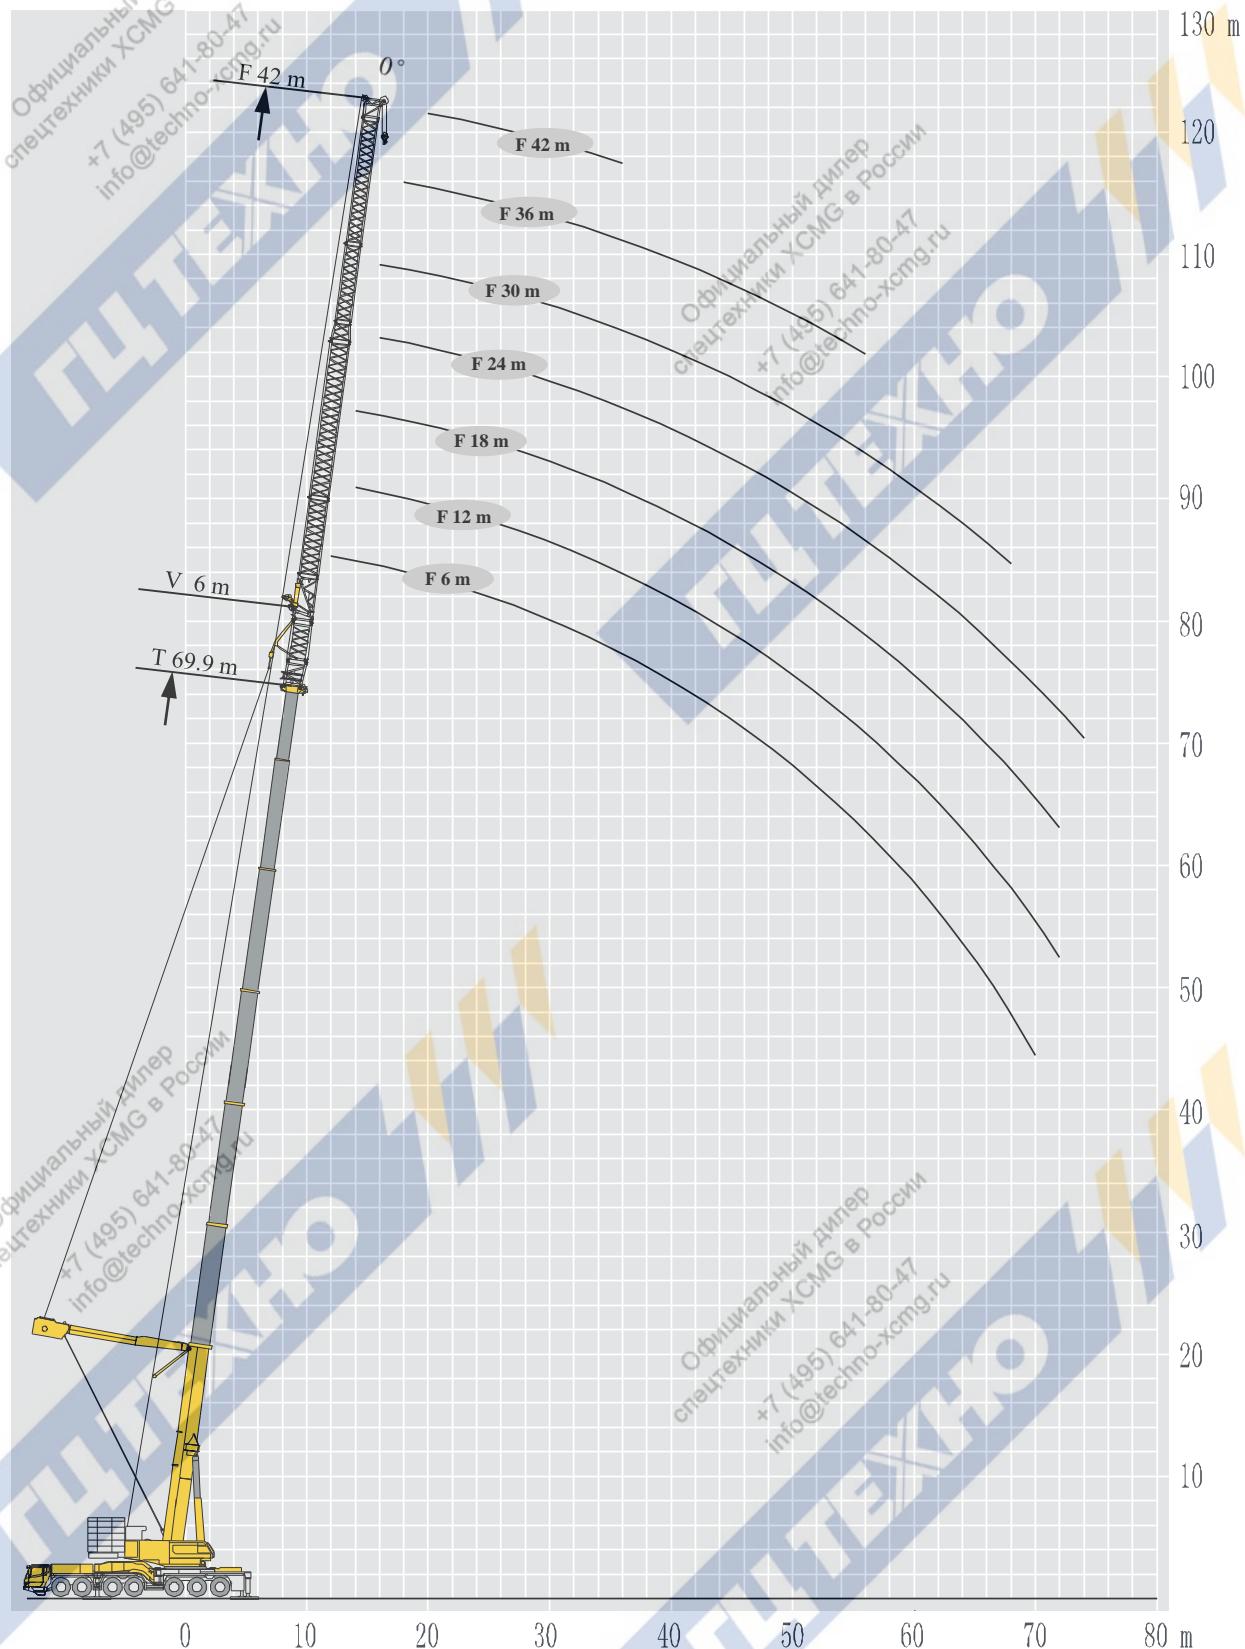

起重性能表

Lifting capacities

T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	6m	0°	SL					
	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	69.9+6 m	69.9+6 m	
9	74.2	72.8										9
10	69.8	68.4	65.3	63.8								10
11	65.7	64.1	61.6	60.5	56.5	58.3	57.6	51.8	52.8			11
12	62.0	60.1	57.9	57.2	53.5	55.4	54.3	49.6	50.7	45.1	47.4	12
13	58.4	56.6	54.9	53.8	50.8	52.5	51.3	47.5	48.5	43.3	45.2	13
14	55.2	53.5	52.0	50.8	48.2	49.7	48.7	45.3	46.3	41.5	42.9	14
16	49.5	47.7	47.1	45.8	43.5	44.7	44.0	41.1	41.9	38.0	38.9	16
18	45.0	42.9	42.6	41.3	39.5	40.7	39.7	37.5	38.2	34.9	35.6	18
20	41.0	38.8	38.8	37.4	35.9	37.2	36.1	34.3	35.0	32.2	32.7	20
22	37.6	35.4	35.3	33.9	32.8	33.9	32.9	31.0	31.4	27.7	28.2	22
24	34.3	31.8	32.2	29.5	28.9	29.9	29.1	27.3	27.5	25.8	26.0	24
26	31.3	28.0	28.3	27.0	26.2	27.0	26.2	25.2	25.5	23.9	24.1	26
28	28.0	25.7	26.2	24.9	24.2	25.0	24.1	23.4	23.7	22.3	22.3	28
30	26.1	23.8	24.3	23.0	22.6	23.1	22.3	21.9	22.0	20.8	20.8	30
32	24.2	22.0	22.8	21.2	21.0	21.4	20.7	20.4	20.5	19.4	19.5	32
34	22.7	20.5	21.3	19.9	19.6	20.2	19.3	19.1	19.1	18.3	18.1	34
36	20.7	19.1	19.9	18.3	18.3	18.7	18.0	17.8	17.9	17.1	16.9	36
38	19.1	17.7	18.5	17.2	17.1	17.5	16.7	16.6	16.6	16.0	15.8	38
40	17.6	16.1	17.4	16.0	15.9	16.3	15.6	15.6	15.5	15.0	14.8	40
42	16.1	14.6	16.1	14.8	14.9	15.3	14.6	14.6	14.5	14.0	13.8	42
44	14.7	12.8	14.5	13.2	13.9	14.0	13.6	13.7	13.5	13.2	13.0	44
46	13.1	11.2	13.0	11.6	13.0	12.4	12.0	12.9	12.6	12.4	12.2	46
48	11.6	9.8	11.6	10.1	11.6	10.9	10.6	12.1	11.1	11.6	11.4	48
50	10.3	8.4	10.2	8.8	10.3	9.6	9.3	10.7	9.8	11.0	10.1	50
52	9.0	7.2	9.0	7.6	9.0	8.4	8.0	9.5	8.6	9.9	8.9	52
54	7.7	6.0	7.9	6.4	7.9	7.3	6.9	8.4	7.5	8.8	7.8	54
56			6.8	5.4	6.9	6.2	5.9	7.4	6.4	7.8	6.7	56
58			5.9	4.4	5.9	5.3	4.9	6.4	5.5	6.8	5.8	58
60			4.4	3.2	5.0	4.4	4.0	5.5	4.6	5.9	4.9	60
62					4.2	3.5	3.2	4.7	3.7	5.1	4.1	62
64					3.4	2.7	2.4	3.9	3.0	4.3	3.3	64
66								3.1	2.2	3.6	2.6	66
68								2.4	1.5	2.9	1.9	68
70										2.2	1.2	70
72										1.6		72
组合 code	121111	222100	122111	222200	122220	222111	222210	122221	222211	122222	222221	组合 code
倍率	7	7	6	6	6	6	6	5	5	5	5	倍率
吊钩重量						1.9						吊钩重量

起重性能表

Lifting capacities

T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	12m	0°	SL									
	50+6 m	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	69.9+6 m					
	12 m	12 m	12 m	12 m	12 m	12 m	12 m	12 m	12 m	12 m	12 m	12 m	12 m	12 m	12 m	
10	60.8	61.8	61.3													10
11	57.5	58.4	58.0	55.1	54.8											11
12	54.1	55.1	54.6	52.1	51.8	48.1	49.3	48.9	42.8	45.8						12
13	51.0	52.1	51.6	49.4	49.0	45.9	47.1	46.7	41.3	43.9	36.3	43.0				13
14	48.3	49.1	49.0	47.0	46.4	43.7	44.9	44.5	39.9	42.0	35.5	42.0				14
16	43.4	44.6	43.6	42.2	41.8	39.5	40.6	40.1	36.9	38.3	33.7	39.1				16
18	39.5	40.2	39.4	38.5	38.0	35.9	37.0	36.5	33.8	34.9	31.9	34.5				18
20	35.7	36.8	35.9	35.2	34.5	32.8	33.7	33.2	28.7	31.9	29.5	30.4				20
22	32.5	33.7	32.5	32.2	30.1	29.4	30.1	29.7	26.6	27.1	24.7	25.3				22
24	28.2	30.8	28.1	28.2	27.1	26.0	26.6	26.1	24.5	25.1	22.8	23.5				24
26	25.8	27.1	25.8	25.7	24.9	23.9	24.5	24.0	22.8	23.2	21.2	21.7				26
28	23.9	25.0	23.8	23.7	22.9	22.2	22.8	22.2	21.3	21.7	19.7	20.3				28
30	22.4	23.3	21.9	22.1	21.3	20.6	21.2	20.7	19.8	20.1	18.5	19.0				30
32	20.8	21.8	20.4	20.7	19.7	19.2	19.8	19.2	18.4	18.8	17.3	17.6				32
34	19.5	20.3	19.0	19.3	18.3	17.9	18.5	17.9	17.3	17.4	16.2	16.4				34
36	18.1	19.2	17.6	18.0	17.0	16.8	17.2	16.6	16.1	16.3	15.2	15.4				36
38	17.0	17.8	16.3	16.8	15.8	15.6	16.0	15.4	15.1	15.1	14.2	14.4				38
40	15.8	16.7	15.1	15.8	14.7	14.5	15.0	14.3	14.2	14.1	13.4	13.4				40
42	14.8	15.7	14.2	14.8	13.8	13.6	14.0	13.4	13.2	13.2	12.5	12.5				42
44	13.8	14.8	13.2	13.8	12.8	12.7	13.1	12.5	12.4	12.4	11.7	11.8				44
46	12.9	13.9	12.2	13.0	12.0	11.9	12.2	11.7	11.6	11.6	11.0	11.0				46
48	12.1	12.4	10.8	12.2	10.9	11.1	11.4	10.9	10.9	10.8	10.5	10.3				48
50	11.2	11.1	9.4	10.9	9.6	10.5	10.2	9.9	10.3	10.2	9.8	9.7				50
52	10.0	9.9	8.2	9.7	8.4	9.6	9.0	8.7	9.7	9.1	9.2	9.1				52
54	8.8	8.7	7.1	8.6	7.3	8.5	7.9	7.6	8.8	8.0	8.6	8.2				54
56	7.8	7.7	6.0	7.5	6.2	7.5	6.9	6.5	7.8	6.9	8.1	7.1				56
58	6.8	6.7	5.0	6.6	5.3	6.5	5.9	5.6	6.8	6.0	7.1	6.2				58
60	5.6	5.5	4.1	5.7	4.4	5.6	5.0	4.7	5.9	5.1	6.2	5.3				60
62				4.8	3.5	4.8	4.2	3.8	5.1	4.3	5.4	4.5				62
64				4.0	2.7	4.0	3.4	3.1	4.3	3.5	4.6	3.7				64
66						3.2	2.6	2.3	3.6	2.7	3.9	3.0				66
68						2.5	2.0	1.6	2.9	2.1	3.2	2.3				68
70									2.3	1.4	2.6	1.6				70
72										1.6	2.0	1.0				72
74										1.1	1.4					74
组合 code	022210	121111	222100	122111	222200	122220	222111	222210	122221	222211	122222	222221				组合 code
倍率	7	7	6	6	6	6	6	6	5	5	5	5				倍率
吊钩重量																吊钩重量

1.9

起重性能表

Lifting capacities

T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	18m	0°	SL							
	50+6 m	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	69.9+6 m	69.9+6 m	69.9+6 m	
	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m
11	46.2	46.8	47.6											11
12	44.8	45.0	45.7	44.6	45.3	42.2	43.1	42.8						12
13	43.4	43.1	43.9	43.2	43.9	40.7	41.6	41.3	34.0	34.8				13
14	41.9	41.3	42.1	41.7	42.5	39.2	40.1	39.9	32.9	33.7	26.1	29.6		14
16	39.0	38.7	39.2	38.9	38.6	36.3	37.2	36.9	30.7	31.5	24.9	28.2		16
18	36.4	36.3	36.7	35.3	35.0	33.1	33.8	33.8	28.5	29.3	23.7	26.8		18
20	33.2	33.5	33.3	31.4	31.3	28.2	31.2	28.5	26.3	27.1	22.5	25.0		20
22	29.1	29.5	29.1	27.6	27.1	25.9	26.5	26.2	24.3	25.0	21.3	23.1		22
24	26.1	26.6	26.0	25.4	25.1	24.0	24.5	24.3	22.5	23.1	20.0	21.5		24
26	24.1	24.6	24.0	23.6	23.2	22.3	22.8	22.4	20.9	21.4	19.0	20.0		26
28	22.4	23.0	22.2	22.0	21.4	20.6	21.0	20.7	19.6	20.0	17.9	18.6		28
30	20.9	21.4	20.6	20.4	19.9	19.3	19.7	19.3	18.1	18.7	16.7	17.4		30
32	19.5	20.0	19.2	19.1	18.4	17.9	18.4	18.0	17.0	17.3	15.7	16.3		32
34	18.1	18.7	17.8	17.9	17.1	16.5	17.0	16.6	15.9	16.1	14.7	15.2		34
36	16.9	17.5	16.4	16.7	16.0	15.6	15.9	15.5	14.8	15.1	13.7	14.2		36
38	15.7	16.3	15.4	15.6	14.8	14.6	14.9	14.5	13.9	14.0	12.9	13.2		38
40	14.7	15.3	14.2	14.5	13.7	13.6	13.9	13.5	13.0	13.1	12.1	12.4		40
42	13.9	14.5	13.2	13.6	12.8	12.7	13.0	12.6	12.2	12.4	11.3	11.6		42
44	12.9	13.5	12.4	12.8	12.0	11.9	12.2	11.8	11.4	11.6	10.6	10.8		44
46	12.1	12.7	11.6	12.1	11.2	11.1	11.4	11.0	10.7	10.8	9.9	10.2		46
48	11.3	11.9	10.8	11.3	10.5	10.4	10.7	10.2	10.1	10.1	9.3	9.5		48
50	10.7	11.3	10.2	10.6	9.8	9.8	10.0	9.6	9.4	9.5	8.7	8.9		50
52	10.1	10.6	9.0	10.0	9.1	9.2	9.4	8.9	8.8	8.8	8.2	8.3		52
54	9.5	9.4	7.9	9.2	8.0	8.6	8.4	8.2	8.2	8.2	7.7	7.8		54
56	8.5	8.4	6.9	8.1	6.9	8.0	7.4	7.1	7.8	7.4	7.3	7.3		56
58	7.5	7.4	5.9	7.2	6.0	7.0	6.4	6.2	7.2	6.4	6.8	6.6		58
60	6.6	6.5	5.0	6.3	5.1	6.1	5.6	5.3	6.3	5.5	6.4	5.7		60
62	5.8	5.7	4.1	5.4	4.2	5.3	4.7	4.4	5.5	4.7	5.7	4.8		62
64	5.0	4.9	3.3	4.6	3.4	4.5	3.9	3.6	4.7	3.9	4.9	4.1		64
66	4.0	3.8	2.5	3.9	2.7	3.7	3.2	2.9	4.0	3.2	4.2	3.3		66
68			3.2	2.0	3.1	2.5	2.2	3.3	2.5	3.5	2.6	2.6		68
70			2.5	1.3	2.4	1.9	1.6	2.7	1.9	2.9	2.0	2.0		70
74					1.8	1.2	1.0	2.0	1.3	2.3	1.4	1.4		74
76					1.2				1.5		1.7			76
组合 code	022210	121111	222100	122111	222200	122220	222111	222210	122221	222211	122222	222221		组合 code
倍率	6	6	6	5	5	5	5	5	4	4	4	4		倍率
吊钩重 量														吊钩重 量

1.9

起重性能表

Lifting capacities


T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	24m	0°	SL				
	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	64.9+6 m	69.9+6 m	69.9+6 m		
	24 m	24 m	24 m	24 m	24 m	24 m	24 m	24 m	24 m		
12	36.4	36.1								12	
13	34.9	34.9	32.4	32.8	31.6	31.8				13	
14	33.4	33.6	31.5	31.9	30.9	31.2	13.7	30.0		14	
16	29.8	30.9	29.7	30.1	29.5	29.8	17.1	28.7	20.8	16	
18	28.0	28.1	27.9	28.4	28.1	28.4	20.6	27.0	19.8	18	
20	26.1	26.3	26.4	26.8	26.5	26.5	24.0	24.8	18.9	20	
22	24.6	24.8	24.9	25.3	24.5	24.4	22.3	23.1	18.0	22	
24	23.1	23.5	23.5	23.5	22.7	22.6	20.7	21.4	17.1	24	
26	22.2	22.2	21.7	21.7	21.1	21.0	19.3	20.0	16.2	26	
28	21.0	20.8	20.4	20.1	19.7	19.5	18.0	18.6	15.4	28	
30	19.5	19.3	19.0	18.6	18.3	18.2	16.7	17.3	14.5	30	
32	18.2	18.0	17.7	17.4	17.0	16.9	15.7	16.1	13.8	32	
34	16.9	16.7	16.5	16.1	15.8	15.7	14.7	15.0	13.1	34	
36	15.9	15.5	15.4	15.1	14.8	14.7	13.7	14.1	12.4	36	
38	14.8	14.4	14.4	13.9	13.8	13.7	12.8	13.2	11.6	38	
40	13.8	13.4	13.5	12.9	12.9	12.7	12.0	12.4	10.9	40	
42	12.9	12.5	12.7	12.1	12.1	11.8	11.3	11.5	10.2	42	
44	12.1	11.7	11.9	11.3	11.3	11.0	10.5	10.7	9.5	44	
46	11.3	11.0	11.1	10.6	10.5	10.4	9.9	10.1	8.8	46	
48	10.6	10.3	10.5	9.9	9.9	9.6	9.3	9.4	8.3	48	
50	10.1	9.5	9.9	9.2	9.3	9.0	8.7	8.8	7.8	50	
52	9.5	8.9	9.3	8.6	8.7	8.4	8.1	8.2	7.3	52	
54	8.9	8.3	8.7	8.0	8.1	7.8	7.5	7.7	6.8	54	
56	8.3	7.4	8.2	7.4	7.5	7.3	7.1	7.1	6.4	56	
58	7.7	6.4	7.5	6.4	6.8	6.5	6.6	6.7	6.0	58	
60	7.0	5.5	6.6	5.5	5.9	5.6	6.2	5.8	5.6	60	
62	6.2	4.7	5.8	4.7	5.1	4.8	5.7	5.0	5.2	62	
64	5.4	3.9	5.0	3.9	4.3	4.0	4.9	4.2	4.8	64	
66	4.7	3.2	4.3	3.2	3.5	3.3	4.2	3.5	4.3	66	
68	4.0	2.5	3.6	2.5	2.9	2.6	3.5	2.8	3.6	68	
70	3.3	1.8	2.9	1.8	2.2	1.9	2.9	2.1	3.0	70	
72		2.3	1.2		1.6	1.3	2.3	1.5	2.4	72	
74		1.7			1.0		1.7	1.0	1.8	74	
76					0.5		1.1		1.3	76	
组合 code	022210	222100	122111	222200	222111	222210	122221	222211	122222	222221	组合 code
倍率	+4	4	3	3	3	3	2.1	3	2	2	倍率
吊钩重 量		1.9					1.3				吊钩重 量

起重性能表

Lifting capacities

T 50~69.9m

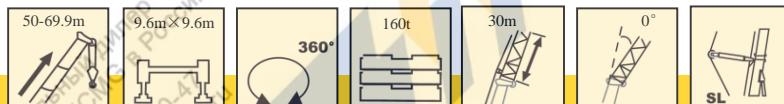


	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	69.9+6 m	69.9+6 m
	30 m	30 m	30 m	30 m	30 m	30 m	30 m				
13	27.4	27.5									13
14	26.5	26.6	25.7	26.1	24.1	25.3	25.0				14
16	24.6	24.8	24.3	24.6	23.1	24.1	24.0	22.3	22.8	16.4	20.1
18	22.8	23.1	22.8	23.2	22.1	22.8	22.9	21.4	21.9	15.8	19.3
20	21.4	21.6	21.4	21.8	21.0	21.6	21.9	20.5	21.0	15.1	18.4
22	20.1	20.4	20.3	20.6	20.0	20.6	20.7	19.6	20.1	14.5	17.6
24	19.0	19.3	19.3	19.5	19.0	19.6	19.7	18.7	19.2	13.9	16.8
26	18.0	18.2	18.3	18.6	18.1	18.6	18.7	17.8	18.4	13.3	16.0
28	17.1	17.2	17.4	17.6	17.2	17.7	17.8	16.6	17.2	12.6	15.2
30	16.2	16.3	16.5	16.7	16.4	16.9	16.9	15.5	16.0	12.0	14.3
32	15.5	15.6	15.8	16.0	15.3	15.8	15.8	14.5	15.0	11.4	13.6
34	14.8	14.9	15.1	15.1	14.3	14.8	14.7	13.5	14.0	10.9	13.0
36	14.1	14.2	14.4	14.0	13.3	13.8	13.7	12.7	13.0	10.2	12.1
38	13.5	13.6	13.4	13.0	12.5	12.9	12.7	11.8	12.3	9.7	11.3
40	12.9	12.7	12.5	12.1	11.7	12.1	11.9	11.1	11.5	9.2	10.6
42	12.1	11.9	11.7	11.4	10.9	11.3	11.1	10.3	10.7	8.8	9.8
44	11.3	11.0	11.0	10.6	10.3	10.5	10.3	9.7	10.0	8.4	9.2
46	10.5	10.3	10.4	9.9	9.7	9.9	9.7	9.1	9.3	7.7	8.6
48	9.9	9.7	9.7	9.3	9.1	9.2	9.0	8.5	8.7	7.0	8.0
50	9.4	9.0	9.1	8.6	8.5	8.6	8.4	7.9	8.1	6.3	7.5
52	8.8	8.4	8.5	8.0	8.0	8.0	7.8	7.4	7.5	5.5	6.9
54	8.2	7.8	8.0	7.4	7.6	7.5	7.2	6.9	7.0	5.0	6.2
56	7.7	7.2	7.5	6.9	7.1	7.0	6.7	6.5	6.5	4.4	5.5
58	7.1	6.7	7.0	6.4	6.6	6.5	6.3	6.0	6.1	3.8	4.9
60	6.7	6.0	6.6	5.9	6.2	6.1	5.8	5.6	5.7	3.3	4.2
62	6.3	5.2	6.1	5.1	5.8	5.4	5.1	5.2	5.2	2.7	3.6
64	5.8	4.4	5.3	4.3	5.0	4.6	4.3	4.9	4.4	2.3	3.1
66	5.0	3.7	4.6	3.6	4.3	3.8	3.6	4.4	3.7	2.5	66
68	4.4	3.0	3.9	2.9	3.6	3.2	2.9	3.7	3.0	2.0	68
70	3.7	2.3	3.3	2.2	2.9	2.5	2.3	3.1	2.4		70
72	3.1	1.7	2.6	1.6	2.3	1.9	1.6	2.5	1.8		72
74	2.5	1.1	2.1	1.0	1.8	1.3	1.1	1.9	1.2		74
76	1.9	0.9	1.5		1.2			1.3			76
78	1.0										78
组合 code	022210	222100	122111	222200	221112	222111	222210	122221	222211	122222	222221
倍率	3	3	3	3	3	3	3	2	2	2	2
吊钩重 量						1.3					

起重性能表

Lifting capacities

T 50~69.9m

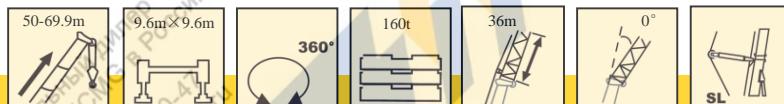


	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	69.9+6 m	69.9+6 m
	36 m	36 m	36 m	36 m	36 m	36 m	36 m				
14	21.9	22.5									14
16	20.6	21.0	20.2	20.6	18.9	19.7	20.0	17.6	18.6		16
18	19.3	19.5	19.1	19.5	18.1	18.8	19.1	17.0	17.9	7.7	18.4
20	18.2	18.3	18.0	18.4	17.3	17.9	18.2	16.4	17.2	7.6	11.9
22	17.0	17.1	17.1	17.3	16.5	17.0	17.3	15.8	16.5	7.4	11.4
24	16.0	16.1	16.1	16.4	15.7	16.1	16.4	15.2	15.8	7.3	10.9
26	15.1	15.2	15.2	15.4	14.9	15.3	15.5	14.5	15.1	7.1	10.4
28	14.2	14.4	14.4	14.6	14.2	14.6	14.7	13.9	14.4	6.9	9.9
30	13.5	13.6	13.7	13.9	13.5	13.9	14.0	13.3	13.7	6.4	9.3
32	12.8	12.9	13.1	13.2	12.9	13.3	13.4	12.7	13.1	5.6	8.9
34	12.2	12.3	12.4	12.6	12.3	12.7	12.8	12.2	12.6	4.7	8.4
36	11.7	11.7	11.9	12.0	11.8	12.1	12.2	11.7	12.1	4.0	7.7
38	11.1	11.2	11.4	11.5	11.3	11.6	11.7	11.1	11.5	3.4	6.8
40	10.6	10.7	10.9	11.0	10.9	11.2	11.3	10.4	10.7	2.7	6.0
42	10.2	10.3	10.5	10.6	10.3	10.7	10.5	9.7	10.1	2.3	5.3
44	9.8	9.9	10.1	10.1	9.6	10.0	9.9	9.1	9.4	1.6	4.6
46	9.4	9.5	9.7	9.4	9.0	9.3	9.2	8.5	8.7	1.1	3.9
48	9.0	9.0	9.1	8.7	8.4	8.7	8.5	7.9	8.1		3.2
50	8.7	8.5	8.5	8.1	7.9	8.1	7.9	7.4	7.6		2.7
52	8.2	7.9	8.0	7.5	7.4	7.5	7.3	6.8	7.1		2.1
54	7.7	7.3	7.4	7.0	6.9	7.0	6.9	6.4	6.6		1.7
56	7.2	6.8	7.0	6.5	6.5	6.6	6.4	6.0	6.2		1.2
58	6.7	6.3	6.5	6.0	6.0	6.1	5.9	5.5	5.7		58
60	6.3	5.9	6.1	5.6	5.6	5.6	5.4	5.2	5.3		60
62	5.8	5.4	5.7	5.1	5.2	5.2	5.0	4.8	4.9		62
64	5.4	4.7	5.2	4.5	4.9	4.7	4.5	4.2	4.5		64
66	5.0	3.9	4.8	3.8	4.4	4.0	3.7	3.7	3.8		66
68	4.5	3.3	4.1	3.1	3.7	3.3	3.1	3.3	3.1		68
70	3.9	2.6	3.4	2.4	3.1	2.7	2.4	2.6	2.5		70
72	3.3	2.0	2.8	1.8	2.4	2.0	1.8	2.2	1.9		72
74	2.7	1.4	2.2	1.3	1.9	1.5	1.2	1.7	1.3		74
76	2.1		1.7		1.3						76
78	1.6		1.2								78
80	1.1										80
组合 code	022210	222100	122111	222200	221112	222111	222210	122221	222211	122222	222221
倍率	2	2	2	2	2	2	2	2	2	1	1
吊钩重 量						1.3					

起重性能表

Lifting capacities

T 50~69.9m

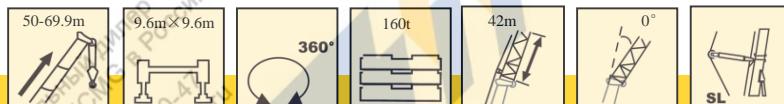


	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	69.9+6 m	69.9+6 m
	42 m	42 m	42 m	42 m	42 m	42 m	42 m				
16	17.5	18.0	17.1	17.3	15.6	15.8	17.5				16
18	16.4	16.7	16.2	16.4	14.9	15.2	16.6	13.5	14.5		18
20	15.3	15.4	15.3	15.5	14.3	14.6	15.7	13.1	14.0	5.9	6.8
22	14.5	14.6	14.4	14.6	13.7	14.0	14.7	12.6	13.4	5.2	6.1
24	13.5	13.7	13.5	13.6	13.0	13.4	13.8	12.2	12.9	4.4	5.4
26	12.8	12.9	12.8	12.9	12.4	12.8	12.9	11.8	12.4	3.6	4.8
28	12.2	12.3	12.1	12.2	11.8	12.2	12.3	11.3	11.8	2.8	4.1
30	11.5	11.6	11.5	11.6	11.2	11.5	11.7	10.9	11.3	2.0	3.5
32	10.8	10.9	10.9	11.0	10.7	11.1	11.2	10.4	10.9	1.2	2.7
34	10.3	10.4	10.4	10.5	10.3	10.5	10.6	9.9	10.3		1.8
36	9.9	10.0	10.0	10.1	9.9	10.2	10.2	9.4	10.0		1.1
38	9.4	9.4	9.5	9.7	9.4	9.8	9.8	9.0	9.6		38
40	9.0	9.0	9.1	9.2	9.1	9.4	9.4	8.3	9.3		40
42	8.5	8.6	8.8	8.8	8.7	8.9	9.0	8.1	8.9		42
44	8.1	8.2	8.4	8.4	8.3	8.6	8.6	7.2	8.5		44
46	7.8	7.9	8.0	8.1	8.0	8.2	8.3	6.2	8.2		46
48	7.4	7.5	7.7	7.7	7.7	7.9	7.9	5.3	7.8		48
50	7.2	7.2	7.4	7.5	7.4	7.6	7.6	4.6	7.3		50
52	7.0	6.9	7.1	7.2	6.9	7.2	7.1	3.9	6.5		52
54	6.6	6.6	6.8	6.8	6.5	6.7	6.6	3.3	5.9		54
56	6.3	6.3	6.5	6.3	6.1	6.2	6.1	2.7	5.0		56
58	6.1	6.0	6.1	5.8	5.7	5.8	5.7	2.0	4.4		58
60	5.8	5.6	5.7	5.4	5.3	5.4	5.3	1.6	3.6		60
62	5.5	5.1	5.3	5.0	4.9	5.0	4.9	1.2	2.9		62
64	5.2	4.7	4.9	4.5	4.5	4.6	4.5		2.3		64
66	4.7	4.2	4.5	4.0	4.2	4.1	3.9		1.8		66
68	4.3	3.5	4.2	3.3	3.8	3.4	3.2		1.3		68
70	4.0	2.9	3.6	2.7	3.2	2.8	2.6				70
72	3.5	2.3	3.0	2.0	2.6	2.2	2.0				72
74	2.9	1.7	2.4	1.5	2.0	1.6	1.4				74
76	2.3	1.1	1.8		1.4	1.1					76
78	1.8		1.3								78
80	1.3										80
组合 code	022210	222100	122111	222200	221112	222111	222210	122221	222211	122222	222221
倍率	2	2	2	2	2	2	2	1	1	1	1
吊钩重量						1.3					

起升高度曲线图

Lifting height chart

固定副臂+超起
Fixed Jib + Super lifting device

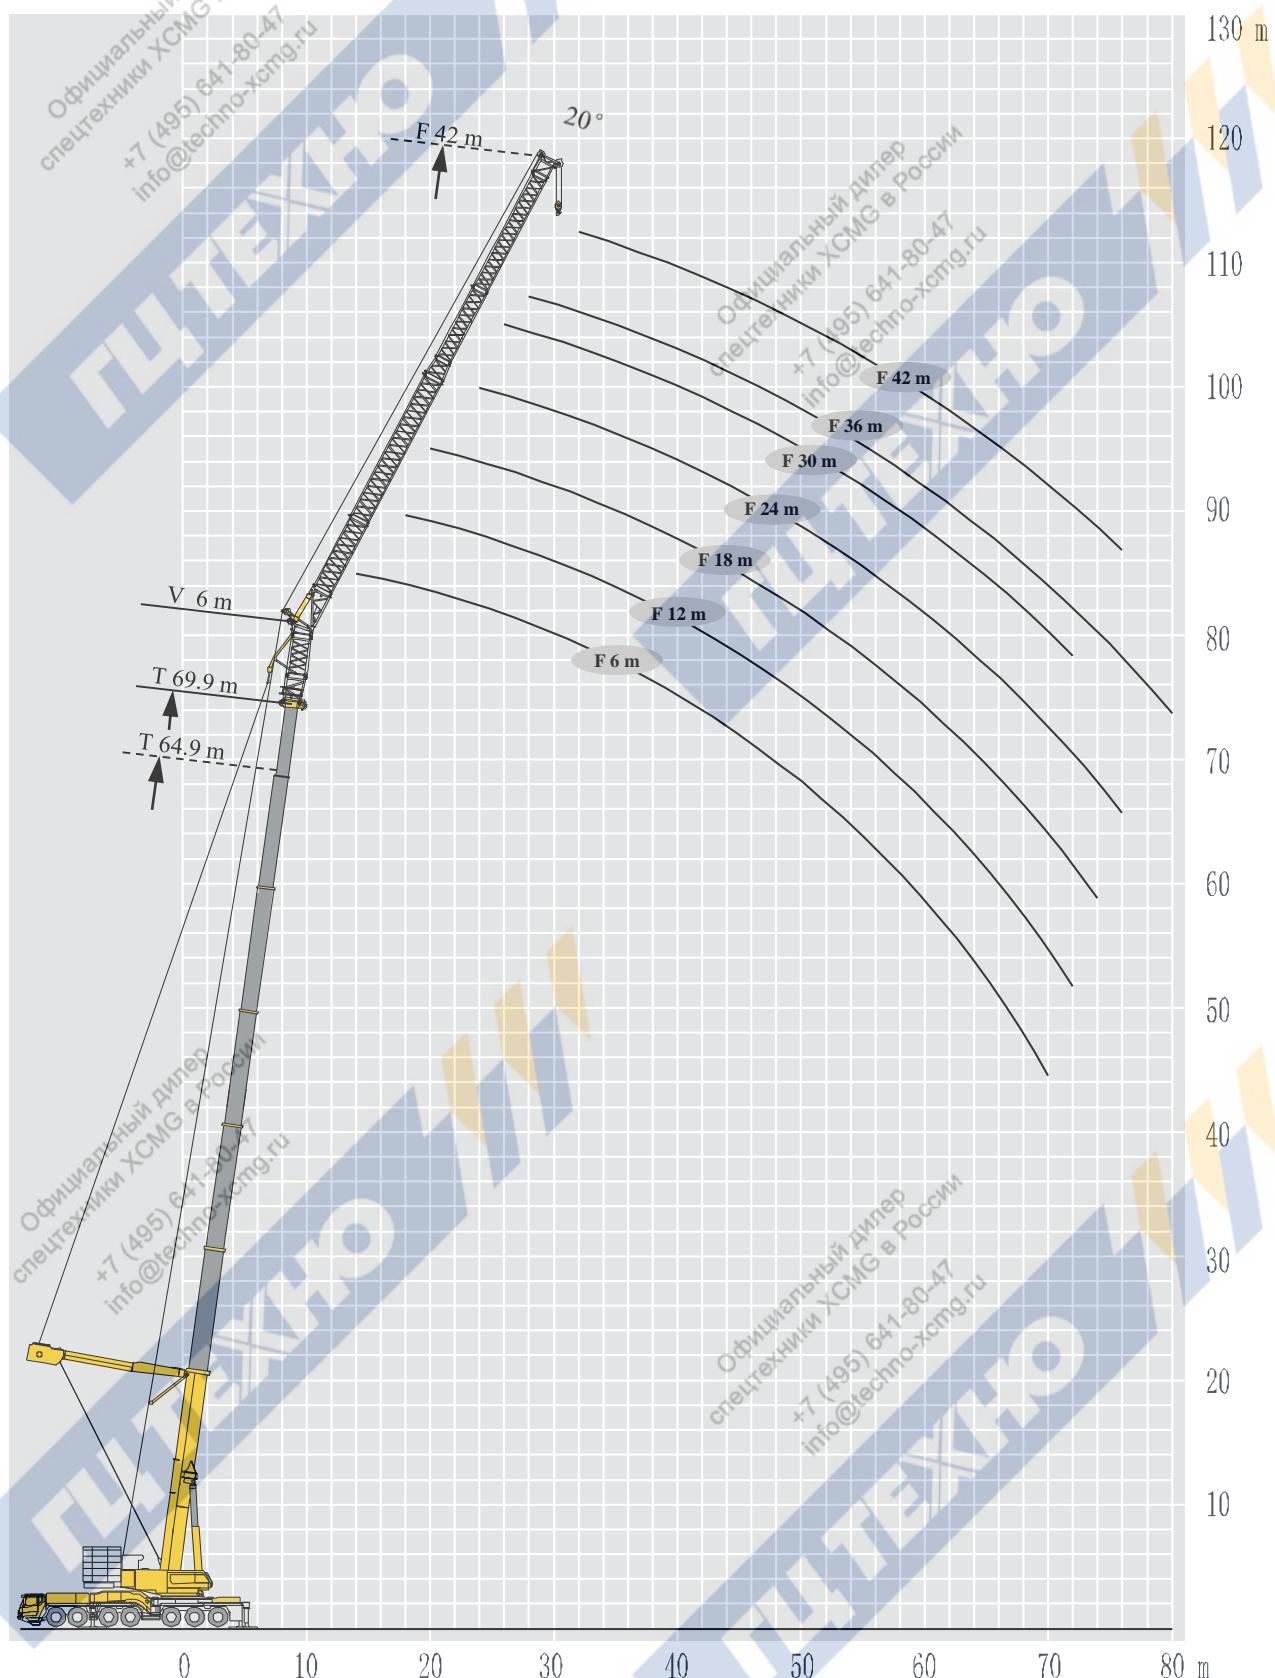

起重性能表

Lifting capacities

T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	6m	20°	SL					
	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	69.9+6 m	69.9+6 m	
	6 m	6 m	6 m	6 m	6 m	6 m	6 m	6 m	6 m	6 m	6 m	
11	51.4	51.6										11
12	50.3	50.6	50.9	50.0								12
13	49.2	49.5	49.8	49.3	46.5	47.6	47.9	43.3	44.9			13
14	48.1	48.4	48.2	47.8	44.7	45.7	45.7	41.6	43.0	36.1	39.2	14
16	45.8	45.0	43.4	42.9	40.9	41.8	41.3	38.2	39.3	34.3	36.3	16
18	41.8	40.6	40.0	39.1	37.4	38.2	37.9	35.2	36.1	32.4	33.3	18
20	38.4	37.2	36.6	35.7	34.3	35.1	34.4	31.6	33.1	28.1	28.9	20
22	35.1	33.8	33.5	32.6	30.1	32.2	30.4	28.1	29.8	26.2	26.7	22
24	32.6	30.7	29.2	28.4	27.3	28.5	27.5	26.1	26.5	24.3	24.8	24
26	30.0	27.4	27.4	26.2	25.3	26.0	25.5	24.2	24.6	22.8	23.1	26
28	27.0	25.2	25.4	24.3	23.5	24.2	23.6	22.6	22.9	21.3	21.6	28
30	25.1	23.3	23.5	22.4	21.9	22.5	21.8	21.2	21.4	19.9	20.3	30
32	23.4	21.6	22.0	20.8	20.5	21.0	20.3	19.8	19.9	18.8	18.9	32
34	21.9	20.2	20.5	19.5	19.2	19.7	19.0	18.6	18.6	17.6	17.6	34
36	20.6	18.8	19.3	18.1	18.0	18.3	17.6	17.4	17.5	16.5	16.6	36
38	19.5	17.5	18.2	17.0	16.8	17.1	16.4	16.3	16.3	15.5	15.5	38
40	18.3	16.3	17.0	15.8	15.6	16.1	15.4	15.4	15.3	14.5	14.5	40
42	16.8	15.2	16.0	14.6	14.6	15.0	14.3	14.4	14.3	13.8	13.7	42
44	15.1	13.3	15.1	13.7	13.8	14.1	13.4	13.5	13.4	13.0	12.7	44
46	13.5	11.7	13.5	12.1	12.8	12.9	12.5	12.7	12.6	12.2	11.9	46
48	12.0	10.2	12.0	10.6	12.0	11.4	11.1	11.9	11.6	11.4	11.3	48
50	10.6	8.8	10.6	9.2	10.7	10.0	9.7	11.2	10.3	10.8	10.6	50
52	9.3	7.5	9.3	7.9	9.4	8.8	8.4	9.9	9.0	10.3	9.3	52
54	8.1	6.3	8.2	6.7	8.2	7.6	7.3	8.8	7.9	9.2	8.2	54
56	5.7	4.3	7.1	5.6	7.2	6.5	6.2	7.7	6.8	8.1	7.1	56
58			6.0	4.6	6.2	5.5	5.2	6.7	5.8	7.1	6.1	58
60			4.6	3.6	5.2	4.6	4.2	5.8	4.9	6.2	5.2	60
62				4.3	3.7	3.4	4.9	4.0	5.3	4.4	62	
64				3.5	2.9	2.5	4.1	3.2	4.5	3.5	64	
66							3.3	2.4	3.8	2.8	66	
68							2.6	1.7	3.1	2.1	68	
70									2.4	1.4	70	
72										1.7	72	
组合 code	121111	222100	122111	222200	122220	222111	222210	122221	222211	122222	222221	组合 code
倍率	5	5	4	4	4	4	4	4	4	3	4	倍率
吊钩重 量						1.9						吊钩重 量

起重性能表

Lifting capacities

T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	12m	20°	SL								
	50+6 m	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	69.9+6 m	69.9+6 m	69.9+6 m		
14	33.6	33.7	34.1												14
16	32.5	32.4	32.8	32.5	32.8	32.7	32.9	29.7	31.5						16
18	31.4	31.2	31.5	31.4	31.7	31.6	31.8	28.0	29.4	23.8	25.9				18
20	30.3	30.2	30.4	30.5	30.7	29.5	30.1	30.0	26.3	27.3	22.6	24.8			20
22	28.8	29.1	28.8	28.1	28.2	26.3	26.9	26.8	24.6	25.2	21.4	23.4			22
24	26.7	26.9	26.5	25.8	25.7	24.3	24.9	24.7	22.9	23.5	20.2	21.9			24
26	24.7	25.0	24.6	24.0	23.7	22.6	23.2	22.9	21.3	22.0	19.3	20.5			26
28	23.0	23.5	22.9	22.4	22.0	21.2	21.6	21.3	20.0	20.5	18.5	19.1			28
30	21.5	22.0	21.1	20.9	20.5	19.8	20.2	19.9	18.7	19.2	17.3	18.0			30
32	20.1	20.5	19.8	19.7	19.2	18.5	19.0	18.6	17.5	18.0	16.2	16.8			32
34	18.7	19.5	18.4	18.5	17.8	17.4	17.7	17.3	16.5	16.7	15.3	15.8			34
36	17.6	18.3	17.3	17.4	16.6	16.2	16.5	16.1	15.4	15.7	14.4	14.8			36
38	16.4	17.2	16.1	16.2	15.4	15.1	15.6	15.1	14.5	14.8	13.6	13.9			38
40	15.4	16.2	14.9	15.2	14.4	14.2	14.6	14.1	13.7	13.8	12.8	13.1			40
42	14.5	15.2	14.0	14.4	13.4	13.3	13.6	13.2	12.9	13.0	12.1	12.3			42
44	13.7	14.3	13.0	13.4	12.6	12.5	12.8	12.3	12.1	12.1	11.4	11.5			44
46	12.7	13.5	12.2	12.6	11.8	11.7	12.0	11.5	11.3	11.4	10.7	10.8			46
48	12.0	12.8	11.4	11.9	11.0	11.0	11.2	10.8	10.7	10.6	10.2	10.2			48
50	11.3	11.9	10.3	11.3	10.4	10.4	10.6	10.2	10.1	10.0	9.6	9.5			50
52	10.6	10.6	9.0	10.5	9.3	9.8	9.9	9.5	9.6	9.4	9.0	8.9			52
54	9.5	9.3	7.7	9.3	8.0	9.2	8.7	8.4	9.0	8.8	8.4	8.3			54
56	8.3	8.2	6.6	8.2	6.9	8.2	7.6	7.3	8.4	7.8	8.0	7.9			56
58	7.3	7.1	5.5	7.1	5.9	7.1	6.6	6.3	7.5	6.7	7.5	7.0			58
60	6.2	6.1	4.5	6.2	4.9	6.2	5.6	5.3	6.6	5.8	6.9	6.0			60
62	4.4	4.2	3.0	5.2	4.0	5.3	4.7	4.4	5.7	4.9	6.0	5.1			62
64				4.4	3.1	4.4	3.9	3.6	4.9	4.0	5.2	4.3			64
66				3.4	2.2	3.6	3.1	2.7	4.1	3.3	4.4	3.5			66
68						2.9	2.3	2.0	3.3	2.5	3.7	2.8			68
70						2.1	1.6	1.2	2.6	1.8	3.0	2.1			70
72									2.0	1.1	2.3	1.4			72
74									1.3		1.7				74
76											1.1				76
组合 code	022210	121111	222100	122111	222200	122220	222111	222210	122221	222211	122222	222221			组合 code
倍率	3	3	3	3	3	3	3	3	3	3	2	2			倍率
吊钩重量															吊钩重量

1.9

起重性能表

Lifting capacities

T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	18m	20°	SL	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	69.9+6 m	69.9+6 m
	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m
18	22.1	22.1	22.1	22.2														18
20	21.2	21.1	21.4	21.4	21.1	21.3	21.4											20
22	20.6	20.6	20.7	20.8	20.8	20.9	20.9											22
24	20.1	20.1	20.2	20.4	20.5	20.4	20.5											24
26	19.4	19.4	19.7	19.8	20.0	20.0	20.1											26
28	18.8	18.8	19.0	19.2	19.4	19.5	19.5											28
30	18.1	18.0	18.4	18.6	18.2	18.6	18.5											30
32	17.4	17.4	17.9	17.8	17.0	17.4	17.3											32
34	16.9	17.0	17.0	16.6	16.0	16.2	16.1											34
36	16.4	16.0	15.9	15.5	15.0	15.3	15.2											36
38	15.4	15.0	14.9	14.5	14.1	14.3	14.2											38
40	14.4	14.0	14.0	13.6	13.3	13.4	13.2											40
42	13.5	13.0	13.1	12.7	12.4	12.7	12.4											42
44	12.7	12.2	12.4	11.9	11.6	11.9	11.6											44
46	11.9	11.4	11.7	11.1	10.9	11.1	10.9											46
48	11.2	10.7	11.0	10.4	10.3	10.4	10.2											48
50	10.6	10.1	10.4	9.8	9.7	9.8	9.6											50
52	10.0	9.5	9.8	9.2	9.1	9.3	9.0											52
54	9.4	8.9	9.3	8.5	8.5	8.7	8.4											54
56	8.8	7.9	8.7	7.9	8.0	8.1	7.8											56
58	8.3	6.9	8.2	7.0	7.5	7.6	7.2											58
60	7.4	5.8	7.2	6.0	7.0	6.6	6.3											60
62	6.4	4.9	6.3	5.1	6.2	5.7	5.4											62
64	5.5	4.0	5.4	4.2	5.3	4.8	4.5											64
66	4.7	3.1	4.5	3.4	4.5	4.0	3.7											66
68	3.2	1.8	3.8	2.6	3.7	3.2	2.9											68
70			3.0	1.8	3.0	2.5	2.2											70
72			2.3	1.1	2.3	1.8	1.5											72
74					1.6	1.1												74
76					1.0													76
78																		78
组合 code	022210	222100	122111	222200	122220	222111	222210	122221	222211	122222	222221							组合 code
倍率	2	2	2	2	2	2	2	2	2	2	2							倍率
吊钩重量																		吊钩重量

起重性能表

Lifting capacities

T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	24m	20°	SL				
	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	64.9+6 m	69.9+6 m	69.9+6 m		
20	16.5	16.5									20
22	15.9	15.9	15.9	16.0	15.7	15.7	15.3	15.5			22
24	15.4	15.4	15.4	15.5	15.3	15.3	14.9	15.1	12.2	14.4	24
26	14.8	14.9	14.8	14.9	14.9	15.0	14.6	14.8	11.8	14.1	26
28	14.3	14.4	14.4	14.5	14.5	14.6	14.2	14.4	11.5	13.7	28
30	13.9	13.9	14.0	14.2	14.1	14.2	13.8	14.0	11.1	13.4	30
32	13.5	13.6	13.6	13.7	13.7	13.8	13.5	13.7	10.7	13.0	32
34	13.1	13.2	13.3	13.3	13.4	13.4	13.1	13.4	10.3	12.6	34
36	12.8	12.8	12.9	12.9	13.0	13.0	12.8	13.0	9.3	12.1	36
38	12.4	12.4	12.5	12.6	12.7	12.8	12.2	12.7	9.2	11.5	38
40	12.0	12.1	12.2	12.3	12.4	12.5	11.5	11.9	9.2	10.8	40
42	11.7	11.8	11.9	11.9	11.8	11.7	10.9	11.2	9.1	10.2	42
44	11.4	11.4	11.5	11.2	11.0	10.9	10.2	10.5	8.8	9.5	44
46	11.1	10.8	10.9	10.6	10.4	10.3	9.6	9.9	8.4	9.0	46
48	10.5	10.2	10.2	9.9	9.8	9.6	9.0	9.3	8.1	8.5	48
50	9.9	9.6	9.7	9.3	9.2	9.0	8.5	8.7	7.6	8.0	50
52	9.3	9.0	9.1	8.7	8.6	8.4	8.0	8.2	7.2	7.4	52
54	8.8	8.4	8.6	8.1	8.1	7.9	7.5	7.7	6.7	6.9	54
56	8.2	7.8	8.1	7.5	7.6	7.3	7.1	7.2	6.3	6.5	56
58	7.8	7.3	7.6	7.0	7.1	6.9	6.7	6.7	5.9	6.1	58
60	7.3	6.8	7.2	6.5	6.7	6.4	6.2	6.3	5.6	5.7	60
62	6.8	5.9	6.7	6.0	6.2	6.0	5.8	5.9	5.2	5.2	62
64	6.4	5.0	6.2	5.1	5.6	5.3	5.4	5.5	4.8	4.9	64
66	5.5	4.1	5.3	4.3	4.7	4.5	5.1	4.8	4.5	4.5	66
68	4.7	3.3	4.5	3.5	4.0	3.7	4.7	4.0	4.2	4.1	68
70	4.0	2.5	3.8	2.7	3.2	3.0	3.9	3.3	3.9	3.4	70
72	3.2	1.8	3.1	2.0	2.5	2.3	3.2	2.6	3.5	2.7	72
74	2.1	0.8	2.4	1.3	1.8	1.6	2.6	1.9	2.8	2.0	74
76			1.7		1.2		2.0	1.3	2.2	1.4	76
78			1.1				1.4		1.6		78
80									1.1		80
组合 code	022210	222100	122111	222200	222111	222210	122221	222211	122222	222221	组合 code
倍率	2	2	2	2	2	2	2	2	1	2	倍率
吊钩重量											吊钩重量

1.3



起重性能表

Lifting capacities

T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	30m	20°	SL					
	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	69.9+6 m	69.9+6 m	
24	12.0	12.1	12.1	12.2								24
26	11.7	11.7	11.7	11.8	11.4	11.8	11.8	11.1	11.5	8.8	10.2	26
28	11.3	11.2	11.3	11.4	11.2	11.4	11.5	10.9	11.2	8.5	10.1	28
30	10.8	10.9	10.9	11.0	10.9	11.0	11.1	10.7	10.9	8.2	9.9	30
32	10.5	10.5	10.5	10.7	10.5	10.7	10.7	10.5	10.6	7.9	9.7	32
34	10.3	10.3	10.4	10.4	10.4	10.4	10.5	10.3	10.3	7.7	9.5	34
36	10.0	10.1	10.1	10.2	10.1	10.2	10.4	10.1	10.2	7.4	9.4	36
38	9.8	9.8	9.9	10.0	9.9	10.0	10.1	9.9	10.0	7.1	9.2	38
40	9.5	9.5	9.6	9.7	9.6	9.8	9.8	9.6	9.8	6.9	8.9	40
42	9.1	9.2	9.4	9.4	9.4	9.5	9.5	9.4	9.5	6.7	8.7	42
44	8.9	8.9	9.1	9.1	9.2	9.3	9.3	9.1	9.3	6.3	8.4	44
46	8.6	8.6	8.8	8.8	8.9	9.0	9.0	8.8	9.0	6.2	8.1	46
48	8.3	8.3	8.5	8.6	8.7	8.8	8.8	8.3	8.6	5.9	7.9	48
50	8.1	8.2	8.3	8.4	8.3	8.6	8.4	7.8	8.1	5.8	7.4	50
52	8.0	8.0	8.1	8.1	7.8	8.0	7.9	7.3	7.6	5.7	6.9	52
54	7.7	7.8	7.9	7.6	7.3	7.5	7.4	6.9	7.1	5.4	6.5	54
56	7.5	7.4	7.5	7.1	6.9	7.1	6.9	6.5	6.6	5.3	6.1	56
58	7.2	6.9	7.0	6.6	6.5	6.6	6.5	6.1	6.2	4.9	5.7	58
60	6.8	6.4	6.6	6.1	6.1	6.2	6.0	5.7	5.8	4.3	5.3	60
62	6.4	5.9	6.2	5.7	5.7	5.8	5.6	5.3	5.4	3.9	4.9	62
64	5.9	5.5	5.8	5.3	5.3	5.3	5.1	4.9	5.0	3.3	4.3	64
66	5.5	5.1	5.4	4.9	5.0	4.9	4.7	4.6	4.6	2.8	3.9	66
68	5.1	4.3	5.0	4.3	4.7	4.6	4.4	4.3	4.3	2.4	3.2	68
70	4.8	3.5	4.5	3.5	4.3	3.9	3.7	4.0	3.9	1.9	2.7	70
72	4.0	2.7	3.8	2.8	3.6	3.2	3.0	3.6	3.2		2.1	72
74	3.3	2.0	3.1	2.1	2.9	2.5	2.3	3.1	2.5			74
76	2.7	1.3	2.4	1.5	2.3	1.9	1.7	2.5	1.9			76
78	2.0		1.8		1.7	1.3	1.0	1.9	1.3			78
80	1.0		1.2		1.1			1.3				80
组合 code	022210	222100	122111	222200	221112	222111	222210	122221	222211	122222	222221	组合 code
倍率	4	1	1	1	1	1	1	1	1	1	1	
吊钩重量						1.3						

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

ГУТЕХНО

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

起重性能表

Lifting capacities

T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	36m	20°	SL			
	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	
	36 m									
26	9.7	9.8								26
28	9.3	9.4	9.2	9.1	9.1	9.3	9.3	9.1	8.8	28
30	8.9	9.0	8.9	8.9	8.9	9.0	9.0	8.8	8.6	30
32	8.6	8.7	8.7	8.7	8.6	8.7	8.7	8.5	8.4	32
34	8.3	8.4	8.4	8.5	8.3	8.4	8.4	8.2	8.2	34
36	8.0	8.1	8.1	8.2	8.0	8.1	8.2	7.9	8.0	36
38	7.8	7.9	7.8	8.0	7.7	7.9	7.9	7.6	7.8	38
40	7.5	7.6	7.6	7.6	7.5	7.7	7.7	7.5	7.6	40
42	7.3	7.3	7.3	7.4	7.3	7.4	7.5	7.3	7.4	42
44	7.1	7.1	7.1	7.2	7.1	7.2	7.3	7.1	7.2	44
46	6.8	6.9	6.9	6.9	6.9	7.0	7.0	6.9	7.0	46
48	6.7	6.7	6.7	6.8	6.7	6.8	6.9	6.7	6.9	48
50	6.5	6.5	6.5	6.6	6.6	6.7	6.7	6.6	6.7	50
52	6.3	6.3	6.4	6.4	6.5	6.5	6.5	6.4	6.5	52
54	6.1	6.1	6.3	6.3	6.3	6.4	6.4	6.3	6.4	54
56	6.0	6.0	6.1	6.1	6.2	6.2	6.2	6.1	6.2	56
58	5.8	5.8	6.0	6.0	5.9	6.1	6.1	5.7	5.8	58
60	5.7	5.7	5.8	5.8	5.6	5.8	5.7	5.3	5.5	60
62	5.5	5.5	5.7	5.5	5.3	5.4	5.2	5.0	5.1	62
64	5.4	5.2	5.3	5.1	4.9	5.0	4.9	4.6	4.8	64
66	5.1	4.8	5.0	4.6	4.5	4.7	4.5	4.3	4.3	66
68	4.8	4.4	4.6	4.2	4.2	4.3	4.2	4.0	4.0	68
70	4.4	4.1	4.2	3.9	3.9	4.0	3.8	3.7	3.7	70
72	4.1	3.5	3.9	3.4	3.6	3.7	3.5	3.3	3.4	72
74	3.8	2.8	3.6	2.7	3.3	3.0	2.8	2.9	3.0	74
76	3.3	2.1	3.0	2.1	2.8	2.4	2.2	2.4	2.3	76
78	2.6	1.4	2.3	1.5	2.1	1.8	1.6	2.0	1.7	78
80	2.0		1.8		1.6	1.2	1.0		1.1	80
82	1.4		1.2		1.0					82
组合 code	022210	222100	122111	222200	221112	222111	222210	122221	222211	组合 code
倍率	1	1	1	1	1	1	1	1	1	倍率
吊钩重量					1.3					吊钩重量

起重性能表

Lifting capacities


T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	42m	20°	SL		
	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m
	42 m	42 m	42 m	42 m	42 m	42 m	42 m	42 m	42 m
30	7.4	7.4	7.1	7.5					30
32	7.1	7.1	6.9	7.2	6.7	6.9	6.9	6.3	32
34	6.8	6.8	6.7	6.9	6.6	6.7	6.7	6.1	34
36	6.5	6.5	6.5	6.6	6.4	6.5	6.5	5.9	36
38	6.3	6.3	6.3	6.3	6.2	6.3	6.3	5.7	38
40	6.1	6.0	6.0	6.1	6.0	6.1	6.1	5.5	40
42	5.8	5.8	5.9	5.9	5.8	5.9	5.9	5.3	42
44	5.6	5.6	5.7	5.7	5.6	5.7	5.8	5.2	44
46	5.4	5.4	5.5	5.5	5.5	5.5	5.6	5.0	46
48	5.2	5.3	5.3	5.4	5.3	5.4	5.4	4.9	48
50	5.0	5.1	5.2	5.2	5.1	5.2	5.3	4.8	50
52	4.9	4.9	5.0	5.0	5.0	5.1	5.1	4.7	52
54	4.7	4.8	4.9	4.9	4.8	5.0	5.0	4.5	54
56	4.6	4.6	4.7	4.7	4.7	4.9	4.9	4.4	56
58	4.4	4.4	4.6	4.5	4.6	4.7	4.7	4.1	58
60	4.3	4.2	4.4	4.3	4.5	4.6	4.6	3.6	60
62	4.1	4.1	4.3	4.2	4.4	4.4	4.5	3.0	62
64	4.0	4.0	4.1	4.1	4.2	4.3	4.3	2.4	64
66	3.9	3.8	4.0	4.0	4.1	4.2	4.2	1.9	66
68	3.8	3.7	3.9	3.9	3.9	4.1	4.1	1.4	68
70	3.7	3.6	3.8	3.7	3.6	3.8	3.7	2.8	70
72	3.6	3.5	3.7	3.4	3.4	3.5	3.3	2.2	72
74	3.5	3.3	3.5	3.1	3.1	3.2	3.0	1.6	74
76	3.3	2.7	3.1	2.7	2.8	2.9	2.7	1.0	76
78	3.0	2.1	2.8	2.0	2.6	2.3	2.1		78
80	2.6	1.5	2.2	1.4	2.0	1.7	1.5		80
82	2.0		1.7		1.4	1.1			82
84	1.4		1.1						84
组合 code	022210	222100	122111	222200	221112	222111	222210	122221	222211
倍率	1	1	1	1	1	1	1	1	1
吊钩重量					1.3				

起升高度曲线图

Lifting height chart

固定副臂+超起
Fixed Jib + Super lifting device

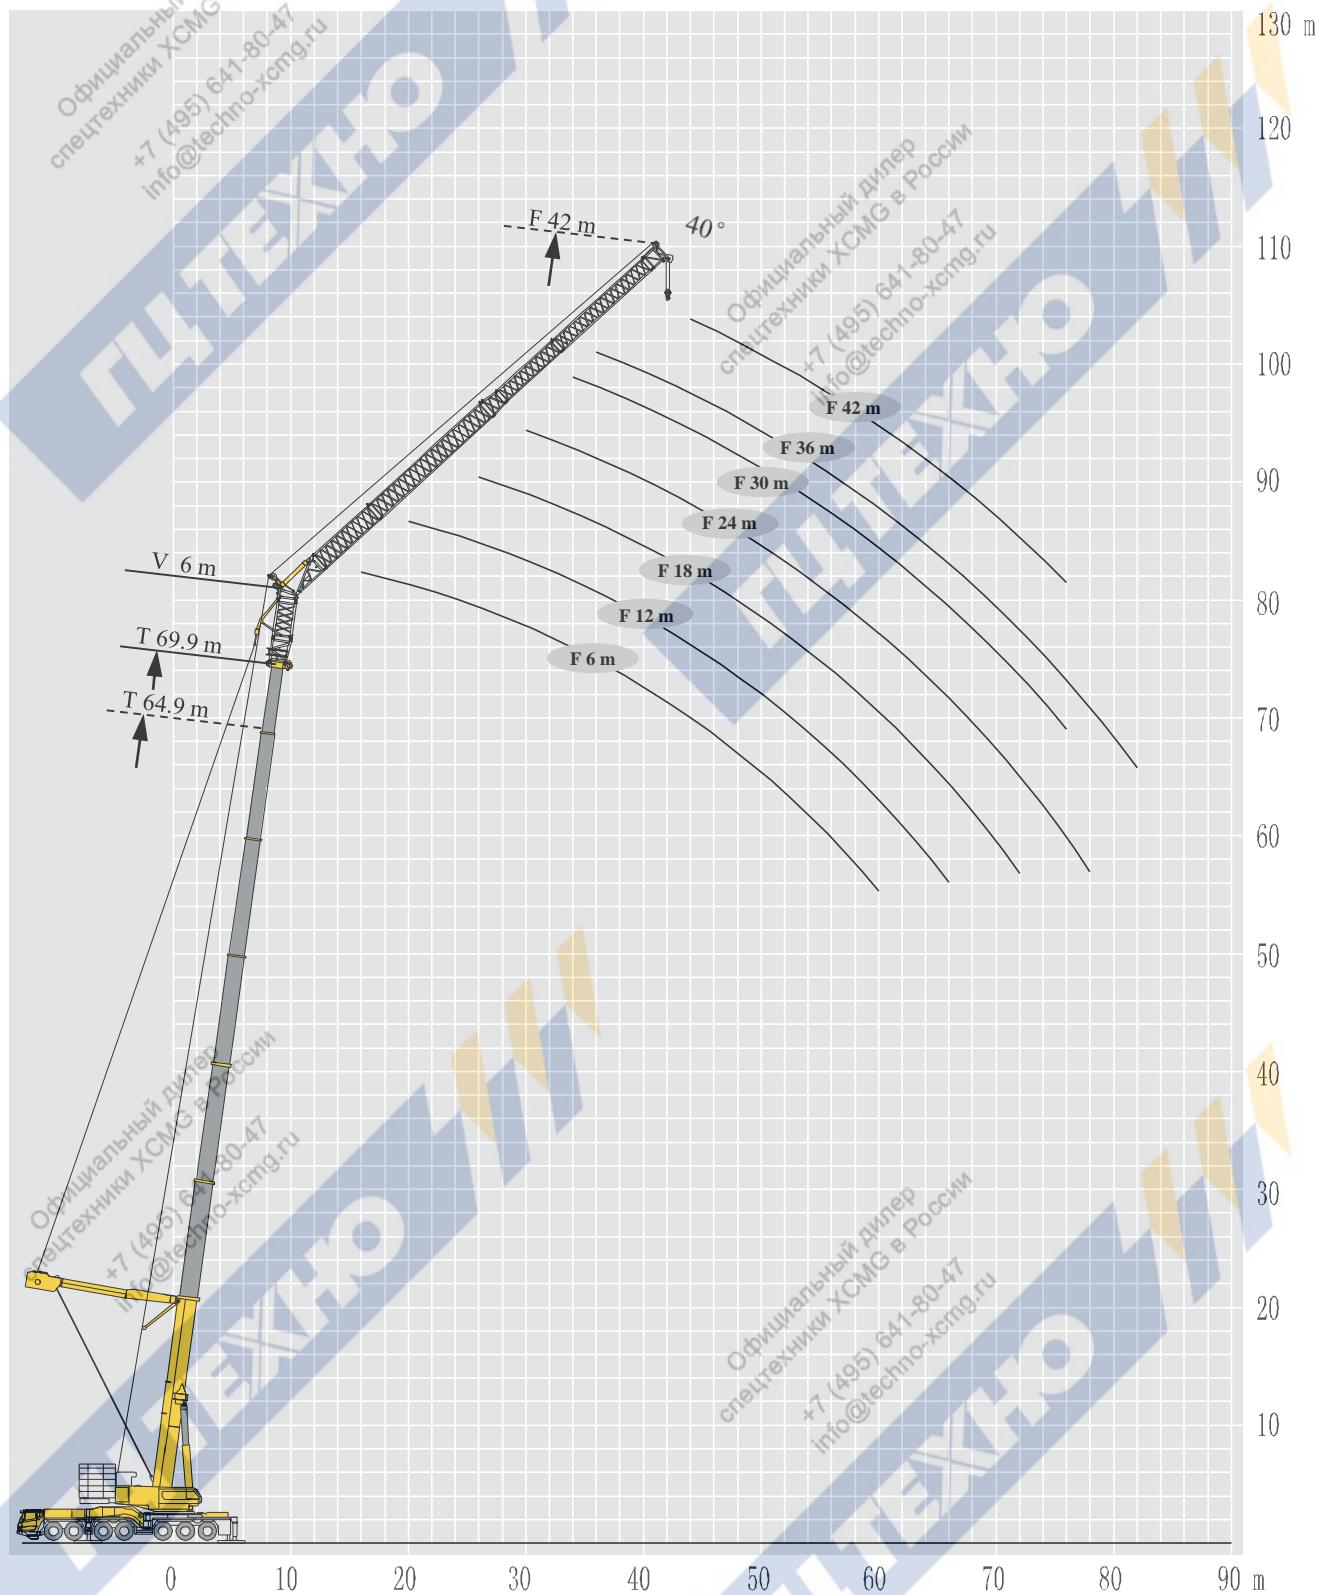

起重性能表

Lifting capacities

T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	6m	40°	SL					
	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	69.9+6 m	69.9+6 m	
	6 m	6 m	6 m	6 m	6 m	6 m	6 m	6 m	6 m	6 m	6 m	13
13	31.8	31.6										13
14	31.2	31.2	31.4	31.4	31.4	31.0	31.2					14
16	30.5	30.6	30.7	30.7	30.9	30.7	30.8	30.9	30.6	29.3	31.2	16
18	29.9	30.0	30.2	30.4	30.3	30.3	30.5	30.2	30.2	28.1	30.3	18
20	29.2	29.2	29.5	29.6	29.7	29.7	29.9	29.6	29.8	27.0	27.9	20
22	28.5	28.5	28.7	28.9	29.1	29.1	29.1	27.2	27.8	25.1	25.8	22
24	27.9	28.0	28.4	27.9	26.8	27.5	26.9	25.3	25.8	23.6	24.2	24
26	27.4	26.7	26.7	25.6	24.9	25.3	24.9	23.6	24.0	22.1	22.5	26
28	26.1	24.8	24.8	23.9	23.1	23.7	23.2	22.1	22.4	20.6	21.0	28
30	24.6	22.9	23.3	22.1	21.5	22.0	21.6	20.8	21.0	19.5	19.8	30
32	23.0	21.4	21.7	20.6	20.1	20.6	20.0	19.5	19.6	18.3	18.5	32
34	21.6	20.0	20.3	19.3	19.0	19.4	18.8	18.3	18.4	17.2	17.4	34
36	20.3	18.7	19.2	17.9	17.8	18.1	17.5	17.1	17.2	16.2	16.2	36
38	19.1	17.2	18.0	16.7	16.6	16.9	16.3	16.0	16.1	15.3	15.3	38
40	18.0	16.1	16.9	15.6	15.5	15.9	15.3	15.1	15.0	14.3	14.3	40
42	16.8	15.1	15.9	14.6	14.6	14.9	14.3	14.2	14.1	13.5	13.5	42
44	15.3	13.6	14.9	13.6	13.7	14.0	13.3	13.4	13.3	12.8	12.6	44
46	13.6	11.8	13.7	12.3	12.9	13.2	12.5	12.6	12.4	12.0	11.9	46
48			12.2	10.8	12.1	11.7	11.3	11.9	11.7	11.4	11.1	48
50			10.7	9.3	10.9	10.2	9.9	11.1	10.5	10.7	10.5	50
52				9.6	8.9	8.6	10.1	9.2	10.1	9.6	52	
54							8.9	8.0	9.4	8.4	54	
56							7.8	6.9	8.3	7.3	56	
58									7.3	6.3	58	
60									6.3	5.3	60	
组合 code	121111	222100	122111	222200	122220	222111	222210	122221	222211	122222	222221	组合 code
倍率 吊钩重 量	3	3	3	3	3	3	3	3	3	3	3	倍率 吊钩重 量

1.3

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

起重性能表

Lifting capacities

T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	12m	40°	SL						
	50+6 m	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	69.9+6 m	69.9+6 m	
	12 m	18											
18	21.7	21.7	21.8	21.8	21.7								20
20	21.3	21.3	21.3	21.4	21.4	21.5	21.3	21.5	21.4	21.5	19.3	21.4	22
22	21.0	20.9	20.9	21.1	21.0	21.1	21.1	21.2	21.0	21.1	18.6	20.8	24
24	20.6	20.6	20.6	20.7	20.6	20.8	20.8	20.8	20.7	20.8	18.0	20.2	26
26	20.4	20.4	20.4	20.5	20.5	20.6	20.6	20.5	20.5	20.5	17.3	19.5	28
28	20.0	20.0	20.0	20.2	20.2	20.4	20.4	20.4	19.2	19.8	16.7	18.4	30
30	19.8	19.8	19.8	19.9	19.9	19.3	19.7	19.5	18.0	18.7	16.1	17.3	32
32	19.5	19.4	19.5	19.2	18.7	18.0	18.5	18.2	17.1	17.5	15.5	16.3	34
34	18.5	18.9	18.2	18.0	17.5	17.0	17.3	17.0	16.0	16.4	14.8	15.3	36
36	17.3	17.8	17.0	16.8	16.4	15.9	16.3	15.9	15.1	15.4	14.0	14.4	38
38	16.2	16.8	15.9	15.9	15.4	15.0	15.3	15.0	14.3	14.4	13.2	13.6	40
40	15.3	15.8	14.9	15.1	14.4	14.1	14.3	14.0	13.4	13.5	12.4	12.8	42
42	14.4	14.9	13.9	14.1	13.4	13.2	13.5	13.1	12.6	12.7	11.8	12.0	44
44	13.5	14.1	13.0	13.3	12.6	12.4	12.7	12.3	11.9	12.0	11.1	11.3	46
46	12.7	13.3	12.2	12.5	11.7	11.6	11.9	11.5	11.2	11.2	10.5	10.7	48
48	12.0	12.6	11.4	11.8	11.0	11.0	11.1	10.7	10.5	10.6	9.9	10.1	50
50	11.3	12.0	10.7	11.2	10.3	10.4	10.5	10.1	10.0	10.1	9.3	9.5	52
52	10.7	10.9	9.3	10.6	9.7	9.8	9.9	9.5	9.4	9.5	8.9	8.9	54
54				9.6	8.4	9.1	9.2	8.9	8.9	8.9	8.4	8.3	56
56				8.4	7.2	8.5	8.0	7.7	8.4	8.2	7.9	7.8	58
58					7.4	6.9	6.6	7.8	7.1	7.4	7.3	58	
60									6.9	6.1	7.0	6.4	60
62									6.0	5.2	6.4	5.5	62
64											5.5	4.6	64
66											4.7	3.8	66
组合 code	022210	121111	222100	122111	222200	122220	222111	222210	122221	222211	122222	222221	组合 code
倍率 吊钩重 量	2	2	2	2	2	2	2	2	2	2	2	2	倍率 吊钩重 量

1.3

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

起重性能表

Lifting capacities

T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	18m	40°	SL						
	50+6 m	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	69.9+6 m	69.9+6 m	
	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	18 m	22
22	13.8	13.8	13.9										22
24	13.5	13.6	13.5	13.6	13.6	13.9	13.8	13.9	14.0	13.9			24
26	13.3	13.2	13.3	13.4	13.4	13.5	13.5	13.5	13.7	13.7	12.4	13.9	26
28	13.0	12.9	13.0	13.1	13.1	13.2	13.2	13.2	13.4	13.4	12.2	13.7	28
30	12.7	12.7	12.7	12.9	12.9	13.0	13.0	13.0	13.2	13.2	11.9	13.5	30
32	12.5	12.5	12.5	12.7	12.7	12.8	12.8	12.8	13.1	13.0	11.6	13.3	32
34	12.2	12.3	12.2	12.4	12.4	12.6	12.6	12.6	12.9	12.8	11.4	13.1	34
36	12.0	12.0	12.0	12.2	12.2	12.4	12.5	12.4	12.7	12.7	11.1	13.0	36
38	11.8	11.8	11.8	12.0	12.0	12.2	12.3	12.2	12.5	12.5	10.9	12.3	38
40	11.7	11.6	11.7	11.8	11.8	12.1	12.1	12.0	12.2	12.3	10.7	11.7	40
42	11.6	11.5	11.6	11.7	11.7	12.0	11.9	11.9	11.6	11.8	10.3	11.1	42
44	11.4	11.4	11.4	11.5	11.6	11.5	11.7	11.5	10.9	11.1	9.8	10.4	44
46	11.3	11.3	11.3	11.4	11.1	10.9	11.0	10.8	10.3	10.5	9.4	9.8	46
48	11.2	11.2	10.7	10.9	10.5	10.2	10.4	10.2	9.7	9.9	8.9	9.2	48
50	10.5	10.9	10.2	10.4	9.9	9.6	9.8	9.6	9.1	9.3	8.4	8.7	50
52	10.0	10.4	9.5	9.8	9.3	9.1	9.2	9.0	8.7	8.7	7.9	8.1	52
54	9.4	9.9	8.9	9.2	8.6	8.5	8.6	8.4	8.1	8.2	7.5	7.7	54
56	8.8	9.3	8.3	8.7	8.0	8.1	8.2	7.8	7.7	7.7	7.1	7.2	56
58	8.3	8.7	7.3	8.2	7.5	7.5	7.6	7.3	7.2	7.2	6.7	6.8	58
60				7.6	6.5	7.1	7.2	6.9	6.8	6.8	6.3	6.3	60
62					5.5	6.6	6.2	5.9	6.4	6.3	5.9	5.9	62
64						5.7	5.2	5.0	6.0	5.4	5.5	5.5	64
66									5.3	4.6	5.2	4.8	66
68									4.4	3.7	4.8	4.0	68
70											4.0	3.2	70
72											3.3	2.5	72
组合 code	022210	121111	222100	122111	222200	122220	222111	222210	122221	222211	122222	222221	组合 code
倍率	1	1	1	1	1	1	1	1	1	1	1	1	倍率
吊钩重 量													吊钩重 量

1.3

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

起重性能表

Lifting capacities

T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	24m	40°	SL				
	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	69.9+6 m	69.9+6 m	
28	10.5	10.4	10.4	10.4	10.4	10.3					28
30	10.4	10.4	10.4	10.4	10.4	10.4	10.5	10.5	8.7	10.1	30
32	10.2	10.2	10.2	10.2	10.3	10.4	10.4	10.4	8.5	10.0	32
34	9.9	10.0	10.0	10.1	10.1	10.2	10.3	10.3	8.3	9.9	34
36	9.7	9.7	9.9	9.9	9.9	10.1	10.2	10.2	8.1	9.8	36
38	9.5	9.5	9.7	9.7	9.8	9.9	10.0	10.0	7.9	9.7	38
40	9.3	9.3	9.5	9.5	9.7	9.7	9.8	9.8	7.8	9.6	40
42	9.2	9.2	9.3	9.3	9.5	9.8	9.7	9.7	7.7	9.5	42
44	9.0	9.0	9.2	9.2	9.4	9.4	9.6	9.5	7.5	9.3	44
46	8.9	8.9	9.0	9.1	9.2	9.2	9.4	9.5	7.4	8.9	46
48	8.7	8.8	9.0	9.0	9.1	9.1	8.9	9.2	7.2	8.3	48
50	8.7	8.7	8.9	8.9	9.0	9.0	8.4	8.6	7.1	7.9	50
52	8.6	8.6	8.8	8.8	8.6	8.5	7.9	8.2	6.8	7.4	52
54	8.5	8.5	8.6	8.1	8.1	8.0	7.4	7.7	6.6	7.0	54
56	8.3	7.9	8.0	7.6	7.6	7.4	7.0	7.2	6.3	6.6	56
58	7.8	7.4	7.5	7.1	7.2	7.0	6.6	6.8	5.9	6.2	58
60	7.3	6.9	7.1	6.6	6.7	6.5	6.2	6.3	5.5	5.8	60
62	6.9	6.4	6.7	6.2	6.3	6.1	5.8	5.9	5.2	5.4	62
64	6.4	5.5	6.3	5.8	5.8	5.6	5.4	5.5	4.9	5.0	64
66			5.9	4.9	5.4	5.2	5.1	5.1	4.6	4.6	66
68			5.0	4.0	4.6	4.3	4.7	4.7	4.2	4.2	68
70					3.7	3.5	4.4	3.9	3.9	3.9	70
72							3.8	3.1	3.6	3.4	72
74								2.4	3.3	2.6	74
76									2.7	1.9	76
组合 code									2.0	1.3	组合 code
倍率 吊钩重 量	1	1	1	1	1	1	1	1	1	1	倍率 吊钩重 量

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

起重性能表

Lifting capacities

T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	30m	40°	SL					
	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	69.9+6 m	69.9+6 m	
32	7.5	7.6	7.5	7.7								32
34	7.3	7.3	7.3	7.4	7.4	7.4	7.4	7.3	6.7	7.2		34
36	7.1	7.1	7.2	7.2	7.2	7.3	7.3	7.3	6.4	7.1		36
38	7.0	7.0	7.0	7.0	7.1	7.1	7.2	7.2	6.1	7.0		38
40	6.8	6.8	6.9	6.9	6.9	7.0	7.1	7.1	5.7	6.9		40
42	6.7	6.7	6.7	6.8	6.8	6.8	6.8	7.0	5.4	6.8		42
44	6.6	6.5	6.6	6.6	6.7	6.7	6.8	6.8	5.3	6.7		44
46	6.4	6.4	6.5	6.5	6.6	6.6	6.7	6.7	5.2	6.7		46
48	6.3	6.3	6.4	6.4	6.5	6.5	6.6	6.7	5.1	6.6		48
50	6.2	6.2	6.3	6.3	6.4	6.4	6.5	6.5	5.0	6.6		50
52	6.1	6.1	6.2	6.1	6.3	6.3	6.4	6.4	4.9	6.5		52
54	6.0	6.0	6.1	6.1	6.2	6.2	6.4	6.3	4.8	6.4		54
56	5.9	5.9	6.0	6.0	6.1	6.1	6.3	6.3	4.7	6.1		56
58	5.9	5.8	5.9	5.9	6.0	6.1	6.1	6.2	4.6	5.8		58
60	5.8	5.8	5.9	5.8	5.9	6.0	5.9	5.7	4.5	5.4		60
62	5.7	5.7	5.8	5.8	5.7	5.8	5.8	5.3	4.4	5.1		62
64	5.7	5.7	5.7	5.4	5.4	5.4	5.3	5.0	3.9	4.7		64
66	5.6	5.2	5.4	5.0	5.0	5.0	4.9	4.7	3.5	4.3		66
68	5.2	4.7	5.0	4.6	4.7	4.7	4.5	4.4	2.9	4.0		68
70	4.8	4.1	4.7	4.2	4.4	4.3	4.1	4.0	2.4	3.3		70
72			4.4	3.5	4.1	4.0	3.8	3.7	2.0	2.9		72
74			3.6	2.7	3.6	3.2	3.0	3.4		2.2		74
76					2.9	2.5	2.2	3.1	2.6		1.7	76
78								2.5	1.9			78
80								1.9	1.2			80
组合 code	022210	222100	122111	222200	221112	222111	222210	122221	222211	122222	222221	组合 code
倍率 吊钩重 量	1	1	1	1	1	1	1	1	1	1	1	倍率 吊钩重 量

1.3

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

起重性能表

Lifting capacities

T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	36m	40°	SL			
	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m	
36	36 m	36 m	36 m	36 m	36 m	36 m	36 m	36 m	36 m	36
38	5.6	5.8	5.6	5.6	5.5	5.6	5.6	5.6	5.7	38
40	5.4	5.4	5.5	5.5	5.4	5.5	5.5	5.5	5.6	40
42	5.3	5.3	5.4	5.4	5.3	5.4	5.4	5.4	5.5	42
44	5.1	5.2	5.2	5.3	5.2	5.3	5.3	5.3	5.4	44
46	5.0	5.0	5.1	5.2	5.1	5.1	5.2	5.2	5.3	46
48	4.9	4.9	5.0	5.1	5.0	5.0	5.0	5.2	5.1	48
50	4.8	4.8	4.9	4.9	4.9	5.0	5.0	5.1	5.0	50
52	4.7	4.7	4.8	4.8	4.9	4.9	4.9	5.0	5.0	52
54	4.6	4.6	4.7	4.7	4.8	4.8	4.8	4.9	4.9	54
56	4.5	4.5	4.6	4.6	4.7	4.7	4.7	4.9	4.8	56
58	4.4	4.4	4.6	4.5	4.6	4.6	4.6	4.8	4.8	58
60	4.3	4.3	4.5	4.4	4.6	4.6	4.5	4.7	4.7	60
62	4.3	4.3	4.4	4.4	4.5	4.5	4.5	4.8	4.7	62
64	4.2	4.2	4.3	4.3	4.4	4.4	4.4	4.7	4.6	64
66	4.2	4.2	4.3	4.3	4.4	4.4	4.4	4.4	4.5	66
68	4.1	4.1	4.2	4.2	4.3	4.3	4.3	4.1	4.2	68
70	4.1	4.1	4.2	4.1	4.0	4.1	4.0	3.7	3.9	70
72	4.1	3.8	4.0	3.7	3.7	3.7	3.6	3.4	3.6	72
74	3.8	3.5	3.7	3.4	3.4	3.4	3.3	3.2	3.2	74
76	3.5	2.7	3.4	2.9	3.1	3.1	3.0	2.9	2.9	76
78			3.0	2.2	2.8	2.6	2.4	2.6	2.6	78
80			2.3	1.4	2.3	1.9	1.7	2.0	2.0	80
82					1.6	1.3	1.1	1.6	1.4	82
组合 code	022210	222100	122111	222200	221112	222111	222210	122221	222211	组合 code
倍率	1	1	1	1	1	1	1	1	1	倍率
吊钩重量					1.3					吊钩重量

起重性能表

Lifting capacities

T 50~69.9m

	50-69.9m	9.6m×9.6m	360°	160t	42m	40°	SL	
	50+6 m	50+6 m	55+6 m	55+6 m	59.9+6 m	59.9+6 m	64.9+6 m	64.9+6 m
40	4.2	4.0						
42	4.0	3.9	3.9		3.9	4.0		
44	3.8	3.8	3.8		3.9	3.9	3.3	4.0
46	3.7	3.6	3.7		3.8	3.8	3.3	3.9
48	3.6	3.5	3.6		3.7	3.7	3.3	3.8
50	3.5	3.4	3.5		3.6	3.6	3.3	3.7
52	3.4	3.3	3.4		3.5	3.5	3.3	3.6
54	3.3	3.3	3.3		3.4	3.4	3.3	3.5
56	3.2	3.2	3.3		3.3	3.4	3.3	3.5
58	3.2	3.1	3.2		3.3	3.3	3.2	3.4
60	3.1	3.0	3.1		3.3	3.2	3.2	3.3
62	3.0	3.0	3.1		3.2	3.2	3.2	3.3
64	2.9	2.9	3.0		3.1	3.1	3.1	3.3
66	2.8	2.8	3.0		3.0	3.1	3.0	3.2
68	2.8	2.8	2.9		2.9	3.0	2.5	3.2
70	2.7	2.7	2.8		2.8	3.0	2.0	3.1
72	2.7	2.7	2.8		2.9	2.9	1.4	3.0
74	2.7	2.7	2.8		2.9	2.9		2.8
76	2.7	2.7	2.7		2.8	2.8		2.2
78	2.7	2.6	2.7		2.8	2.7		
80	2.7	2.3	2.7		2.4	2.5		
82	2.5	1.6	2.4		1.8	2.1		
84					1.8	1.5		
86					1.2	1.3		
组合 code	022210	222100	122111	222200	222111	222210	122221	222211
倍率 吊钩重 量	1	1	1	1	1	1	1	1
				1.3				


Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

起升高度曲线图

Lifting height chart

变幅副臂
Luffing Jib

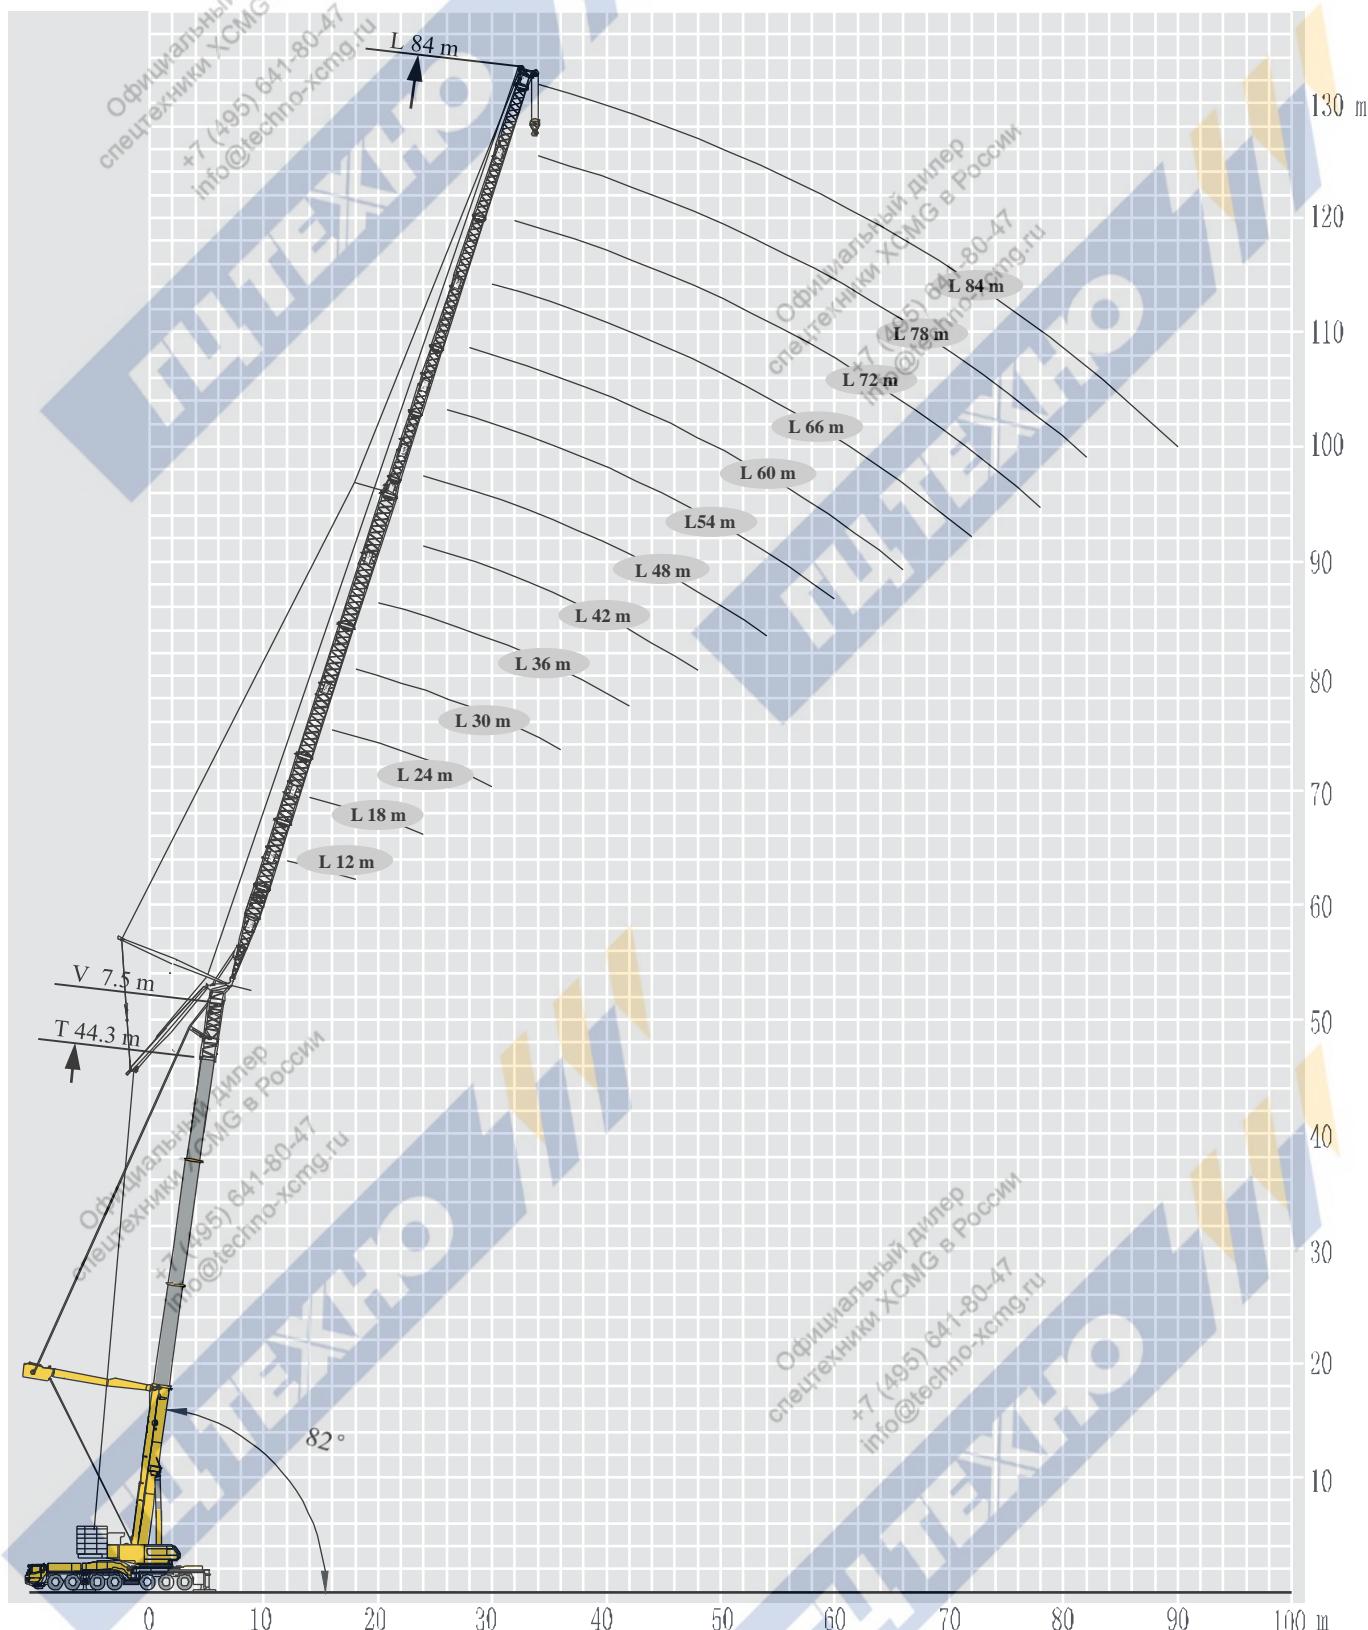

起重性能表

Lifting capacities


T 24.5~44.3m

	24.5-44.3m	9.6m×9.6m	360°	160t	84m	82°	SL	
	24.5+7.5 m	29.5+7.5 m	34.4+7.5 m	34.4+7.5 m	39.4+7.5 m	44.3+7.5 m		
	84 m							
27	11.2	11.0						27
28	11.2	11.0	10.4	10.7				28
29	11.2	11.0	10.4	10.7	10.2	9.3		29
30	11.2	11.0	10.4	10.7	10.2	9.3		30
31	11.2	11.0	10.4	10.7	10.2	9.3		31
32	11.2	11.0	10.4	10.7	10.2	9.3		32
34	10.7	10.6	10.4	10.7	10.2	9.3		34
36	10.3	10.3	10.1	10.3	9.9	9.0		36
38	9.8	9.9	9.7	9.9	9.5	8.7		38
40	9.4	9.5	9.2	9.6	9.1	8.5		40
42	8.9	9.0	8.9	9.2	8.7	8.2		42
44	8.6	8.7	8.6	8.8	8.4	7.8		44
46	8.2	8.3	8.2	8.4	8.1	7.5		46
48	7.8	8.0	8.0	8.2	7.8	7.3		48
50	7.6	7.6	7.7	7.9	7.6	7.1		50
52	7.3	7.4	7.4	7.6	7.3	6.8		52
54	7.0	7.1	7.1	7.4	7.0	6.5		54
56	6.8	6.9	6.9	7.1	6.8	6.3		56
58	6.5	6.6	6.7	6.9	6.6	6.0		58
60	6.3	6.4	6.5	6.6	6.4	5.8		60
62	6.1	6.2	6.2	6.4	6.2	5.6		62
64	5.9	6.0	6.1	6.2	6.0	5.5		64
66	5.8	5.8	5.9	6.0	5.8	5.3		66
68	5.6	5.6	5.7	5.9	5.6	5.2		68
70	5.5	5.5	5.6	5.7	5.5	5.0		70
72	5.4	5.4	5.5	5.6	5.3	4.9		72
74	5.3	5.3	5.4	5.5	5.1	4.8		74
76	5.2	5.1	5.4	5.4	5.0	4.7		76
78	5.1	5.0	5.1	5.1	4.8	4.6		78
80	4.9	4.8	5.1	5.0	4.7	4.4		80
82	4.7	4.6	4.8	4.8	4.5	4.2		82
84	4.5	4.4	4.7	4.7	4.3	4.1		84
86	4.4	4.3	4.4	4.4	4.1	3.9		86
88		4.2	4.2	4.2	3.9	3.8		88
90			211	220		3.5		90
组合 code	110	210		220	221	222		组合 code
倍率	1	1	1	1.3		1		倍率
吊钩重量								吊钩重量

起重性能表

Lifting capacities

T 24.5~44.3m

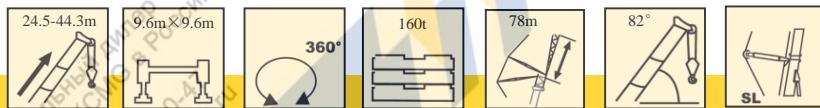

	24.5+7.5 m	29.5+7.5 m	34.4+7.5 m	34.4+7.5 m	39.4+7.5 m	44.3+7.5 m	
	78 m						
25	12.8						25
26	12.8	12.7	12.0	12.2			26
27	12.8	12.7	12.0	12.2	11.7		27
28	12.8	12.7	12.0	12.2	11.7	10.6	28
30	12.8	12.7	12.0	12.2	11.7	10.6	30
32	12.4	12.2	12.0	12.2	11.7	10.6	32
34	11.9	11.8	11.6	11.8	11.3	10.6	34
36	11.3	11.3	11.2	11.5	10.9	10.3	36
38	10.9	10.9	10.8	11.0	10.6	9.9	38
40	10.5	10.4	10.4	10.6	10.2	9.5	40
42	9.9	10.0	10.0	10.2	9.8	9.1	42
44	9.6	9.6	9.6	9.8	9.4	8.7	44
46	9.2	9.2	9.2	9.4	9.1	8.4	46
48	8.8	8.9	8.9	9.0	8.7	8.2	48
50	8.5	8.5	8.5	8.7	8.4	7.9	50
52	8.2	8.1	8.3	8.4	8.1	7.6	52
54	7.9	7.9	7.9	8.1	7.9	7.3	54
56	7.6	7.6	7.7	7.9	7.6	7.1	56
58	7.4	7.4	7.5	7.6	7.4	6.8	58
60	7.2	7.2	7.3	7.4	7.2	6.7	60
62	7.1	7.0	7.1	7.2	7.0	6.5	62
64	6.9	6.8	6.9	7.0	6.8	6.3	64
66	6.7	6.7	6.8	6.8	6.6	6.1	66
68	6.5	6.5	6.7	6.7	6.5	6.0	68
70	6.3	6.3	6.4	6.4	6.3	5.8	70
72	6.1	6.1	6.2	6.1	6.0	5.7	72
74	5.9	5.9	5.9	5.8	5.9	5.6	74
76	5.7	5.6	5.5	5.4	5.3	5.1	76
78	5.5	5.4	5.3	5.2	5.1	4.9	78
80	5.3	5.2	5.1	5.0	4.9	4.8	80
82	5.1	5.0	4.9	4.9	4.6	4.4	82
组合 code	410	210	211	220	221	222	组合 code
倍率	1	1	1	1	1	1	倍率
吊钩重量							吊钩重量

1.3


Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

起重性能表

Lifting capacities

T 24.5~44.3m

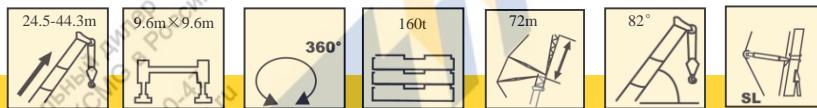

	24.5+7.5 m	29.5+7.5 m	34.4+7.5 m	34.4+7.5 m	39.4+7.5 m	44.3+7.5 m	
23	14.9						23
24	14.9	14.1					24
25	14.9	14.1	14.0	14.2	13.6		25
26	14.9	14.1	14.0	14.2	13.6	12.2	26
27	14.9	14.1	14.0	14.2	13.6	12.2	27
28	14.9	14.1	14.0	14.2	13.6	12.2	28
30	14.3	14.1	14.0	14.2	13.6	12.2	30
32	13.7	13.6	13.4	13.7	13.1	12.2	32
34	13.1	13.0	12.9	13.1	12.6	11.8	34
36	12.6	12.5	12.3	12.6	12.1	11.5	36
38	12.0	11.9	11.9	12.1	11.7	11.1	38
40	11.5	11.4	11.4	11.6	11.3	10.6	40
42	11.1	11.0	11.0	11.3	10.9	10.3	42
44	10.5	10.5	10.6	10.8	10.5	9.9	44
46	10.2	10.2	10.3	10.4	10.1	9.5	46
48	9.8	9.8	9.9	10.0	9.7	9.1	48
50	9.4	9.4	9.5	9.7	9.4	8.8	50
52	9.1	9.0	9.3	9.4	9.0	8.5	52
54	8.9	8.8	8.9	9.1	8.8	8.2	54
56	8.6	8.6	8.7	8.8	8.6	8.0	56
58	8.4	8.4	8.5	8.6	8.3	7.7	58
60	8.3	8.2	8.3	8.4	8.1	7.6	60
62	8.2	8.0	8.1	8.2	7.9	7.4	62
64	8.1	7.9	8.0	8.0	7.7	7.2	64
66	7.9	7.7	7.9	7.9	7.6	7.1	66
68	7.7	7.4	7.5	7.6	7.4	7.0	68
70	7.5	7.3	7.4	7.5	7.2	6.8	70
72	7.3	7.1	7.0	7.0	6.8	6.4	72
74	7.0	6.8	6.6	6.6	6.4	6.1	74
76		6.5	6.4	6.4	6.1	5.9	76
78						5.5	78
组合 code	410	210	211	220	221	222	组合 code
倍率	2	2	2	2	1	1	倍率
吊钩重量							吊钩重量

1.3

起重性能表

Lifting capacities

T 24.5~44.3m

	24.5-44.3m	9.6m×9.6m	360°	160t	66m	82°	SL	
	24.5+7.5 m	29.5+7.5 m	34.4+7.5 m	34.4+7.5 m	39.4+7.5 m	44.3+7.5 m		
	66 m							
22	17.1	16.2					22	
23	17.1	16.2	15.8	16.3			23	
24	17.1	16.2	15.8	16.3	15.6	14.2	24	
25	17.1	16.2	15.8	16.3	15.6	14.2	25	
26	17.1	16.2	15.8	16.3	15.6	14.2	26	
28	16.4	16.2	15.8	16.3	15.6	14.2	28	
30	15.6	15.4	15.2	15.6	15.0	14.2	30	
32	14.9	14.7	14.7	14.9	14.5	13.7	32	
34	14.2	14.1	14.0	14.3	13.8	13.1	34	
36	13.6	13.4	13.5	13.7	13.3	12.6	36	
38	13.0	12.9	12.9	13.2	12.8	12.1	38	
40	12.4	12.4	12.5	12.6	12.3	11.7	40	
42	12.0	11.8	12.1	12.2	11.9	11.2	42	
44	11.5	11.5	11.5	11.8	11.5	10.8	44	
46	11.2	11.1	11.1	11.4	11.1	10.5	46	
48	10.8	10.7	10.9	11.0	10.7	10.1	48	
50	10.5	10.4	10.5	10.6	10.4	9.7	50	
52	10.2	10.1	10.3	10.3	10.1	9.4	52	
54	9.9	9.8	10.0	10.2	9.9	9.1	54	
56	9.8	9.6	9.8	9.9	9.6	8.9	56	
58	9.7	9.4	9.6	9.7	9.4	8.7	58	
60	9.6	9.3	9.4	9.5	9.2	8.5	60	
62	9.4	9.1	9.0	9.0	8.9	8.4	62	
64	9.3	9.0	8.8	8.7	8.6	8.3	64	
66	9.0	8.7	8.6	8.5	8.4	8.2	66	
68	8.6	8.4	8.4	8.3	8.0	7.8	68	
70		8.1	8.0	7.9	7.8	7.6	70	
72						7.3	72	
组合 code	110	210	211	220	221	222	组合 code	
倍率	2	2	2	2	2	2	倍率	
吊钩重量				1.3			吊钩重量	

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

起重性能表

Lifting capacities

T 24.5~44.3m

	24.5-44.3m	9.6m×9.6m	360°	160t	60m	82°	SL	
	24.5+7.5 m	29.5+7.5 m	34.4+7.5 m	34.4+7.5 m	39.4+7.5 m	44.3+7.5 m		
	60 m							
20	19.8						20	
21	19.8	18.4	18.1	18.7			21	
22	19.8	18.4	18.1	18.7	17.8		22	
23	19.8	18.4	18.1	18.7	17.8	16.0	23	
24	19.8	18.4	18.1	18.7	17.8	16.0	24	
26	18.7	18.4	18.1	18.7	17.8	16.0	26	
28	17.7	17.5	17.4	17.7	17.1	16.0	28	
30	16.9	16.6	16.6	16.8	16.3	15.4	30	
32	16.1	15.8	15.9	16.1	15.7	14.9	32	
34	15.3	15.2	15.3	15.5	15.1	14.3	34	
36	14.7	14.6	14.7	14.8	14.5	13.8	36	
38	14.2	14.0	14.2	14.2	13.9	13.2	38	
40	13.6	13.5	13.6	13.7	13.4	12.7	40	
42	13.1	13.0	13.1	13.3	12.9	12.3	42	
44	12.6	12.6	12.8	12.8	12.5	11.9	44	
46	12.3	12.2	12.3	12.5	12.2	11.4	46	
48	12.0	11.8	11.9	12.1	11.8	11.1	48	
50	11.7	11.5	11.7	11.7	11.5	10.8	50	
52	11.5	11.3	11.4	11.5	11.2	10.5	52	
54	11.4	11.1	11.2	11.3	11.0	10.3	54	
56	11.1	11.0	10.7	10.6	10.3	10.1	56	
58	10.7	10.5	10.4	10.3	9.7	9.5	58	
60	10.5	10.1	9.8	9.7	9.5	9.3	60	
62	10.1	9.9	9.6	9.5	9.3	8.9	62	
64		9.5	9.4	9.3	8.9	8.7	64	
66						8.1	66	
组合 code	110	210	211	220	221	222	组合 code	
倍率	2	2	2	2	2	2	倍率	
吊钩重量				1.3			吊钩重量	

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

Официальный дилер
спецтехники XCMG в России
+7 (495) 641-80-47
info@techno-xcmg.ru

起重性能表

Lifting capacities

T 24.5~44.3m




	24.5-44.3m 9.6m×9.6m 360°	29.5+7.5 m	34.4+7.5 m	34.4+7.5 m	39.4+7.5 m	44.3+7.5 m	
	24.5+7.5 m	54 m	54 m	54 m	54 m	54 m	
22	27.1						22
24	25.9	25.8	25.3	25.6	24.7		24
26	24.6	24.6	24.2	24.5	23.7	21.9	26
28	23.3	23.3	23.2	23.5	22.6	21.1	28
30	22.1	22.3	22.1	22.5	21.7	20.2	30
32	21.1	21.2	21.3	21.6	20.8	19.4	32
34	20.1	20.2	20.2	20.6	19.8	18.6	34
36	19.3	19.4	19.5	19.7	19.0	17.8	36
38	18.7	18.6	18.8	19.0	18.4	17.2	38
40	18.1	18.1	18.2	18.4	17.7	16.5	40
42	17.5	17.5	17.5	17.7	17.1	15.9	42
44	17.1	17.1	17.1	17.3	16.6	15.4	44
46	16.6	16.6	16.6	16.7	16.0	14.9	46
48	16.3	16.2	16.2	16.3	15.7	14.5	48
50	16.2	16.0	16.0	16.0	15.3	14.1	50
52	16.2	15.9	15.8	15.8	15.1	13.8	52
54	16.0	15.7	15.5	15.5	14.9	13.6	54
56	15.5	15.4	15.0	15.0	14.7	13.4	56
58		14.7	14.5	14.5	14.2	12.9	58
60						12.4	60
组合 code	110	210	211	220	221	222	组合 code
倍率	2	2	2	2	2	2	倍率
吊钩重量			1.3				吊钩重量

	24.5-44.3m 9.6m×9.6m 360°	29.5+7.5 m	34.4+7.5 m	34.4+7.5 m	39.4+7.5 m	44.3+7.5 m	
	24.5+7.5 m	48 m	48 m	48 m	48 m	48 m	
22	28.9	28.4	28.3	29.0			22
24	27.2	27.1	27.1	27.6	26.2	24.8	24
26	25.7	25.7	25.8	26.1	25.2	23.8	26
28	24.4	24.3	24.6	24.8	24.1	22.7	28
30	23.3	23.2	23.5	23.8	23.1	21.7	30
32	22.3	22.3	22.5	22.7	22.0	20.8	32
34	21.5	21.3	21.6	21.9	21.1	19.8	34
36	20.6	20.5	20.8	21.0	20.3	19.0	36
38	19.8	19.7	19.9	20.2	19.5	18.4	38
40	19.3	19.1	19.3	19.5	18.9	17.7	40
42	18.9	18.7	18.9	19.1	18.4	17.1	42
44	18.6	18.3	18.5	18.7	18.0	16.7	44
46	18.5	18.2	18.2	18.2	17.5	16.3	46
48	18.4	18.1	18.1	18.1	17.3	16.0	48
50	18.2	17.9	17.8	17.8	17.2	15.7	50
52		17.7	17.5	17.5	17.0	15.4	52
54						15.0	54
组合 code	110	210	211	220	221	222	组合 code
倍率	3	3	3	2	2	2	倍率
吊钩重量			1.3				吊钩重量



起重性能表

Lifting capacities




T 24.5~44.3m

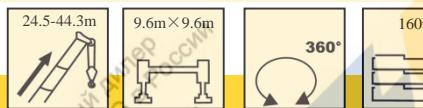

	24.5+7.5 m	29.5+7.5 m	34.4+7.5 m	34.4+7.5 m	39.4+7.5 m	44.3+7.5 m	
22	42 m	22					
24	30.2	30.2	30.2	30.8	28.0	26.5	24
26	28.4	28.5	28.6	29.0	26.7	25.3	26
28	27.0	27.1	27.1	27.5	25.5	24.1	28
30	25.6	25.7	25.9	26.2	24.2	23.1	30
32	24.4	24.5	24.6	25.0	23.3	22.1	32
34	23.5	23.6	23.8	24.0	22.4	21.2	34
36	22.6	22.7	22.8	23.1	21.6	20.4	36
38	22.0	22.1	22.1	22.3	21.6	20.9	38
40	21.6	21.5	21.5	21.6	20.9	19.6	40
42	21.3	21.2	21.1	21.1	20.3	19.0	42
44	21.2	21.1	20.7	20.7	19.9	18.6	44
46	21.0	20.6	20.4	20.4	19.8	18.3	46
48		20.1	19.8	19.8	19.6	18.2	48
组合 code	110	210	211	220	221	222	组合 code
倍率	3	3	3	3	3	3	倍率
吊钩重量			1.3				吊钩重量

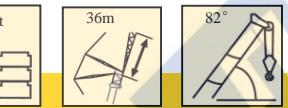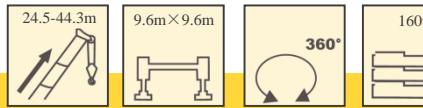

	24.5+7.5 m	29.5+7.5 m	34.4+7.5 m	34.4+7.5 m	39.4+7.5 m	44.3+7.5 m	
18	36 m	18					
20	42.4	42.6	42.2	43.0	33.4	31.1	20
22	39.5	39.9	39.7	40.3	31.5	29.6	22
24	36.9	37.2	37.3	37.7	29.6	28.2	24
26	32.0	33.1	34.1	34.7	28.2	26.8	26
28	28.6	28.7	28.7	29.0	26.9	25.6	28
30	27.4	27.3	27.4	27.5	26.4	24.4	30
32	26.4	26.2	26.2	26.4	25.6	23.5	32
34	25.6	25.3	25.4	25.5	24.7	22.6	34
36	25.0	24.7	24.6	24.7	23.9	22.6	36
38	24.8	24.5	24.3	24.2	23.4	21.9	38
40		24.1	23.9	23.8	22.8	19.7	40
42						18.9	42
组合 code	110	210	211	220	221	222	组合 code
倍率	4	4	4	4	3	3	倍率
吊钩重量			1.9				吊钩重量

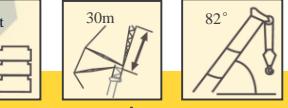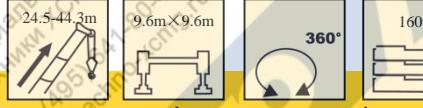


	24.5+7.5 m	29.5+7.5 m	34.4+7.5 m	34.4+7.5 m	39.4+7.5 m	44.3+7.5 m	
16	30 m	16					
18	48.1	48.1	48.0	48.3	43.3	35.7	18
20	44.3	44.5	44.6	45.0	40.8	33.6	20
22	41.0	41.2	41.4	41.8	38.3	31.5	22
24	38.4	38.7	38.9	39.1	36.0	29.8	24
26	36.5	36.6	36.7	36.9	32.9	28.4	26
28	34.8	32.7	33.5	33.7	28.6	27.1	28
30	30.9	29.5	29.3	29.4	28.6	26.1	30
32	29.2	28.8	28.5	28.5	27.6	25.3	32
34	29.1	28.9	28.2	28.1	27.0	24.7	34
36		28.7	27.9	27.8	26.8	23.5	36
组合 code	110	210	211	220	221	222	组合 code
倍率	4	4	4	4	4	3	倍率
吊钩重量			1.9				吊钩重量


起重性能表

Lifting capacities


T 24.5~44.3m

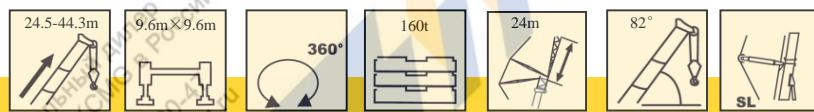

	24.5+7.5 m	29.5+7.5 m	34.4+7.5 m	34.4+7.5 m	39.4+7.5 m	44.3+7.5 m	
14	54.0	54.4	54.4	55.0			14
16	49.7	49.8	50.2	50.8	48.5	46.5	16
18	46.1	45.9	46.3	46.8	45.6	43.6	18
20	43.0	42.7	43.2	43.6	42.7	40.6	20
22	40.9	40.2	40.8	40.9	40.0	38.0	22
24	39.8	38.7	39.0	39.1	37.9	35.9	24
26	40.2	38.2	38.0	37.9	36.7	31.0	26
28		40.4	38.2	37.9	35.9	29.6	28
30						29.1	30
组合 code	110	210	211	220	221	222	组合 code
倍率	5	5	5	5	4	4	倍率
吊钩重量			1.9				吊钩重量

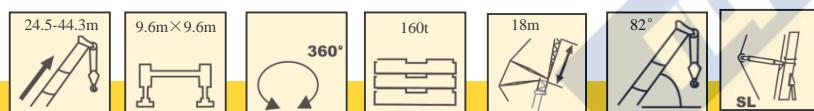

	24.5+7.5 m	29.5+7.5 m	34.4+7.5 m	34.4+7.5 m	39.4+7.5 m	44.3+7.5 m	
12	62.5	53.2					14
13	59.1	50.3					16
14	56.2	47.7	56.9	57.3	55.5	52.3	18
16	52.0	44.2	52.7	53.1	51.7	48.9	20
18	49.1	41.8	48.9	49.4	48.1	45.5	22
20	48.5	41.3	46.5	46.7	45.2	42.7	24
22			45.8	45.7	43.4	40.4	26
24						39.4	28
组合 code	110	210	211	220	221	222	组合 code
倍率	5	5	5	5	5	5	倍率
吊钩重量			1.9				吊钩重量

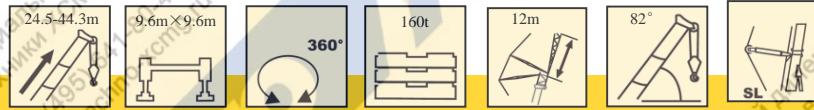



	24.5+7.5 m	29.5+7.5 m	34.4+7.5 m	34.4+7.5 m	39.4+7.5 m	44.3+7.5 m	
9	77.4						9
10	73.2	71.9					10
11	68.9	68.5					11
12	65.7	65.1	64.8	64.9	63.4	61.0	12
13	63.1	62.0	62.2	62.3	60.9	58.4	13
14	61.5	59.7	59.7	59.8	58.3	55.9	14
16		59.1	57.1	57.1	54.7	51.6	16
18						48.6	18
组合 code	110	210	211	220	221	222	组合 code
倍率	6	6	6	6	6	5	倍率
吊钩重量			1.9				吊钩重量

符号标识

Description of symbols

常规标识

General symbols

	吊臂长度 Boom length		车桥 Axe
	工作幅度 Radius		行驶速度 Driving speed
	吊臂仰角 Boom angle		爬坡能力 Grade ability
	固定副臂长度 Fixed jib length		轮胎 Tires
	副臂安装角 Jib offset angle		平衡重 Counterweight
	超起 Super lifting device		上车 Superstructure
	变幅副臂 Boom extension		底盘 Chassis
	风电臂 Jib for wind turbine		360°全回转 360° rotation
	支腿 Outriggers		卷扬 Winch
	吊钩 Hook block		

主要技术参数表

Transportation plan

类别 Category	项目 Item	单位 Unit	参数 Parameter
尺寸参数 Dimensions	外形尺寸 (长×宽×高) Outline size (lengthch×width×height)	mm	18090×3000×4000
	轴距 Wheel base	mm	1650+2180+1650+2580+1650+1650
	轮距 (前/后) Track (Front/ Rear)	mm	2590/2590/2590/2590/2590/2590/2590
	前悬/后悬 Front/ Rear overhang	mm	2795/2060
	前伸/后伸 Front/ Rear extension	mm	1875/0
重量参数 Weight	最大允许总质量	kg	84000
	一轴 1st axle	kg	12000
	二轴 2nd axle	kg	12000
	三轴 3rd axle	kg	12000
	四轴 4th axle	kg	12000
	五轴 5th axle	kg	12000
	六轴 6th axle	kg	12000
	七轴 7th axle	kg	12000
动力参数 Power	发动机型号 Engine model	——	OM502LA.E3B/2 OM502LA.E3A/3
	额定功率/转速 Engine rated power/rpm	kW/(r/min)	442.6/1800 421.5 /1800
	最大输出扭矩/转速 Engine rated torque/rpm	N.m/(r/min)	2800/1300 2700 /1300
行驶参数 Travel	最高车速 Max. travel speed	km/h	≥76
	最低稳定车速 Min. travel speed	km/h	2
	最小转弯直径 Min. turning diameter	m	≤24
	臂头最小转弯直径 Min. turning diameter at boom tip	m	≤29.2
	最小离地间隙 Min. ground clearance	mm	280
	接近角 Approach angle	°	16
	离去角 Departure angle	°	17
	制动距离 (制动初速度为30km/h) Braking distance (at 30 km/h)	m	≤10
	最大爬坡能力 Max. grade ability	%	≥42
	百公里油耗 Fuel consumption per 100 km	L	105
噪音 Noise	加速行驶机外噪声 Exterior noise level	dB(A)	≤84
	驾驶员耳旁噪声 Noise level at seated position	dB(A)	≤90

主要技术参数表

Transportation plan

类别 Category	项目 Item		单位 Unit	参数 Parameter
主要性能参数 Main performance	最大额定总起重量 Max. total rated lifting capacity		t	450
	最小额定工作幅度 Min. rated working radius		m	3
	转台尾部回转半径 Turning radius at turntable tail		mm	6900
	最大起重力矩 Max. load moment	基本臂 Base boom	kN.m	13500
		最长主臂 Fully-extended boom	kN.m	3680
	支腿跨距 Outrigger span	纵向 Longitudinal	m	9.6
		横向 Lateral	m	9.6
	起升高度 Hoist height	基本臂 Base boom	m	16
		最长主臂 Fully-extended boom	m	80
		最长主臂+副臂 Fully-extended boom + Jib	m	117
		最长主臂+变幅副臂 Fully-extended boom + Luffing Jib	m	130
工作速度参数 Working speed	起重臂长度 Boom length	基本臂 Base boom	m	15.3
		最长主臂 Fully-extended boom	m	80
		最长主臂+副臂 Fully-extended boom + Jib	m	117.9
		最长主臂+变幅副臂 Fully-extended boom + Luffing Jib	m	135.3
		副臂安装角 Jib offset angle	°	0、20、40
	起重臂起臂时间 Boom raising time		s	≤90
	起重臂全伸时间 Boom fully extended time		s	≤900
	最大回转速度 Max. slewing speed		r/min	≥1.2
	支腿收放时间 Outrigger extending and retracting time	水平支腿 Outrigger beam	收 Retracting	s
			放 Extending	s
		垂直支腿 Outrigger jack	收 Retracting	s
			放 Extending	s
噪声 Noise	起升速度(单绳,第四层,空载) Hoisting speed (single line, 4th layer, no load)	主起升机构 Main winch	m/min	≥135
		变幅副臂变幅卷扬 Auxiliary winch of Luffing Jib	m/min	≥40
	机外辐射 Exterior noise level	dB (A)	≤124	
	司机位置处 Noise level at seated position	dB (A)	≤90	

注意事项

Notes

- 表中额定总起重量值，是在平整的坚固地面上本起重机能够保证的最大总起重量，包括吊钩和吊具的重量，所以为了估算重物重量，必须减去上述的装置重量。
- 表中的工作幅度为起吊重物离地时起重物到起重机回转轴线的水平距离，是包括起重臂变形量在内的实际值，因而起吊前应考虑起重臂变形量。
- 只允许在5级(瞬时风速14.1m/s，风压125N/m²)风以下进行作业。
- 吊重前操作者必须对物体的重量和工作范围了解后选择合适的作业工况，严禁超出表中的数值。幅度及臂长在相邻两个数值之间时，应依据两个数值中较小值确定起重作业。
- 应按主臂仰角范围作业，即使是空载，也不应使主臂仰角处于范围外，谨防整机倾翻。
- 表中的主臂长度应要按照每节臂的伸缩要求进行伸出。

- The total rated loads given in the rated load charts are the maximum lifting capacity when the crane is set up on firm and level ground, which includes the weight of the hook block and slings. The weight of above-mentioned devices should be deducted from the rated lifting load.
- The working radius shown in the rated load charts is the radius when the load is lifted off the ground, and it is the actual value including loaded boom deflection. Take boom deflection into consideration before beginning a lifting operation.
- A lifting operation is permissible only when the wind force is below grade 5 (instantaneous wind speed is 14.1 m/s, wind pressure is 125 N/m²).
- Before beginning lifting operation, the operator should know the weight of the load to be lifted and its working range, and then select proper working conditions. Never operate the crane beyond the limit shown in the chart. Use the lower value from the chart when the boom length or working radius is between the range of values.
- Observe the boom angle limit. Never operate the crane with the boom angle beyond the recommended limit even if a load is not being carried. Otherwise, the crane will tip.
- The boom should be extended according to the telescoping code shown by digits, which means the percentage of boom sections extended.



徐工集团

地址：江苏省徐州市经济技术开发区高新路68号

Add : No.68 Gaoxin Road, Xuzhou economic and technological development zone, Jiangsu ,China

电话(Tel) : +86-516-83462242/83462350

质量监督电话(Quality Inquiry Tel) : +86-516-87888268

备件电话(Spare Parts Tel) : +86-516-83461542

邮编(Post Code) : 221004

网址(Web) : www.xcmg.com/qizhongji

服务热线 Service Tel
400-110-9999
400-001-5678



本印刷品不属于合同。出于产品不断改进的需要，我们保留对产品型号、参数、配置进行变更的权利，恕不另行通知。图片仅供参考，具体产品以实物为准。图片中产品可能并非标准配置，部分部件可能需要另行购置。办理牌照和上路行驶需遵守当地法规。

This print does not belong to the contract. We reserve the right to modify the design (such as product model, parameters and configuration) without notice for improvement. The pictures are just for reference. The product in the picture may not be standard configuration. Some parts need to be purchased separately. Conform to the local laws for license application and road traveling.