

\* 可变换的其它安装方式同我们协商


Mounting possibilities Consult us

平头系列 Topless

# XGT7020-12

技术状态 STATUS

XGT7020-12

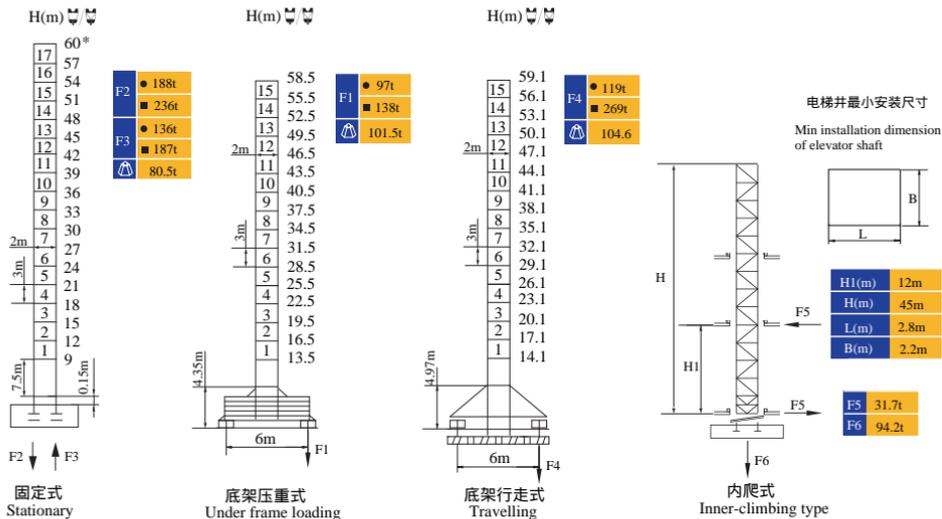


H 臂根铰点高度 Height of hinged point at jib root ● 工作状态 In service ■ 非工作状态 Out of service

▲ 不含平衡重最大臂长最大工作高度时的自重 Without load and ballast with longest jib and maximum height

\* 非工作状态爬升架降到底部 Over the climbing frame to the bottom of tower body when tower crane is out of service

## 附着 ANCHORAGES

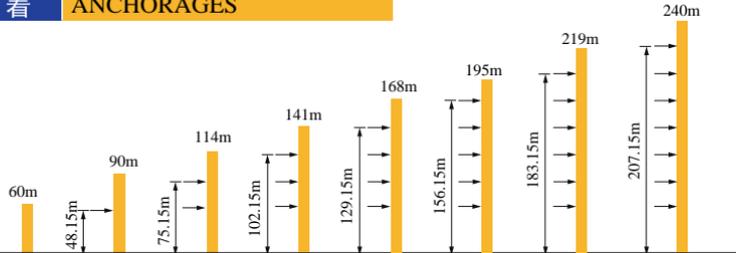

\* 非工作状态爬升架降到底部 Over the climbing frame to the bottom of tower body when tower crane is out of service

\* 如需达到更高的高度, 请与我们联系! For greater heights, consult us!

## 起重特性 LOAD DIAGRAMS

起重臂 (m) jib	R <sub>min</sub>	R(C <sub>max</sub> )	C <sub>max</sub>	幅度 (m) Range										
				20	30	35	40	45	50	55	60	65	70	
70m		3.0	28.6	6.0t	6000	5766	4825	4119	3569	3130	2770	2471	2217	2000
		3.0	15.1	12t	8836	5562	4626	3924	3379	2942	2585	2287	2035	1800
65m		3.0	31.6	6.0t	6000		5334	4567	3970	3492	3101	2776	2500	
		3.0	16.5	12t	9760	6177	5154	4386	3769	3311	2920	2595	2300	
60m		3.0	34.4	6.0t	6000		5801	5053	4402	3881	3455	3100		
		3.0	18.0	12t	10733	6826	5710	4873	4221	3701	3274	2900		
55m		3.0	38.0	6.0t	6000			5665	4946	4371				3900
		3.0	19.9	12t	11956	7642	6409	5484	4765	4190				3700
50m		3.0	40.4	6.0t	6000				5312	4700				
		3.0	21.2	12t	12000	8190	6879	5896	5131				4500	
45m		3.0	42.3	6.0t	6000				5400					
		3.0	22.2	12t	12000	8623	7250	6220	5600					
40m		3.0	40.0	6.0t	6000									
		3.0	22.5	12t	12000	8729	7340	6300						
35m		3.0	35.0	6.0t	6000									
		3.0	22.2	12t	12000	8564	7200							
30m		3.0	30.0	6.0t	6000									
		3.0	22.0	12t	12000	8500								

★其他起重性能需求，请与我们联系！ Anyother lifting capacity, consult us!

## 配重配置 BALLAST

Counter-jib ballast		3100 - 2000 - 1500			
		 (kg)	PZ3100	PZ2000	PZ1500
70m	17.535m	21000	5	2	1
65m	17.535m	21000	5	2	1
60m	17.535m	19500	5	2	0
55m	17.535m	19000	5	1	1
50m	17.535m	17900	4	2	1
45m	17.535m	16400	4	2	0
40m	17.535m	14400	4	1	0
35m	17.535m	12400	4	0	1
30m	17.535m	10800	3	0	1

## 传动机构 Mechanisms

机构 Mechanisms	图例 Example	机构代号 Model	速度 (m/min) Speed	起重量 (t) Hoist Weight	容绳量 Rope Capacity	功率 (kW) Power	
起升 Hoisting	▲ ● ▼	55JLF30A		0-90	2.1	695m > 695m*	55
				0-68	4.2		
				0-45	6.0		
				0-45	4.2		
				0-34	8.4		
				0-22.5	12.0		
变幅 Trolleying	◀▶	6JXF5	0-63m/min		5.5		
回转 Slewing		JH12CT6	0-0.66r/min		2×7.5		
行走 Travelling		RT	0-25m/min		4×4		
电源 Main Supply					~ 380V (±10%) 50Hz		
总功率 (不含顶升和行走) Gross Power (Excluding climbing and travelling)					75.5kW		

\* 请与我们联系 Consult us, Please!

此样本所列技术参数不受法律约束，具体请详见相应产品说明书

These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.

V. 2017-07A1