


XGTT200A(7015L-10)

外形尺寸


DIMENSIONS

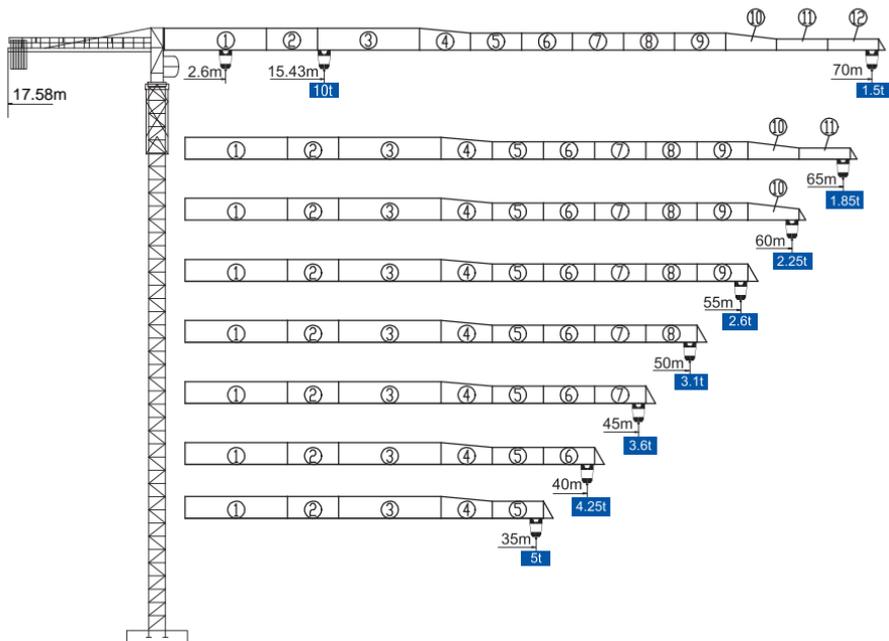


固定式
Stationary



底架压重式
Under frame loading



底架行走式
Travelling



内爬式
Inner-climbing type


* 可变换的其他安装方式同我们协商

Mounting possibilities Consult us

平头系列 Topless

XGTT200A(7015L-10)

技术状态 STATUS

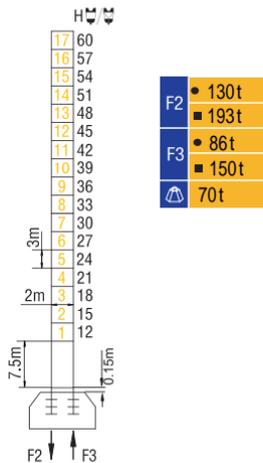


H 吊钩高度 Height of hook

● 工作状态 In service

■ 非工作状态 Out of service

△ 不含平衡重最大臂长最大工作高度时的自重 Without load and ballast with longest jib and maximum height

附着 ANCHORAGES

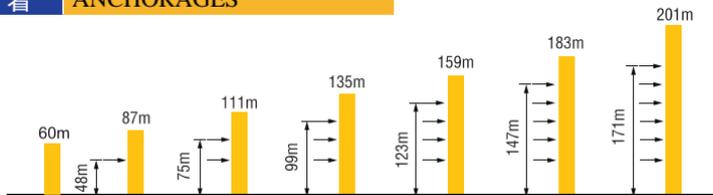

* 如需达到更高的高度, 请与我们联系! For greater heights, consult us!

XGTT200A(7015L-10)

起重特性 LOAD DIAGRAMS

起重臂 (m) Jib	R _{min}	R(C _{max})	C _{max}	幅度 (m) Range												
				15	20	25	30	35	40	45	50	55	60	65	70	
70		2.6	28.72	5t	5000			4747	3935	3326	2853	2474	2164	1906	1687	1500
		2.6	15.43	10t	10000	7478	5773	4637	3825	3216	2743	2364	2054	1796	1577	1390
65		2.6	30.5	5t	5000			4237	3591	3088	2686	2356	2082	1850		
		2.6	16.39	10t	10000	8006	6196	4989	4127	3481	2978	2576	2246	1972	1740	
60		2.6	32.2	5t	5000			4525	3843	3312	2887	2540	2250			
		2.6	17.3	10t	10000	8510	6599	5325	4415	3733	3202	2777	2430	2140		
55		2.6	32.76	5t	5000			4620	3926	3386	2954	2600				
		2.6	17.6	10t	10000	8676	6732	5436	4510	3816	3276	2844	2490			
50		2.6	33.99	5t	5000			4829	4109	3548	3100					
		2.6	18.27	10t	10000	9043	7025	5680	4719	3999	3438	2990				
45		2.6	34.39	5t	5000			4896	4167	3600						
		2.6	18.48	10t	10000	9159	7118	5758	4786	4057	3490					
40		2.6	34.95	5t	5000			4991	4250							
		2.6	18.78	10t	10000	9325	7251	5868	4881	4140						
35		2.6	35	5t	5000											
		2.6	19.12	10t	10000	9516	7404	5996	4990							

★其他起重性能需求, 请与我们联系! Anyother lifting capacity, consult us!

配重配置 BALLAST

Counter-jib ballast		3450 (kg) / 2500 (kg) / 1450 (kg)			
		 (kg)	PZ3450	PZ2500	PZ1450
70m	16.8m	19200	4	1	2
65m	16.8m	17750	4	1	1
60m	16.8m	16700	4	0	2
55m	16.8m	15250	4	0	1
50m	16.8m	14300	3	1	1
45m	16.8m	12300	2	1	2
40m	16.8m	10850	2	1	1
35m	16.8m	8850	1	1	2

XGTT200A(7015L-10)

传动机构 Mechanisms

机构 Mechanisms	图例 Example	机构代号 Model	速度 (m/min) Speed	起重量 (t) Hoist Weight	容绳量 Rope Capacity	功率 (kW) Power	
起升 Hoisting		45JLF25A	↑	0~40	5	615 m >615m*	45
				0~60	3.5		
				0~80	1.7		
			↓	0~20	10		
				0~30	7		
				0~40	3.5		
变幅 Trolleying		4JXF4	0~58m/min			4	
回转 Slewing		JH02B/145HL120	0~0.68r/min			2x7.5	
行走 Travelling		RT	0~25m/min			4x4	
电源 Main Supply					~380 (±10%) 50Hz		
总功率 (不含顶升和行走)		Gross Power (Excluding climbing and travelling)				64kw	

★ 请与我们联系 Consult us, Please!

本样册技术参数不受法律约束, 具体以相应产品说明书为准

These brochure of specifications and data are not legally binding, specific instructions please based on our product manuals.

V. 2017-01A1