


XGT8039-25 XGT8039-25A

外形尺寸 DIMENSIONS

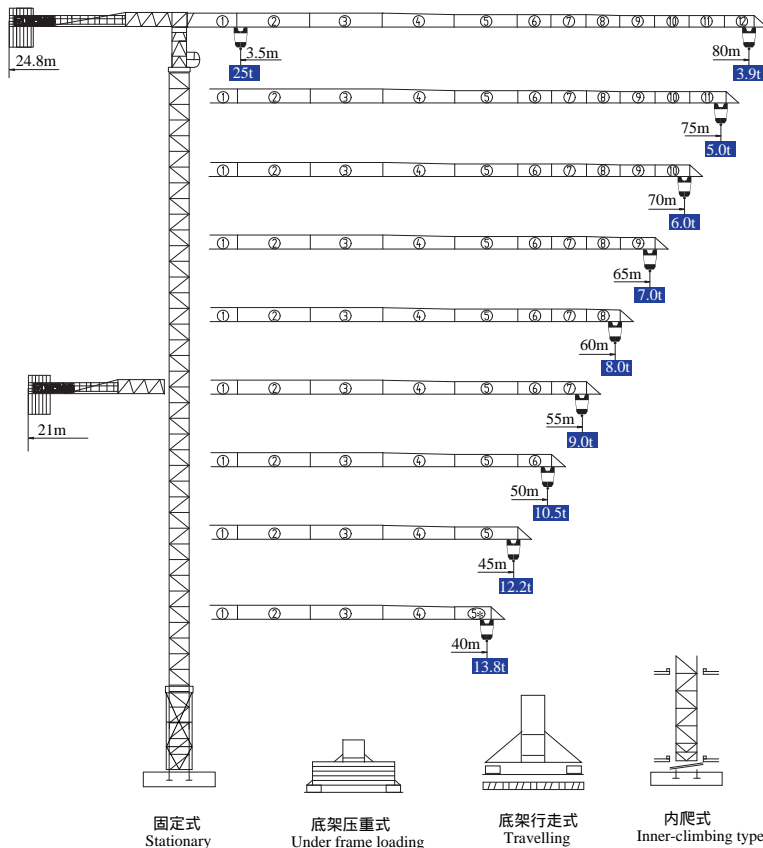

固定式
Stationary

底架压重式
Under frame loading

底架行走式
Travelling

内爬式
Inner-climbing type





* 可变换的其他安装方式同我们协商 Mounting possibilities Consult us
需配置非标结构 Need for non-standard structure

平头系列 Topless

XGT8039-25

XGT8039-25A

技术状态 STATUS

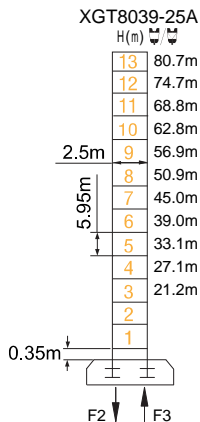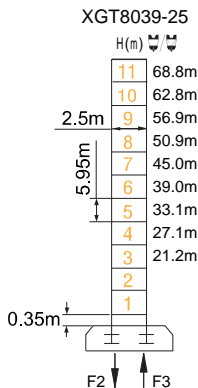

H 吊钩高度 Height of The Hook

● 工作状态 In-service


■ 非工作状态 Out-of-service

▲ 最大臂长最大独立高度时的整机自重 (不含配重、压重、吊重)


Weight with max free-standing height and max jib (without counter-weight and load)

附着 ANCHORAGES

XGT8039-25

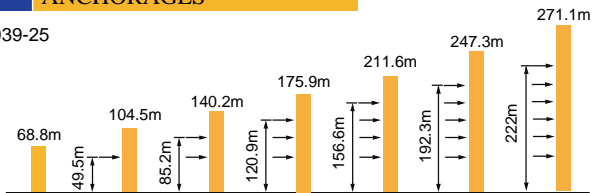



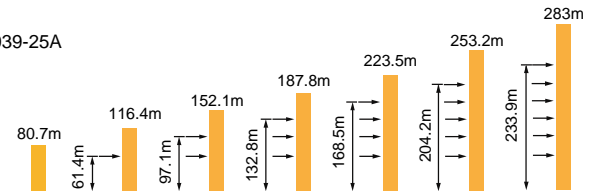















XGT8039-25A






* 如需达到更高的高度, 请与我们联系! For greater heights, consult us!

起重特性 LOAD DIAGRAMS

起重臂 (m) jib	R _{min}	R(C _{max})	C _{max}	幅度 (m) Range											
				20	30	40	45	50	55	60	65	70	75	80	
80m		3.5	31.37	12.5t	12500	12500	9449	8216	7229	6422	5749	5180	4692	4269	3900
		3.5	16.47	25t	20249	12849	9149	7916	6929	6122	5449	4880	4392	3969	3600
75m		3.5	35.24	12.5t	12500	10818	9149	9433	8324	7418	6662	6023	5474	5000	
		3.5	18.50	25t	22987	14674	10518	9133	8024	7118	6362	5723	5174	4700	
70m		3.5	37.84	12.5t	12500	11737	10249	9059	8086	7274	6588	6000			
		3.5	19.87	25t	24842	15899	11437	9949	8759	7786	6974	6288	5700		
65m		3.5	39.73	12.5t	12500	12406	10844	9594	8572	7720	7000				
		3.5	20.86	25t	25000	16791	12106	10544	9294	8272	7420	6700			
60m		3.5	40.91	12.5t	12500	11216	9929	8877	8000						
		3.5	21.48	25t	25000	17349	12524	10916	9629	8577	7700				
55m		3.5	41.39	12.5t	12500	11366	10064	9000							
		3.5	21.73	25t	25000	17574	12693	11066	9764	8700					
50m		3.5	42.93	12.5t	12500	11849	10500								
		3.5	22.54	25t	25000	18299	13237	11549	10200						
45m		3.5	44.04	12.5t	12500	12200									
		3.5	23.12	25t	25000	18824	13631	11900							
40m		3.5	40.00	12.5t	12500										
		3.5	23.37	25t	25000	19049	13800								

★其他起重性能需求，请与我们联系！ Anyother lifting capacity, consult us!











配重配置 BALLAST

Counter-jib ballast			5500 - 3000 - 2000		
		 (kg)	PZ5500	PZ3000	PZ2000
80/75m	24.8m	35000	6	0	1
70m	24.8m	33000	6	0	0
65m	24.8m	32500	5	1	1
60m	24.8m	30500	5	1	0
55m	21.0m	38050	7	0	0
50m	21.0m	36000	6	1	0
45/40m	21.0m	32500	5	1	1

XGT8039-25

XGT8039-25A

传动机构 Mechanisms

机构 Mechanisms	图例 Example	机构代号 Model	速度 (m/min) Speed	起重量 (t) Hoist Weight	容绳量 Rope Capacity	功率 (kW) Power
起升 Hoisting		110JLF63	 0~45	12.5	660m >660m [*]	110
			 0~67	6.25		
 0~90	3					
 0~22.5	20					
			 0~32	10		
			 0~45	5		
变幅 Trolleying		15DFV16	0-60m/min			15
回转 Swivling		JH12CT5	0-0.6r/min			3×9
行走 Travelling		RT	0-25m/min			6×5.2
电源 Main Supply					~380V(±10%) 50Hz	
总功率 (不含顶升和行走) Gross Power (Excluding climbing and travelling)					152kW	

★ 请与我们联系 Consult us, Please!

本样册技术参数不受法律约束, 具体以相应产品说明书为准

These brochure of specifications and data are not legally binding, specific instructions please based on our product manuals.

V. 2017-11A1