


XGTL500(6048-25)

外形尺寸 DIMENSIONS

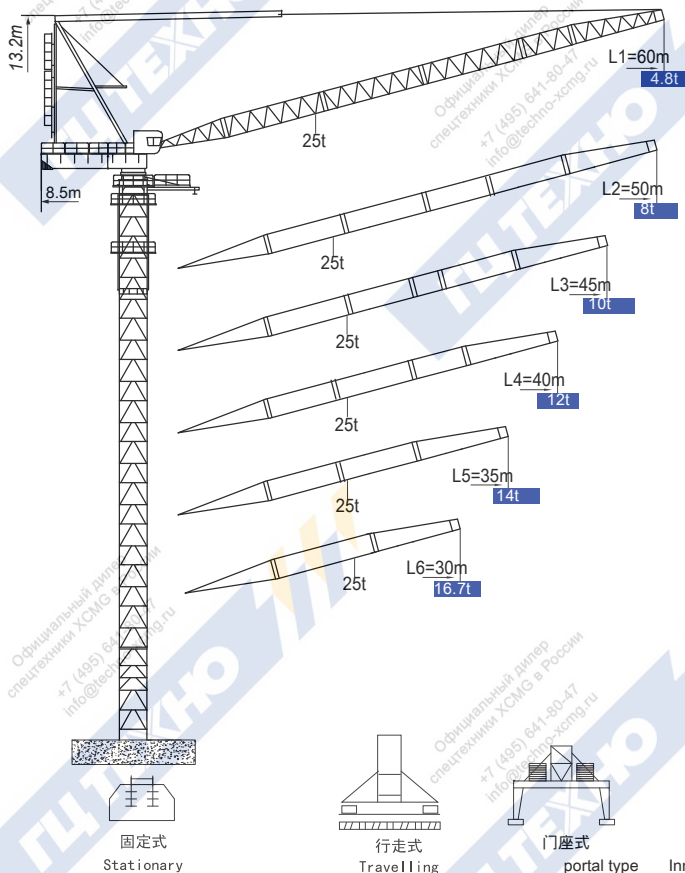


★ 可变换的其他安装方式同我们协商 Mounting possibilities, Consult

ust

动臂系列
Luffing

XGTL500(6048-25)

技术状态 STATUS



F1	● 285t
	■ 323t
F2	● 189t
	■ 230t
	▲ 147t

H 臂根铰点高度 Height of hinged point at jib root


● 工作状态 In service

■ 非工作状态 Out of service

▲ 最大臂长最大独立高度时的整机自重 (不含配重、压重、吊重)

Weight with max free-standing height and max jib (without counter-weight and load)



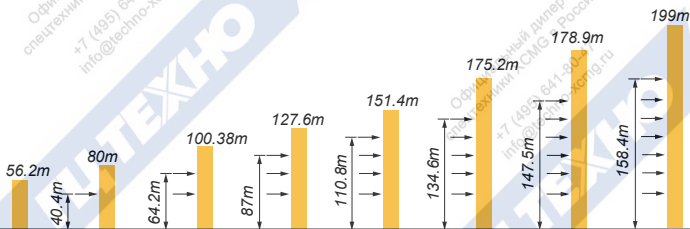











附着 Anchorages



* 如需达到更高的高度, 请与我们联系! For greater heights, consult us!

XGTL500(6048-

起重特性

幅度 (m) Range	R _{min}	R _{Cmax}	C _{max}	5.5 ~ 20	25	30	35	40	45	50	55	60
60m		6.4	35.4	12500	12500			10308	8436	6956	5764	4800
		6.4	21.3	25000	25000	20231	15614	12354	9938	8085	6629	5468
55m		6.0	35.8	12500	12500			10560	8716	7261	6100	
		6.0	21.4	25000	25000	20371	15814	12598	10217	8395	6969	5854
50m		5.5	37.5	12500	12500			11383	9486	8000		
		5.5	22.1	25000	25000	21526	16830	13518	11069	9200	7757	
45m		5.1	38.6	12500	12500			11891	10000			
		5.1	22.6	25000	25000	22086	17377	14058	11611	9761		
40m		4.6	38.8	12500	12500			12000				
		4.6	22.5	25000	25000	22011	17391	14143	11765			
35m		4.2	35.0	12500	12500							
		4.2	22.1	25000		21535	17100	14000				
30m		3.7	30.0	12500	12500							
		3.7	21.6	25000	25000	20942	16700					

★ 其他起重性能需求，请与我们联系！ Another lifting capacity, consult us!

配重配置 Ballast

Counter-jib	ballast		5714(kg)
		 (kg)	P2 5714
60m	8.5m	40000	7
50m	8.5m	40000	7
45m	8.5m	40000	7
40m	8.5m	40000	7
35m	8.5m	40000	7
30m	8.5m	40000	7

XGTL500(6048-25)

传动机构 Mechanisms

机构 Mechanisms	图例 Example	机构代号 Model	速度 (m/min) Speed	起重量 (t) Hoist Weight	容绳量 Rope Capacity	功率 (kW) Power	
起升 Hoisting		90LVF125DB		0~38	12.5	900m > 900m†	90
				0~76	6.2		
				0~152	1.64		
				0~19	25		
				0~38	12.5		
				0~76	4.14		
变幅 Trolleying		90DVF85B	≤ 3 min	15°~85°		90	
回转 Slewing		11RVF		00:6 r/min		2×11	
行走 Travelling		RT		0~25m/min		6×5.2	
电源 Main Supply					~380(±10%) 50Hz		
总功率 (不含提升和行走)			Gross Power (Excluding climbing and travelling)			202kW	

★ 请与我们联系 Consult us, Please!

本样册技术参数不受法律约束, 具体以相应产品说明书为准

These brochure of specifications and data are not legally binding, specific instructions please based on our product manuals.