


GTJZ1212 SCISSOR LIFTS

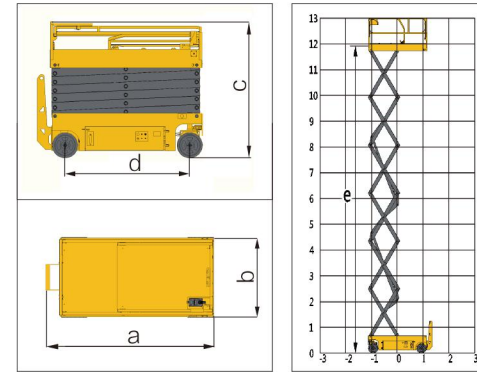

Technical Parameter


| Item | Unit | GTJZ1212 |
|---|-------|-----------|
| a Overall Length | m | 2.49 |
| b Overall Width | m | 1.19 |
| c Overall Height(Guardrailfolding) | m | 2.6(2.04) |
| d Wheel Base | m | 1.88 |
| Maximum Working Height | m | 13.8 |
| Maximum platform Height | m | 11.8 |
| Maximum Load Capacity | kg | 320 |
| Extension Platform Load | kg | 115 |
| Platform Size | m | 2.28x1.12 |
| Platform Extension Length | m | 0.9 |
| Lifting Speed of Working Platform | s | 60 |
| Falling Speed of Working Platform | s | 52 |
| Total Weight | Kg | 3140 |
| Travel Speed(High Speed) | Km/h | 3.2 |
| Travel Speed(Low Speed) | Km/h | 0.8 |
| Max.Travel Platform Height | m | 11.8 |
| Minimum Turning Radius | m | 0 |
| Minimum Ground Clearance (Pot Hole Protector Rises/Falls) | m | 100/20 |
| Maximum Grade Ability | % | 25 |
| Tire Specification | - | 381x127 |
| Battery | V(Ah) | 4x12(300) |
| Charger | A | 30 |
| Warning Angle of Inclination both sides/front or rear | ° | 1.5/3 |

Features

- MEASUREMENTS**
GTJZ1212
- 13.8m working height
 - Up to 320 kg lift capacity
- PRODUCTIVITY**
- 2.28 x 1.12m steel platform
 - 0.9 m extension deck
 - Dual front wheel drive
 - 25% grade ability
 - Platform control with battery charge indicator and diagnostic display
 - Manual platform lowering valve
 - Emergency stop at both platform and ground controls
 - Rear wheel multiple disc brakes
 - Front wheel hydraulic dynamic braking
 - Manual brake release
 - Solid non-marking tyres
 - Pothole guards
 - Tilt alarm
 - Hour meter
 - Descent alarm
 - Electronic horn
 - Dual flashing beacons
 - Motion alarm
- POWER**
- 48 V DC (four 12 V 300 Ah batteries)
- Options**
- Air line to platform
 - Platform work lights
 - Maintenance-free batteries
 - 240 V power to platform
 - Pressure sensor(CE)
 - Angle sensor(CE)
 - Load alarm system(CE)



GTJZ1412 SCISSOR LIFTS

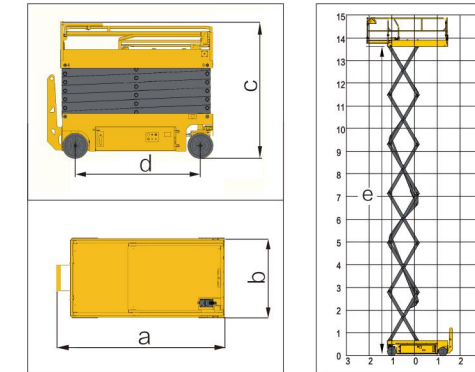

Technical Parameter

| Item | Unit | GTJZ1412 |
|---|-------|-----------|
| a Overall Length | m | 2.85 |
| b Overall Width | m | 1.25 |
| c Overall Height(Guardrailfolding) | m | 2.6(2.04) |
| d Wheel Base | m | 2.24 |
| Maximum Working Height | m | 15.7 |
| Maximum platform Height | m | 13.7 |
| Maximum Load Capacity | kg | 230 |
| Extension Platform Load | kg | 115 |
| Platform Size | m | 2.64x1.12 |
| Platform Extension Length | m | 0.9 |
| Lifting Speed of Working Platform | s | 68 |
| Falling Speed of Working Platform | s | 62 |
| Total Weight | Kg | 3380 |
| Travel Speed(High Speed) | Km/h | 3.2 |
| Travel Speed(Low Speed) | Km/h | 0.8 |
| Max.Travel Platform Height | m | 13.7 |
| Minimum Turning Radius | m | 0 |
| Minimum Ground Clearance (Pot Hole Protector Rises/Falls) | m | 100/20 |
| Maximum Grade Ability | % | 25 |
| Tire Specification | - | 381x127 |
| Battery | V(Ah) | 4x12(300) |
| Charger | A | 30 |
| Warning Angle of Inclination both sides/front or rear | ° | 1.5/3 |

Features

- MEASUREMENTS**
GTJZ1412
- 15.7m working height
 - Up to 320 kg lift capacity
- PRODUCTIVITY**
- 2.28 x 1.12m steel platform
 - 0.9 m extension deck
 - Dual front wheel drive
 - 25% grade ability
 - Platform control with battery charge indicator and diagnostic display
 - Manual platform lowering valve
 - Emergency stop at both platform and ground controls
 - Rear wheel multiple disc brakes
 - Front wheel hydraulic dynamic braking
 - Manual brake release
 - Solid non-marking tyres
 - Pothole guards
 - Tilt alarm
 - Descent alarm
 - Electronic horn
 - Hour meter
 - Dual flashing beacons
 - Motion alarm
- POWER**
- 48 V DC (four 12 V 300 Ah batteries)
- Options**
- Air line to platform
 - Platform work lights
 - Maintenance-free batteries
 - 240 V power to platform
 - Pressure sensor(CE)
 - Angle sensor(CE)
 - Load alarm system(CE)




Company Profile

XCMG Fire-fighting Safety Equipment Co., LTD, located in Xuzhou, Jiangsu Province, is a wholly-owned subsidiary of XCMG. Engaged in R&D, manufacturing and sales of mobile elevating work platform, XCMG provides customers with complete solutions to safe aerial operation. Since 2008, the company has actively worked hard on optimization of unified models and upgrading of scissor lifts series, articulating and telescopic boom lifts. The company's six technologies including multilevel integrated protection of aerial manned operation, three-dimensional space tracking and intelligent control are advanced in the industry. So far, the company has completed R&D of almost 30 products, including 6-14m scissor lifts, 14-24m articulating boom lifts and 22-58m telescopic boom lifts. All the new products have been certified by CE and KC. Having operated for several years, the industry has ascended to one of the top 2 industries in China and the company has become an industry giant in China.

The R & D expenditure of XCMG accounted for more than 10% of the total sales revenue every year, we have obtained more than 120 patents, including 22 invention patents. R & D of our products are strictly in accordance with Europe CE, North American ANSI standard, and all products have obtained CE certification. With many years of technical heritage, XCMG has fully launched the new series of mobile elevating work platform with the most valuable customer. New generation mobile elevating work platform, based on the advanced developed technology, systematic, modular, standardized design ideas, safe and reliable product experience, the four science and technology platform, nine advantages of technology for the rapid growth of aerial working platform market to provide complete Engineering Solutions! XCMG MEWP products have been exported to more than 30 countries, including USA, Mexico, Germany, Netherlands, Turkey, UAE, Kuwait, India, Indonesia, Malaysia, Vietnam, Philippines, Venezuela, Morocco, etc.



GTJZ0607 SCISSOR LIFTS

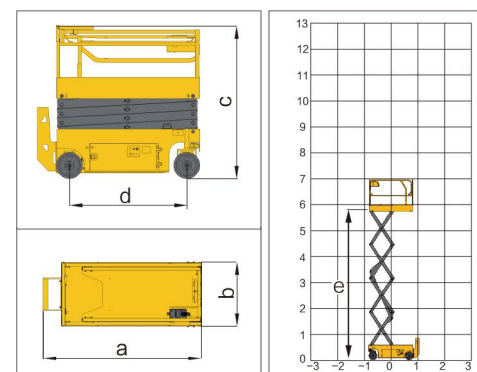

Technical Parameter


| Item | Unit | GTJZ0607 |
|---|-------|------------|
| a Overall Length | mm | 1882 |
| b Overall Width | mm | 760 |
| c Overall Height(Guardrailfolding) | mm | 2148(1770) |
| d Wheel Base | mm | 1360 |
| Maximum Working Height | m | 7.8 |
| Maximum platform Height | m | 5.8 |
| Maximum Load Capacity | kg | 230 |
| Extension Platform Load | kg | 115 |
| Platform Size | mm | 1655x740 |
| Platform Extension Length | mm | 900 |
| Lifting Speed of Working Platform | s | 18 |
| Falling Speed of Working Platform | s | 21 |
| Total Weight | Kg | 1520 |
| Travel Speed(High Speed) | km/h | 4 |
| Travel Speed(Low Speed) | km/h | 0.8 |
| Max.Travel Platform Height | m | 5.8 |
| Minimum Turning Radius | m | 0 |
| Minimum Ground Clearance (Pot Hole Protector Rises/Falls) | mm | 60/20 |
| Maximum Grade Ability | % | 25 |
| Tire Specification | - | 305/100 |
| Battery | V(Ah) | 4x6(225) |
| Charger | A | 30 |
| Warning Angle of Inclination both sides/front or rear | ° | 1.5/3 |

Features

- MEASUREMENTS**
GTJZ0607
- 7.8m working height
 - Up to 230 kg lift capacity
- PRODUCTIVITY**
- 1.66 x 0.74m steel platform
 - 0.9 m extension deck
 - Dual front wheel drive
 - 25% grade ability
 - Platform control with battery charge indicator and diagnostic display
 - Manual platform lowering valve
 - Emergency stop at both platform and ground controls
 - Rear wheel multiple disc brakes
 - Front wheel hydraulic dynamic braking
 - Manual brake release
 - Solid non-marking tyres
 - Pothole guards
 - Tilt alarm
 - Hour meter
 - Descent alarm
 - Electronic horn
 - Dual flashing beacons
 - Motion alarm
- POWER**
- 24 V DC (four 6 V 225 Ah batteries)
- Options**
- Air line to platform
 - Platform work lights
 - Maintenance-free batteries
 - 240 V power to platform
 - Pressure sensor(CE)
 - Angle sensor(CE)
 - Load alarm system(CE)



GTJZ0808 SCISSOR LIFTS

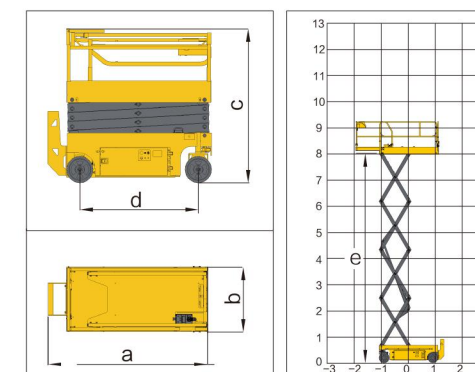


Technical Parameter


| Item | Unit | GTJZ0808 |
|---|-------|------------|
| a Overall Length | mm | 2485 |
| b Overall Width | mm | 830 |
| c Overall Height(Guardrailfolding) | mm | 2345(1965) |
| d Wheel Base | mm | 1877 |
| Maximum Working Height | m | 10 |
| Maximum platform Height | m | 8 |
| Maximum Load Capacity | kg | 230 |
| Extension Platform Load | kg | 115 |
| Platform Size | mm | 2276x825 |
| Platform Extension Length | mm | 900 |
| Lifting Speed of Working Platform | s | 30 |
| Falling Speed of Working Platform | s | 34 |
| Total Weight | Kg | 2170 |
| Travel Speed(High Speed) | km/h | 3.5 |
| Travel Speed(Low Speed) | km/h | 0.8 |
| Max.Travel Platform Height | m | 8 |
| Minimum Turning Radius | m | 0 |
| Minimum Ground Clearance (Pot Hole Protector Rises/Falls) | mm | 100/20 |
| Maximum Grade Ability | % | 25 |
| Tire Specification | - | 381x127 |
| Battery | V(Ah) | 4x6(225) |
| Charger | A | 30 |
| Warning Angle of Inclination both sides/front or rear | ° | 1.5/3 |

Features

- MEASUREMENTS**
GTJZ0808
- 10m working height
 - Up to 230 kg lift capacity
- PRODUCTIVITY**
- 1.66 x 0.83m steel platform
 - 0.9 m extension deck
 - Dual front wheel drive
 - 25% grade ability
 - Platform control with battery charge indicator and diagnostic display
 - Manual platform lowering valve
 - Emergency stop at both platform and ground controls
 - Rear wheel multiple disc brakes
 - Front wheel hydraulic dynamic braking
 - Manual brake release
 - Solid non-marking tyres
 - Pothole guards
 - Tilt alarm
 - Hour meter
 - Descent alarm
 - Electronic horn
 - Dual flashing beacons
 - Motion alarm
- POWER**
- 24 V DC (four 6 V 225 Ah batteries)
- Options**
- Air line to platform
 - Platform work lights
 - Maintenance-free batteries
 - 240 V power to platform
 - Pressure sensor(CE)
 - Angle sensor(CE)
 - Load alarm system(CE)

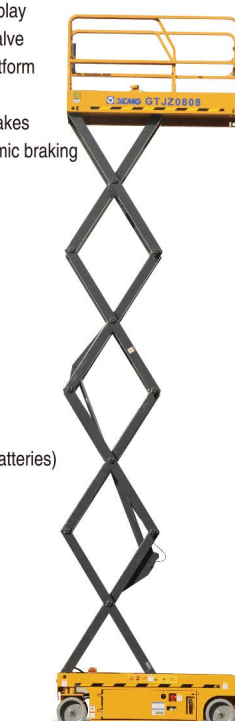

GTJZ1012 SCISSOR LIFTS

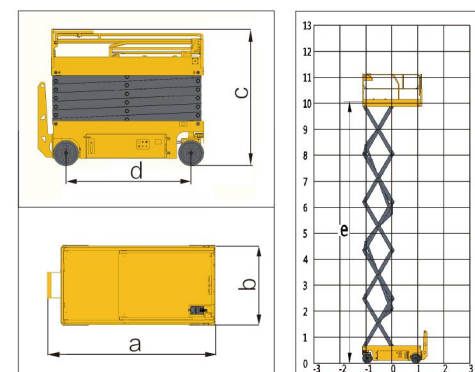

Technical Parameter

| Item | Unit | GTJZ1012 |
|---|-------|------------|
| a Overall Length | m | 2.49 |
| b Overall Width | m | 1.17 |
| c Overall Height(Guardrailfolding) | m | 2.47(1.91) |
| d Wheel Base | m | 1.88 |
| Maximum Working Height | m | 12 |
| Maximum platform Height | m | 10 |
| Maximum Load Capacity | kg | 320 |
| Extension Platform Load | kg | 115 |
| Platform Size | m | 2.28x1.12 |
| Platform Extension Length | m | 0.9 |
| Lifting Speed of Working Platform | s | 56 |
| Falling Speed of Working Platform | s | 43 |
| Total Weight | Kg | 2940 |
| Travel Speed(High Speed) | Km/h | 3.5 |
| Travel Speed(Low Speed) | Km/h | 0.8 |
| Max.Travel Platform Height | m | 10 |
| Minimum Turning Radius | m | 0 |
| Minimum Ground Clearance (Pot Hole Protector Rises/Falls) | m | 100/20 |
| Maximum Grade Ability | % | 25 |
| Tire Specification | - | 381x127 |
| Battery | V(Ah) | 4x6(240) |
| Charger | A | 30 |
| Warning Angle of Inclination both sides/front or rear | ° | 1.5/3 |

Features

- MEASUREMENTS**
GTJZ1012
- 12m working height
 - Up to 320 kg lift capacity
- PRODUCTIVITY**
- 2.28 x 1.12m steel platform
 - 0.9 m extension deck
 - Dual front wheel drive
 - 25% grade ability
 - Platform control with battery charge indicator and diagnostic display
 - Manual platform lowering valve
 - Emergency stop at both platform and ground controls
 - Rear wheel multiple disc brakes
 - Front wheel hydraulic dynamic braking
 - Manual brake release
 - Solid non-marking tyres
 - Pothole guards
 - Tilt alarm
 - Hour meter
 - Descent alarm
 - Electronic horn
 - Dual flashing beacons
 - Motion alarm
- POWER**
- 24 V DC (four 6 V 240 Ah batteries)
- Options**
- Air line to platform
 - Platform work lights
 - Maintenance-free batteries
 - 240 V power to platform
 - Pressure sensor(CE)
 - Angle sensor(CE)
 - Load alarm system(CE)

